


HEATHKIT[®] MANUAL

for the

DELUXE ANTENNA TUNER

Model SA-2060

595-2514

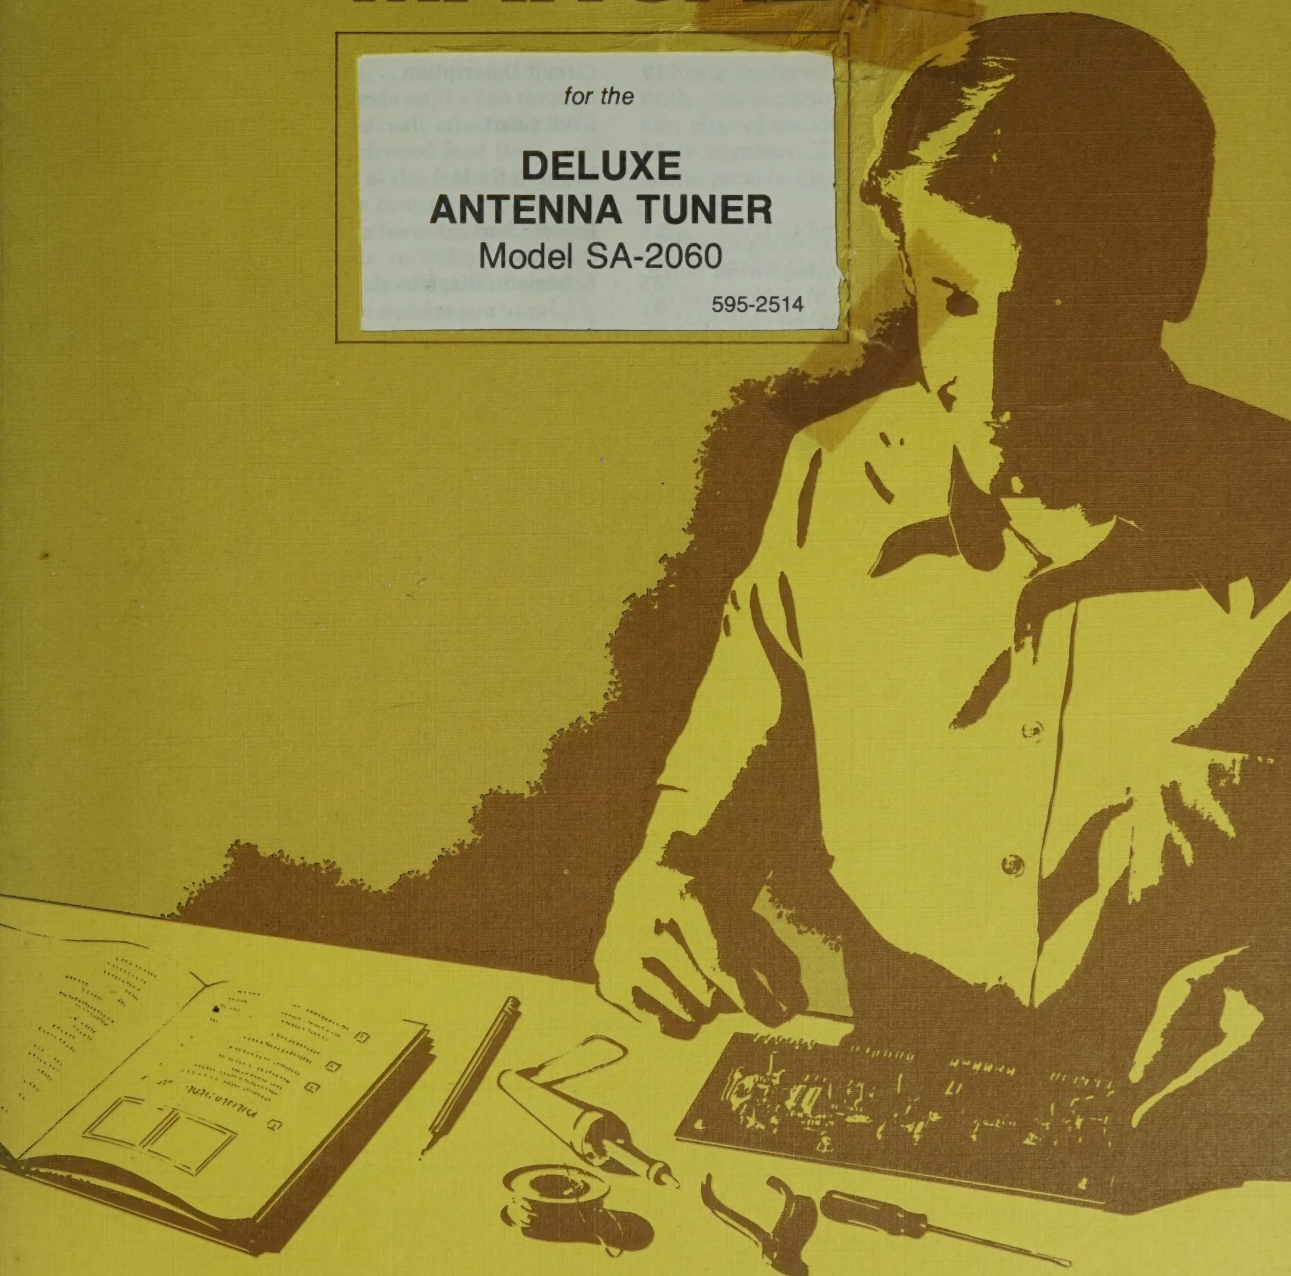

HEATH COMPANY • BENTON HARBOR, MICHIGAN

HEATH COMPANY PHONE DIRECTORY

The following telephone numbers are direct lines to the departments listed:

Kit orders and delivery information (616) 982-3411
Credit (616) 982-3561
Replacement Parts (616) 982-3571

Technical Assistance Phone Numbers

8:00 A.M. to 12 P.M. and 1:00 P.M. to 4:30 P.M., EST, Weekdays Only
R / C, Audio, and Electronic Organs (616) 982-3310
Amateur Radio (616) 982-3296
Test Equipment, Weather Instruments and
Home Clocks (616) 982-3315
Television (616) 982-3307
Aircraft, Marine, Security, Scanners, Automotive,
Appliances and General Products (616) 982-3496
Computer Hardware (616) 982-3309
Computer Software (616) 982-3860
Heath Craft Wood Works (616) 982-3423

YOUR HEATHKIT 90-DAY LIMITED WARRANTY

Consumer Protection Plan for Heathkit Consumer Products

Welcome to the Heath family. We believe you will enjoy assembling your kit and will be pleased with its performance. Please read this Consumer Protection Plan carefully. It is a "LIMITED WARRANTY" as defined in the U.S. Consumer Product Warranty and Federal Trade Commission Improvement Act. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Heath's Responsibility

PARTS — Replacements for factory defective parts will be supplied free for 90 days from date of purchase. Replacement parts are warranted for the remaining portion of the original warranty period. You can obtain warranty parts direct from Heath Company by writing or telephoning us at (616) 982-3571. And we will pay shipping charges to get those parts to you . . . anywhere in the world.

SERVICE LABOR — For a period of 90 days from the date of purchase, any malfunction caused by defective parts or error in design will be corrected at no charge to you. You must deliver the unit at your expense to the Heath factory, any Heathkit Electronic Center (units of Veritechnology Electronics Corporation), or any of our authorized overseas distributors.

TECHNICAL CONSULTATION — You will receive free consultation on any problem you might encounter in the assembly or use of your Heathkit product. Just drop us a line or give us a call. Sorry, we cannot accept collect calls.

NOT COVERED — The correction of assembly errors, adjustments, calibration, and damage due to misuse, abuse, or negligence are not covered by the warranty. Use of corrosive solder and/or the unauthorized modification of the product or of any furnished component will void this warranty in its entirety. This warranty does not include reimbursement for inconvenience, loss of use, customer assembly, set-up time, or unauthorized service.

This warranty covers only Heath products and is not extended to other equipment or components that a customer uses in conjunction with our products.

SUCH REPAIR AND REPLACEMENT SHALL BE THE SOLE REMEDY OF THE CUSTOMER AND THERE SHALL BE NO LIABILITY ON THE PART OF HEATH FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO ANY LOSS OF BUSINESS OR PROFITS, WHETHER OR NOT FORSEEABLE.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Owner's Responsibility

EFFECTIVE WARRANTY DATE — Warranty begins on the date of first consumer purchase. You must supply a copy of your proof of purchase when you request warranty service or parts.

ASSEMBLY — Before seeking warranty service, you should complete the assembly by carefully following the manual instructions. Heathkit service agencies cannot complete assembly and adjustments that are customer's responsibility.

ACCESSORY EQUIPMENT — Performance malfunctions involving other non-Heath accessory equipment, (antennas, audio components, computer peripherals and software, etc.) are not covered by this warranty and are the owner's responsibility.

SHIPPING UNITS — Follow the packing instructions published in the assembly manuals. Damage due to inadequate packing cannot be repaired under warranty.

If you are not satisfied with our service (warranty or otherwise) or our products, write directly to our Director of Customer Service, Heath Company, Benton Harbor MI 49022. He will make certain your problems receive immediate, personal attention.

Heathkit® Manual

for the

DELUXE ANTENNA TUNER

Model SA-2060

595-2514

HEATH COMPANY
BENTON HARBOR, MICHIGAN 49022

Copyright © 1981
Heath Company
All Rights Reserved
Printed in the United States of America

TABLE OF CONTENTS

Introduction	3	Typical Operating Characteristics	54
Assembly Notes	4	In Case of Difficulty	54
Parts List	7	Specifications	55
Step-By-Step Assembly	10	Circuit Description	56
Rear Panel Assembly	10	SWR Chart	57
Switch Prewiring	15	Logging Scale	58
Front Panel Assembly	15	Preset Chart	59
Front Panel Wiring	22	Schematic Diagram .. Illustration Booklet, Page 15	
Transmitter and Antenna		Warranty	Inside Front Cover
Matching Capacitors (C1 and C2)	26	Customer Service	Inside Rear Cover
Roller Inductor (L1)	32		
Balun Coil (T1)	35		
Chassis Final Assembly	41		
Final Assembly	49		
Applications and Installation	50		
Operation	51		

INTRODUCTION

Your Deluxe Antenna Tuner Model SA-2060 has all of the features of the popular Heathkit Model SA-2040 Antenna Tuner combined with most all the features of the Heathkit Model HM-2140 Dual Wattmeter. In addition, it includes the 160-Meter amateur band.

The Tuner is designed to operate on the 160 through 10-Meter amateur bands, and will effectively tune and match balanced or unbalanced feed lines, and single-wire and ladder lines at the full legal power limit of your station. With its continuously-variable inductor, you are assured precise antenna-matching all the way from 1.8 to 30 MHz, including the MARS frequencies, and all the newly-allocated bands. A convenient front panel counter enables you to quickly set the inductor to previously calibrated frequencies.

The silver-plated straps and roller contact assembly minimize RF loss at high frequencies. The large feed-through insulators withstand high-voltage RF.

The dual wattmeter feature enables you to read both forward and reflected average power, in two ranges, up to the full legal limit of your station.

The wattmeter section of your Deluxe Antenna Tuner installs directly into your transmission line to measure the power on all frequencies between 1.8 and 30 MHz. It measures 200/2000 watts in the forward direction and up to 50/500 watts reflected. Dual meters indicate the forward and reflected power separately with $\pm 5\%$ accuracy for precise measurements. A factory aligned and calibrated sensor head insures complete accuracy. SWR indications on the reflected meter provide direct readings from 1:1 to 3:1.



With a single switch you may select a dummy load, or either of two permanently-connected antennas. You no longer need to connect and disconnect feed lines to load your transmitter into the dummy load.

With its factory-calibrated components, easy-to-read dual watt-meters, and with all its controls on the front panel, your new Deluxe Antenna Tuner will soon become an integral, indispensable component of your system.

ASSEMBLY NOTES


TOOLS

You will need these tools to assemble your kit.

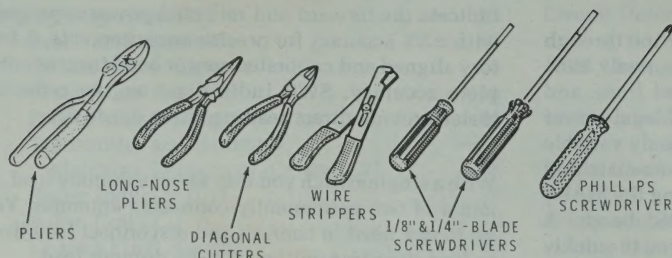

HEATHKIT
SOLDERING
IRON

OR




PENCIL
SOLDERING IRON
(25 TO 40 WATTS)


OTHER HELPFUL TOOLS




NUT STARTER
(MAY BE SUPPLIED
WITH KIT)



DESOLDERING
BULB*



DESOLDERING
BRAID*



NUT
DRIVERS

*TO REMOVE SOLDER FROM CIRCUIT CONNECTIONS.

ASSEMBLY

- Follow the instructions carefully. Read the entire step before you perform each operation.
- The illustrations in the Manual are called Pictorials and Details. Pictorials show the overall operation for a group of assembly steps; Details generally illustrate a single step. When you are directed to refer to a certain Pictorial "for the following steps," continue using that Pictorial until you are referred to another Pictorial for another group of steps.
- Most kits use a separate "Illustration Booklet" that contains illustrations (Pictorials, Details, etc.) that are too large for the Assembly Manual. Keep the "Illustration Booklet" with the Assembly Manual. The illustrations in it are arranged in Pictorial number sequence.
- Position all parts as shown in the Pictorials.
- Solder a part or a group of parts only when you are instructed to do so.

6. Each circuit part in an electronic kit has its own component number (R2, C4, etc.). Use these numbers when you want to identify the same part in the various sections of the Manual. These numbers, which are especially useful if a part has to be replaced, appear:

- In the Parts List,
- At the beginning of each step where a component is installed,
- In some illustrations,
- In the Schematic,
- In the section at the rear of the Manual.

7. When you are instructed to cut something to a particular length, use the scales (rulers) provided at the bottom of the Manual pages.

SAFETY WARNING: Avoid eye injury when you cut off excessive lead lengths. Hold the leads so they cannot fly toward your eyes.

SOLDERING

Soldering is one of the most important operations you will perform while assembling your kit. A good solder connection will form an electrical connection between two parts, such as a component lead and a circuit board foil. A bad solder connection could prevent an otherwise well-assembled kit from operating properly.


It is easy to make a good solder connection if you follow a few simple rules:

1. Use the right type of soldering iron. A 25 to 40-watt pencil soldering iron with a 1/8" or 3/16" chisel or pyramid tip works best.
2. Keep the soldering iron tip clean. Wipe it often on a wet sponge or cloth; then apply solder to the tip to give the entire tip a wet look. This process is called tinning, and it will protect the tip and enable you to make good connections. When solder tends to "ball" or does not stick to the tip, the tip needs to be cleaned and retinned.

NOTE: Always use rosin core, radio-type solder (60:40 or 50:50 tin-lead content) for all of the soldering in this kit. This is the type we have supplied with the parts. The Warranty will be void and we will not service any kit in which acid core solder or paste has been used.

PARTS

Resistors are identified in Parts Lists and steps by their resistance value in Ω (ohms), $k\Omega$ (kilohms), or $M\Omega$ (megohms). They are usually identified by a color code and four or five color bands, where each color represents a number. These colors (except for the last band, which indicates a resistor's "tolerance") will be given in the steps in their proper order. Therefore, the following color code is given for information only. NOTE: Occasionally, a "precision" or "power" resistor may have the value stamped on it.

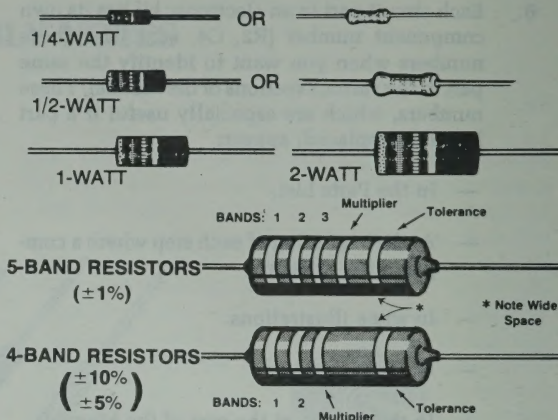

Band 1 1st Digit		Band 2 2nd Digit		Band 3 (if used) 3rd Digit		Multiplier		Resistance Tolerance	
Color	Digit	Color	Digit	Color	Digit	Color	Multiplier	Color	Tolerance
Black	0	Black	0	Black	0	Black	1	Silver	± 10%
Brown	1	Brown	1	Brown	1	Brown	10	Gold	± 5%
Red	2	Red	2	Red	2	Red	100	Brown	± 1%
Orange	3	Orange	3	Orange	3	Orange	1,000		
Yellow	4	Yellow	4	Yellow	4	Yellow	10,000		
Green	5	Green	5	Green	5	Green	100,000		
Blue	6	Blue	6	Blue	6	Blue	1,000,000		
Violet	7	Violet	7	Violet	7	Silver	0.01		
Gray	8	Gray	8	Gray	8	Gold	0.1		
White	9	White	9	White	9				


Capacitors will be called out by their capacitance value in μF (microfarads) or pF (picofarads) and type: ceramic, Mylar*, electrolytic, etc. Some capacitors may have their value printed in the following manner:

EXAMPLES:

$$151K = 15 \times 10 = 150 \text{ pF}$$

$$759 = 75 \times 0.1 = 7.5 \text{ pF}$$

NOTE: The letter "R" may be used at times to signify a decimal point: as in: 2R2 = 2.2 (pF or μF).

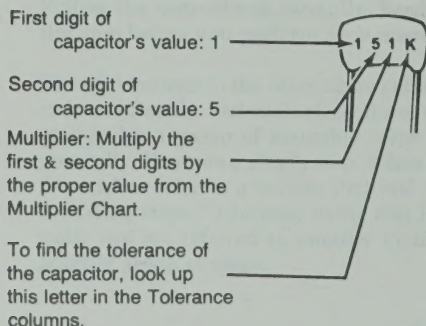

MULTIPLIER		TOLERANCE OF CAPACITOR		
FOR THE NUMBER:	MULTIPLY BY:	10 pF OR LESS	LETTER	OVER 10 pF
0	1	±0.1 pF	B	
1	10	±0.25 pF	C	
2	100	±0.5 pF	D	
3	1000	±1.0 pF	F	±1%
4	10,000	±2.0 pF	G	±2%
5	100,000		H	±3%
			J	±5%
8	0.01		K	±10%
9	0.1		M	±20%

PARTS LIST

Unpack the kit and check each part against the following list. Any part that is packed in an individual envelope with the part number on it should be placed back in the envelope after you identify it until all the parts are accounted for.

The key numbers correspond to the numbers on the "Parts Pictorial" in the separate "Illustration Booklet" on Page 1.

KEY No.	HEATH Part No.	QTY.	DESCRIPTION
---------	----------------	------	-------------

HARDWARE

NOTE: Hardware packets are marked to show the size of the hardware they contain (HDW #4 or HDW #6, etc.). You may have to open more than one packet to locate all of the hardware of one size (#6, for example).

#2 and #4 Hardware

A1	250-352	2	2-56 × 11/16" screw
A2	250-156	4	4-40 × 1/8" setscrew
A3	250-213	2	4-40 × 5/16" screw
A4	252-51	2	2-56 nut
A5	254-26	2	#2 lockwasher
A6	254-9	2	#4 lockwasher
A7	259-9	1	#4 solder lug

#6 Hardware

B1	250-230	8	6-32 × 3/16" setscrew
B2	250-89	10	6-32 × 3/8" screw
B3	250-270	8	6-32 × 3/8" black screw
B4	250-434	6	6-32 × 3/8" flat head screw
B5	250-475	4	#6 × 3/8" hex head, sheet metal screw
B6	250-1264	2	6-32 × 3/8" hex head screw
B7	250-26	4	6-32 × 5/8" screw
B8	250-134	1	6-32 × 3/4" brass screw
B9	250-79	2	6-32 × 1-1/4" screw
B10	250-1290	1	6-32 × 2" brass screw
B11	252-3	22	6-32 nut
B12	253-127	2	#6 flat steel washer
B13	253-714	28	#6 brass washer
B14	254-1	24	#6 lockwasher

To order a replacement part: Always include the PART NUMBER. Use the Parts Order Form furnished with the kit. If one is not available, see "Replacement Parts" inside the rear cover of the Manual. Your Warranty is located inside the front cover. For prices, refer to the separate "Heath Parts Price List."

KEY No.	HEATH Part No.	QTY.	DESCRIPTION
---------	----------------	------	-------------

#8 Hardware


C1	250-16	8	8-32 × 3/16" setscrew
C2	250-585	16	8-32 × 1/2" screw
C3	250-329	17	8-32 × 5/8" screw
C4	252-4	1	8-32 nut
C5	252-180	1	8-32 wing nut
C6	253-9	10	#8 flat steel washer
C7	253-715	48	#8 flat fiber washer
C8	254-2	8	#8 lockwasher
C9	259-2	2	#8 solder lug

#10 Hardware

D1	252-163	3	10-32 wing nut
D2	252-199	26	10-32 brass nut
D3	253-19	6	#10 flat steel washer
D4	253-716	16	#10 flat fiber washer
D5	254-3	3	#10 lockwasher
D6	259-26	4	#10 solder lug

Other Hardware

E1	250-1235	2	1/4-32 × 1/4" setscrew
E2	252-39	2	1/4-32 nut
E3	252-701	11	Brass control nut
E4	253-10	5	Control flat washer
E5	253-36	1	Brass spring washer
E6	254-5	5	Control lockwasher
E7	258-704	2	Dished spring
E8	258-705	2	Forked spring
E9	258-734	2	Contact spring
E10	259-10	1	Control solder lug
E11	455-13	3	Short shaft bushing
E12	455-26	2	Long shaft bushing
E13	455-642	1	Shaft collar



KEY No.	HEATH Part No.	QTY.	DESCRIPTION
---------	----------------	------	-------------

CIRCUIT Comp. No.

SPACERS

F1	255-3	2	3/8" spacer
F2	255-59	4	Tapered spacer
F3	255-719	50	Large 17/64" spacer
F4	255-720	4	Large 3/16" spacer
F5	255-721	100	Small 17/64" spacer
F6	255-722	4	Small 3/16" spacer
F7	255-728	8	8-32 × 8-5/16" spacer

SHAFTS-COULPLERS

G1	266-896	4	10-32 × 9-7/8" threaded brass rod
G2	266-1047	1	Tension rod
G3	453-265	1	2-3/4" metal extension shaft
G4	453-277	2	2-3/8" fiberglass extension shaft
G5	453-278	2	9-7/8" hex shaft
G6	453-324	1	12-1/2" fiber shaft
G7	456-7	4	Shaft coupler
G8	456-44	1	Stepped coupler

METAL PARTS

H1	90-1257-1	1	Cabinet top
H2	200-1388-1	1	Chassis
H3	204-2207	6	Capacitor mounting bracket
H4	204-2509	4	Meter bracket
H5	204-2515	1	Counter bracket
H6	205-1679	2	Capacitor front plate
H7	205-1680	2	Capacitor rear plate
H8	205-1681	50	Stator plate
H9	205-1682	52	Rotor plate
H10	205-1727	1	Shorting bar
H11	206-406	1	Spiral shield
H12	207-8	3	Cable clamp
H13	212-57	1	4-1/4" strap
H14	212-59	3	4-19/32" strap
H15	212-60	1	6" strap

ELECTRONIC PARTS

J1	6-1652-12	1	16.5 kΩ (brn-blu-grn-red), 1/4-watt precision resistor	R2
J1	6-4022-12	1	40.2 kΩ (yel-blk-red-red), 1/4-watt precision resistor	R1
J2	21-140	2	.001 μF ceramic capacitor	C8, C9
J2	21-176	4	.01 μF ceramic capacitor	C3, C4, C5, C6

KEY No.	HEATH Part No.	QTY.	DESCRIPTION
---------	----------------	------	-------------

CIRCUIT Comp. No.

Electronic Parts (Cont'd.)

J3	10-14	1	250 kΩ control	R3
J4	40-2030	1	Roller inductor	L1
J5	64-884	1	Pushbutton switch assembly	SW1, SW2, SW3
J6	100-1780	1	Remote sensor assembly*	
J7	407-757	1	FWD meter	M2
J7	407-758	1	REF meter	M1

MISCELLANEOUS


K1	71-2	2	Small ceramic feedthrough insulator (disassembled)	
K2	71-11	3	Large ceramic feedthrough insulator (disassembled)	
K3	73-43	1	3/8" grommet	
	73-147	1	3" foam tape	
	74-31	1	Glass-cloth tape (roll)	
K4	205-1741	2	Inductor end plate	
K5	261-9	4	Round foot	
K6	266-894	9	Ceramic insulator plate (1 extra)	
K7	266-898	2	Steel ball	
K8	266-1048	1	Roller contact	
K9	266-1110	1	Switch detent	
	344-147	11'	Teflon** insulated wire	
	347-55	9'	8-conductor cable	
K10	352-14	1	Grease pod	
K11	431-62	1	Terminal strip	
K12	446-723	1	Window	
K13	451-61	2	Nylon gear	
K14	462-933	2	1-1/4" knob	
K15	462-934	3	2" knob	
K16	465-6	1	Counter	
K17	475-19	2	Toroidal core	T1
K18	490-5	1	Nut starter	
K19	490-14	1	Large allen wrench	
K20	490-23	1	Small allen wrench	
K21	490-168	1	Open end wrench	
			Solder	

PRINTED MATERIAL

L1	390-147	1	"Danger" label
L2	390-1780	1	Front panel label
L3		1	Blue and white label
	597-260	1	Parts Order Form
		1	Assembly Manual (see title page for part number.)

*See separate "Remote Sensor Assembly (#100-1780)"

**Registered Trademark, DuPont Corp.



Remote Sensor Assembly (#100-1780)

IMPORTANT: The Remote Sensor Assembly contains the following parts. This Assembly has been factory tested and aligned. **Do NOT attempt to adjust any components in the Remote Sensor Assembly;** to do so may void the Warranty.

HEATH Part No.	QTY.	DESCRIPTION	CIRCUIT Comp. No.
RESISTORS, 1/4-WATT, 5%			
6-470-12	2	47 Ω (yel-viol-blk)	R101, R102
6-332-12	1	3300 (org-org-red)	R103
6-223-12	1	22 k Ω (red-red-org)	X101
6-104-12	1	100 k Ω (brn-blk-yel)	X102

CONTROLS

10-312	1	10 k Ω	R104
10-390	1	20 k Ω	R107
10-941	2	100 k Ω	R105, R106

CAPACITORS — COIL

20-103	2	150 pF mica capacitor	C101, C102
20-172	2	.001 μ F mica capacitor	C103, C104
31-8	1	1-8 pF trimmer capacitor	C105
40-1970	1	29.5 μ H toroid coil	L101

HARDWARE

250-480	2	4-40 \times 15/16" screw	
252-15	2	4-40 nut	

HEATH Part No.	QTY.	DESCRIPTION	CIRCUIT Comp. No.
Hardware (Cont'd.)			
254-9	2	#4 lockwasher	
253-43	2	#5 flat washer	
250-324	2	6-32 \times 3/16" screw	
253-1	1	#6 fiber washer	
254-1	6	#6 lockwasher	
255-705	2	Spacer	
259-6	2	#6 solder lug	

MISCELLANEOUS


56-20	2	1N295A diode	D101, D102
63-1374	1	Rotary switch	SW101
85-2038-1	1	Printed circuit board	
204-9	2	Angle bracket	
212-61	2	Switch bus	
214-230-1	1	Sensor housing	
340-3	2"	16-gauge bare wire	
340-8	2"	22-gauge bare wire	
346-21	1"	Sleeving	
347-39	3'	5-conductor cable	
436-55	4	Coaxial jack	J1, J2, J6, J7
475-10	2	Ferrite bead	

STEP-BY-STEP ASSEMBLY

REAR PANEL ASSEMBLY


Refer to Pictorial 1-1 (Illustration Booklet, Page 3) for the following steps.

- (✓) Position the chassis on your work area as shown in the Pictorial.
- (✓) Refer to Detail 1-1A and install a 3/8" grommet in hole A from the outside of the panel as shown.

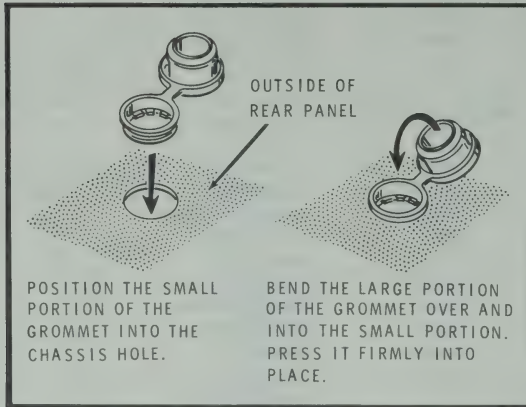

Detail 1-1A

- (✓) Locate the remote sensor assembly and position it as shown in Detail 1-1B. CAUTION: DO NOT ATTEMPT TO ADJUST OR IN ANY WAY TAMPER WITH THE REMOTE SENSOR COMPONENTS, EXCEPT AS DIRECTED IN THE FOLLOWING STEPS. This unit has been factory calibrated; any attempt to readjust its controls may void the Warranty.
- (✓) Locate the two packets containing the small ceramic feedthrough insulators (#71-2) and other parts. Open one of these packets and remove all its contents. Use these parts in the following steps.

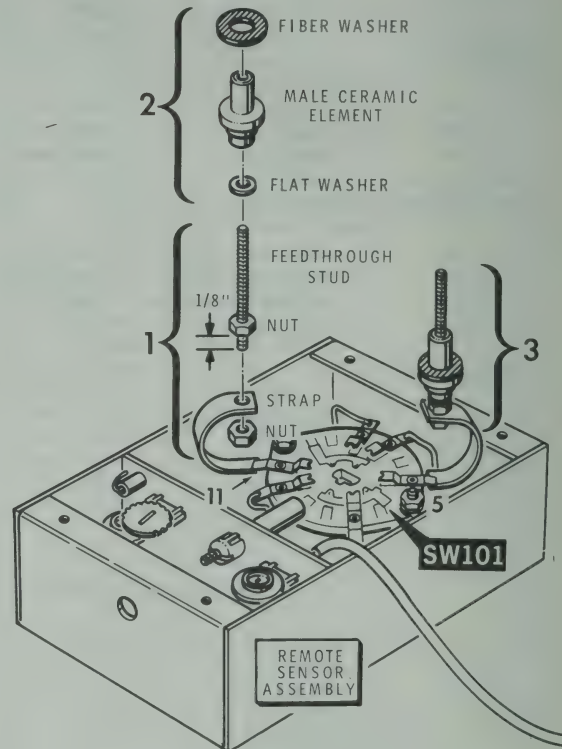

Detail 1-1B

Heathkit®


Refer to Detail 1-1B for the next three steps.

- (✓) 1. Place a nut on one end of a feedthrough stud. Turn the nut until $1/8"$ of the thread is beyond the nut. Push this end of the stud through the hole in the end of the strap coming from switch SW101 lug 11. Turn another nut onto the end of the stud to secure the strap; then grasp the inner nut with pliers as you tighten the outer nut with the wrench provided.
- (✓) 2. Place a flat washer onto the end of the stud, followed by a male ceramic element, and a fiber washer as shown.
- (✓) 3. In exactly the same manner, install the other feedthrough stud on the end of the strap coming from switch SW101 lug 5. Place a flat washer, the male ceramic element, and a fiber washer on the stud.

- (✓) Refer to Detail 1-1C and position one of the studs straight up, near the lower corner of the remote sensor assembly as shown. You will have to bend the strap slightly to do this. Position the other stud straight up, directly across the switch, 2" from the other stud.

- (✓) Before you mount the remote sensor, refer to the inset drawing on Detail 1-1C and make certain the rotor index is at the "bypass" setting **exactly** as shown. Then, do not move the rotor from this position during any later steps.

- (✓) Place the remote sensor assembly close to the rear of the chassis. Then push the end of the sensor cable into grommet A and pull the cable through to take up all the slack.

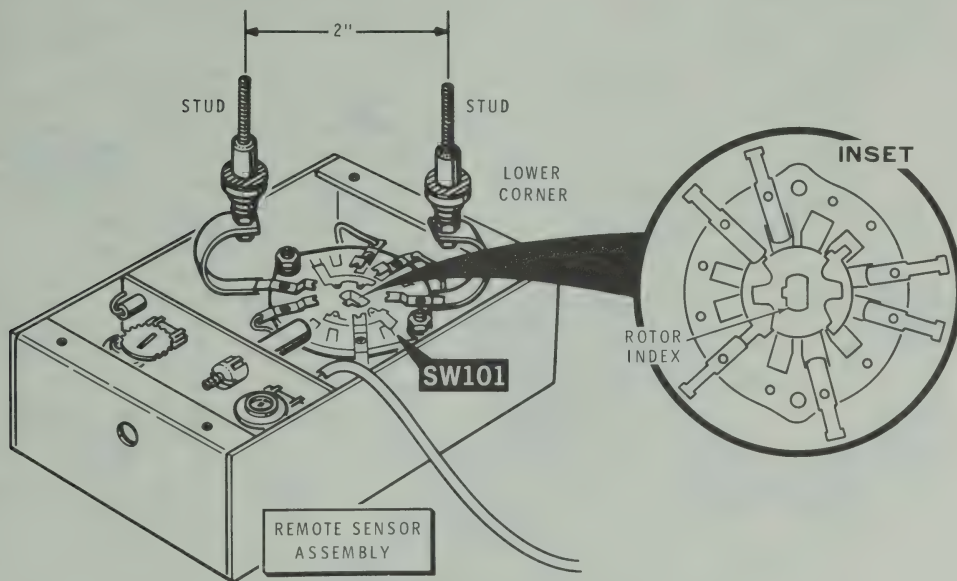

Detail 1-1C



NOTE: In the following step, as you position the remote sensor assembly onto the rear panel, keep all the slack out of the cable; pull it through grommet A to avoid kinking it on the inside of the remote sensor assembly.

- (↓) Mount the remote sensor onto the rear panel so the two feedthrough studs are positioned into holes B and C. Loosely secure the remote sensor housing to the rear panel with three #6 × 3/8" hex head, sheet metal screws at D, E, and F.


- (↓) Refer to Detail 1-1D and work the center portions of the two feedthrough insulators into holes B and C. Then place a fiber washer, a female ceramic element, a flat washer and a nut onto each feedthrough stud. Tighten each nut finger tight.

- (✓) Bend the rounded part of a cable clamp so it is just a little larger than the diameter of the remote cable. Place the clamp onto the cable; then secure the clamp to the rear panel and the remote sensor at G with a #6 × 3/8" sheet metal screw. Position the cable and the clamp as shown in the Pictorial.


- (↓) Tighten the mounting screws at D, E, F, and G.

NOTE: In the following step, do not overtighten the feedthrough nut and break the insulator.

- (✓) Turn the nut on each feedthrough insulator at B and C until it is just snug. Then place the remaining nut on the end of each feedthrough stud so it will not become misplaced.

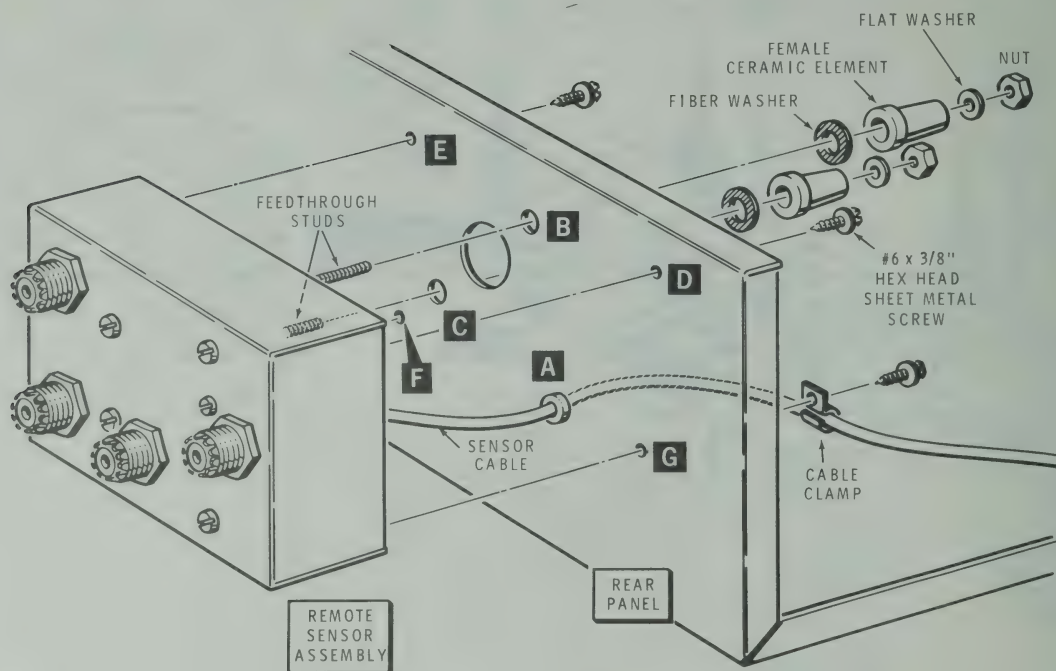

Detail 1-1D

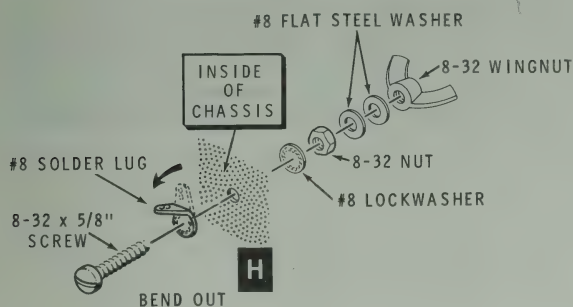


Detail 1-2A

- (✓) 1. Mount a large ceramic insulator (#71-11) as shown. Before you tighten the hardware, make sure about 1/4" of the threaded stud extends from the nut on the inside of the chassis. Do **not** overtighten the hardware.
- (✓) 2. Slide a #10 lockwasher onto the stud on the outside of the chassis. Then turn another nut onto the stud and tighten it against the lockwasher.
- (✓) 3. Temporarily turn the remaining nut onto the stud on the inside of the chassis.
- (✓) J4 and J5: In the same manner, mount large ceramic feedthrough insulators at J4 and J5.

Refer to Pictorial 1-2 (Illustration Booklet, Page 3) for the following steps.

- (✓) Form a #8 solder lug as shown in Detail 1-2A. Then mount the solder lug at H on the chassis rear panel as shown in the Detail. Use 8-32 x 5/8" hardware, two #8 steel flat washers, and an 8-32 wingnut. Position the solder lug as shown in the Pictorial.


J3: Refer to Detail 1-2B and mount a large ceramic feedthrough insulator at J3 on the chassis rear panel in the following three steps. NOTE: In addition to the parts supplied with the insulator, you will need a #10 lockwasher.

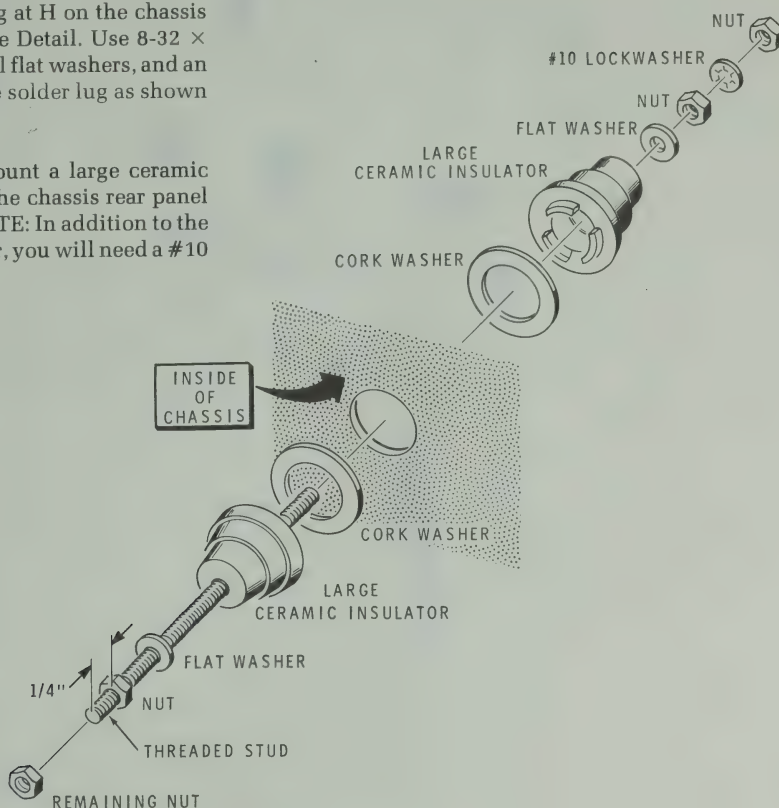


Detail 1-2B

(✓) Refer to Detail 1-2C and slide two #10 steel flat washers onto the stud on the outside of the chassis at J3. Then turn a 10-32 wingnut onto the stud against the flat washers.

(✓) Refer again to Detail 1-2C and mount the shorting bar onto the studs of ceramic feedthrough insulators J4 and J5. Be sure the shorting bar is between the #10 flat steel washers. Also be sure the open side of the shorting bar is on the stud of J5 as shown.

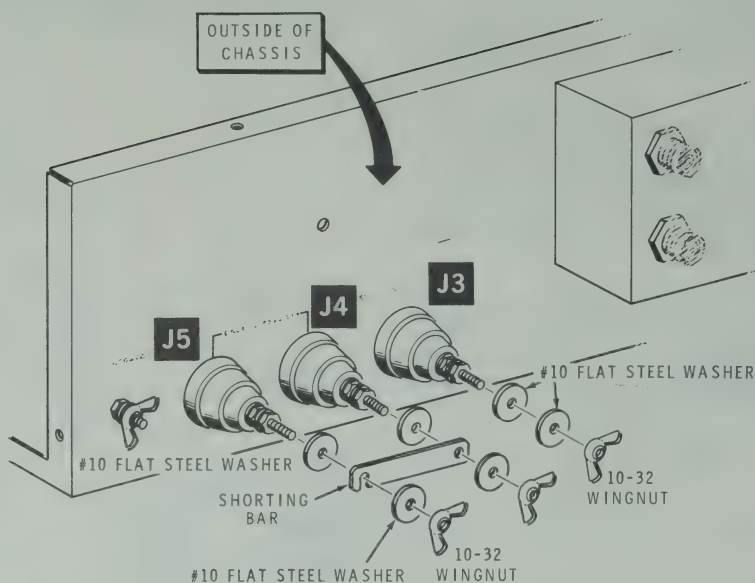

Detail 1-2C

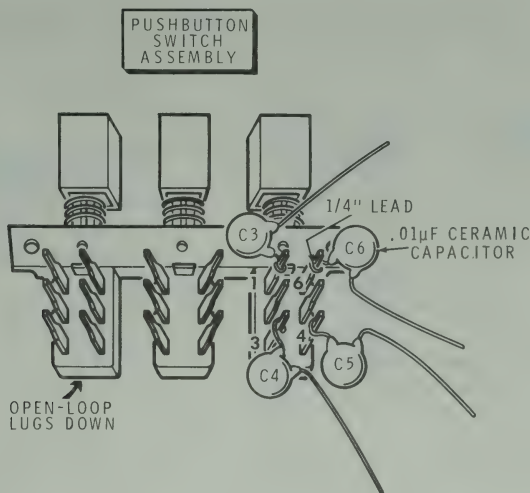

PICTORIAL 2-1

SWITCH PREWIRING

Refer to Pictorial 2-1 for the following steps.

- (✓) Position the pushbutton switch assembly, open-loop lugs down, as shown.
- (✓) On each of the four .01 μ F ceramic capacitors, cut one lead to 1/4". Form a loop in the end of each 1/4" lead.

NOTE: In the following steps, you will connect the four prepared .01 μ F capacitors to SW3 lugs. These are the straight lugs, without loops, on the top of the switch (as shown in the Pictorial).

- (✓) C6: .01 μ F ceramic capacitor to SW3 lug 6.
- (✓) C5: .01 μ F ceramic capacitor to SW3 lug 4.
- (✓) C3: .01 μ F ceramic capacitor to SW3 lug 1.
- (✓) C4: .01 μ F ceramic capacitor to SW3 lug 3.

NOTE: The free capacitor leads will be connected later.

✓ SOLDER EACH CAPACITOR LEAD TO THE LUG AS YOU INSTALL IT


FRONT PANEL ASSEMBLY

Refer to Pictorial 2-2 (Illustration Booklet, Page 4) for the following steps.


- () Position the chassis as shown.

Refer to Detail 2-2A and mount the pushbutton switch assembly on the front panel at SW1, SW2, and SW3 in the following seven steps.

- (✓) 1. Position the switch assembly into the front panel so the open loops are toward the left side of the chassis.
- (✓) 2. Bend the indicated lug of the terminal strip as shown.
- (✓) 3. Secure the top of the switch assembly at J with a 2-56 × 11/16" screw, a 3/8" spacer, a #2 lockwasher, the terminal strip, a #2 lockwasher, and a 2-56 nut. Position the bent terminal strip lug as close as possible to the top inner switch lug as shown in the inset drawing. NOTE: Pull outward on the terminal strip before you tighten the mounting screw.
- (✓) 4. Secure the bottom of the switch assembly at K with a 2-56 × 11/16" screw, a 3/8" spacer, a #4 solder lug, and a 2-56 nut. Position the solder lug straight down as shown in the Pictorial.
- (✓) 5. Push each pushbutton in and out to make sure none of them bind in the front panel. If necessary, temporarily loosen the switch mounting hardware and move the switch assembly as necessary. Then retighten the hardware.
- (✓) 6. Cut the leads of a 16.5 kΩ (brn-blu-grn-red) resistor to 3/8". Bend both leads to form a 90-degree angle to the body of the resistor; then form a small hook in each lead end.
- (✓) 7. R2: Connect the prepared 16.5 kΩ resistor between switch SW2 lugs 1 (S-1) and 6 (S-1). NOTE: Be sure the resistor leads touch only the designated switch lugs. Cut off any excess lead ends.

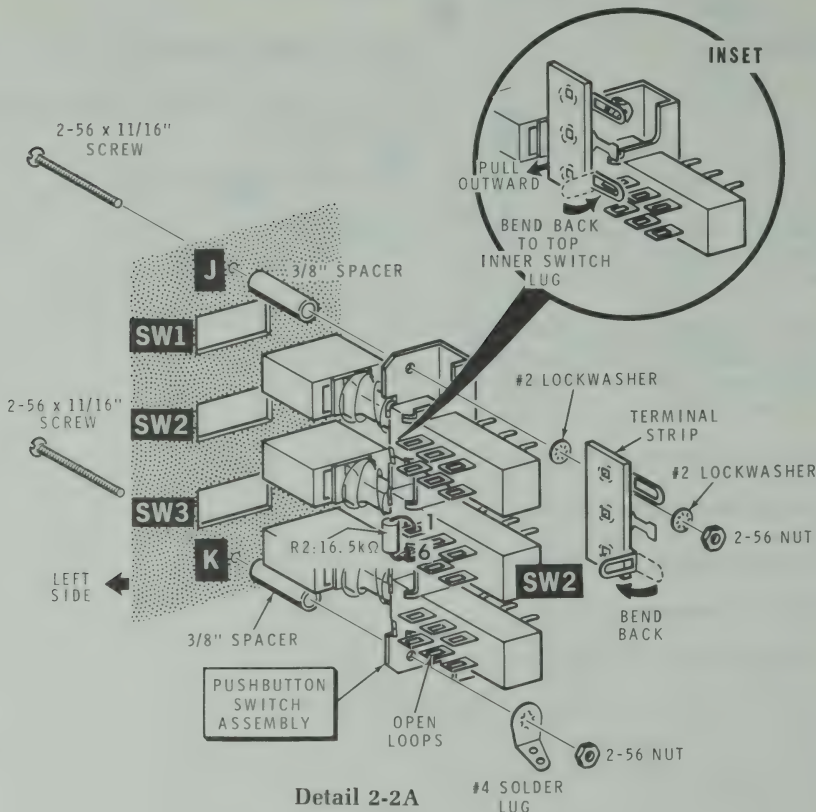

Detail 2-2A

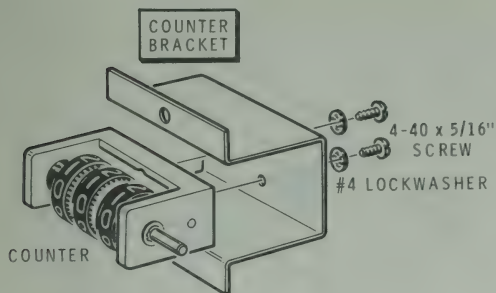


Detail 2-2B

- (✓) Refer to Detail 2-2B and mount the counter to the counter bracket. Use two 4-40 × 5/16" screws and two #4 lockwashers. Be sure the edges of the counter are parallel to the edges of the bracket before you tighten the screws.


NOTE: When hardware is called for in a step, only the screw size will be given. For instance, if 6-32 × 1/4" hardware is called for, use a 6-32 × 1/4" screw, one or more #6 lockwashers, and a 6-32 nut. The Pictorial or Detail will show the number of lockwashers to use. Use the plastic nut starter to pick up and start 6-32 nuts on screws.

- (✓) Locate the small window and, if necessary, remove the thin protective film from either or both sides of the window.
- (✓) Refer to Detail 2-2C and mount the counter assembly and the window to the front of the chassis at W and Z. Use 6-32 × 3/8" flat head hardware as shown.
- (✓) Refer to Detail 2-2D and use the small allen wrench to start a 4-40 × 1/8" setscrew in the stepped coupler.

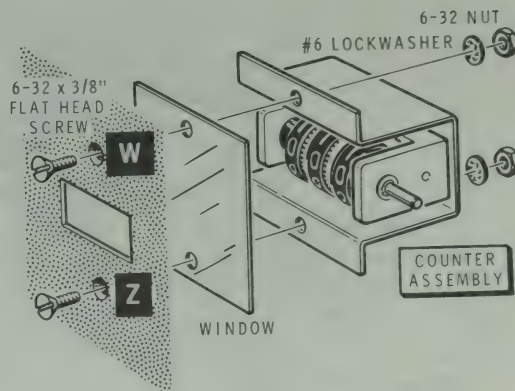


Detail 2-2C

- (✓) Similarly, start 4-40 × 1/8" setscrews in the two nylon gears.
- (✓) Start a 4-40 × 1/8" setscrew into the shaft collar.
- (✓) Use the large allen wrench to start two 6-32 × 1/8" setscrews into each of the four shaft couplers.
- (✓) Set one of the nylon gears, the shaft collar, and the four shaft couplers aside until they are called for in a step.

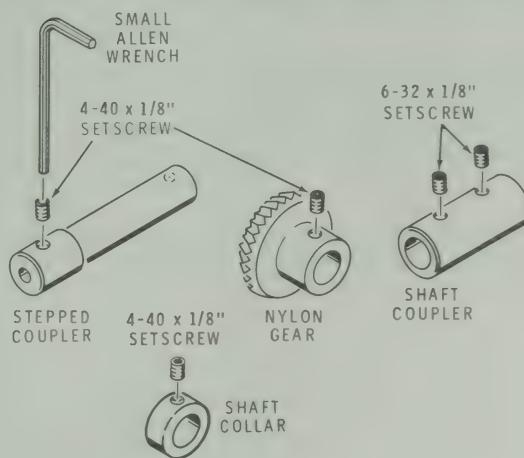


Detail 2-2D

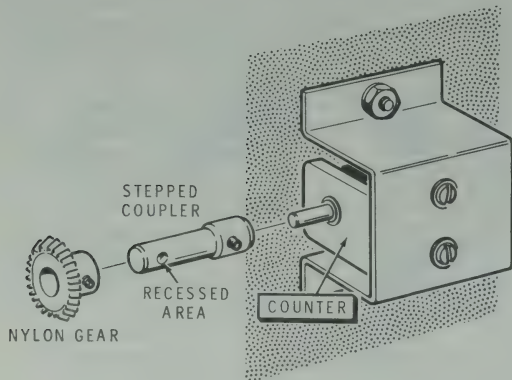

Detail 2-2E


CAUTION: You can very easily strip the threads in the screw holes in the nylon gears when you mount them on their shafts, as in the next step. Therefore, do **not** overtighten the setscrews when you secure the gears on their shafts.

- (✓) Refer to Detail 2-2E and mount a nylon gear onto the stepped coupler as shown. Be sure the setscrew enters the recessed area on the coupler. Then carefully tighten the setscrew.

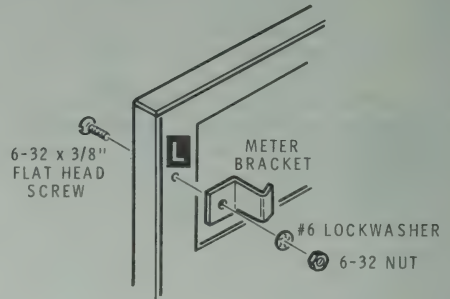

Detail 2-2F

- (✓) Turn the shaft of the counter until you can read 000 through the front panel window. Then temporarily mount the stepped coupler onto the shaft of the counter. Push the stepped coupler all the way onto the shaft of the counter before you tighten the setscrew. Tighten the setscrew only enough to hold the coupler in place.
- (✓) Refer to Detail 2-2F and mount a meter bracket on the inside of the front panel at L with 6-32 x 3/8" flat head hardware. Just start the nut onto the end of the screw; it will be tightened later.
- (✓) In the same manner, loosely install meter brackets at N, P, and R.

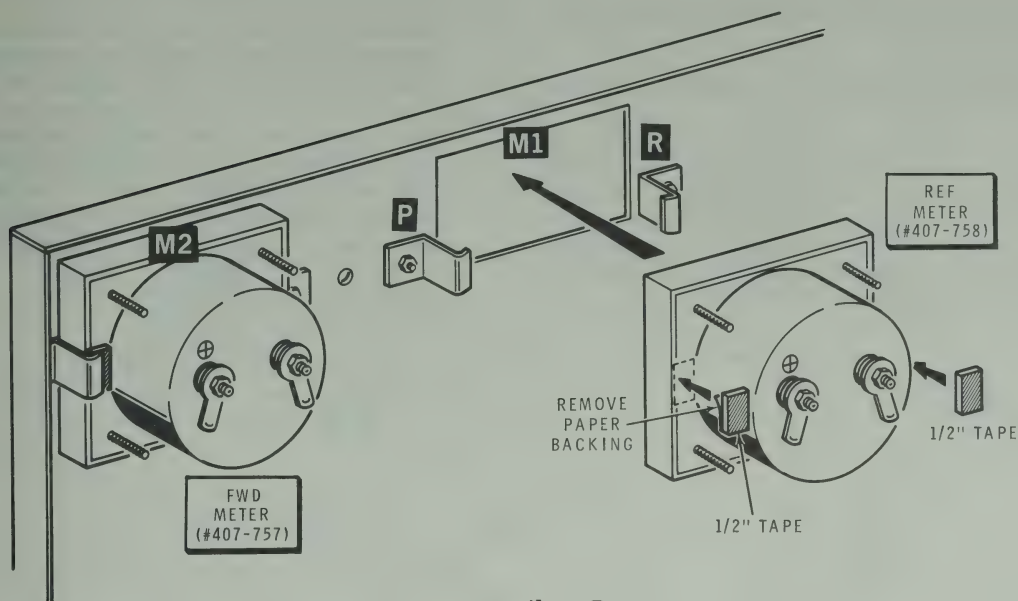

Detail 2-2G

Refer to Detail 2-2G for the next seven steps.

NOTE: In the following steps, be sure to place the meters on a soft cloth whenever possible to avoid scratching the meter faces.

- (✓) 1. Remove both meters from their shipping cartons. Discard the meter mounting hardware. Remove and discard the shorting wires from the meter terminals.
- (✓) 2. Cut four 1/2" pieces of foam tape.
- (✓) 3. Remove the paper backing from one side of a 1/2" piece of tape. Press the tape in place on one side of either meter as shown in the Detail. Be sure to center the tape from top to bottom.
- (✓) 4. Press another 1/2" piece of tape onto the other side of the meter.
- (✓) 5. In the same manner, install the remaining two 1/2" pieces of tape on the sides of the other meter.
- (✓) 6. M1: Position the REF meter (#407-758) into the meter cutout at M1 as shown in the Detail. Secure the sides of the meters with brackets P and R as shown. Tighten the bracket hardware.
- (✓) 7. M2: In the same manner, mount the FWD meter (#407-757) at M2 as shown in the Detail.




Refer to Pictorial 2-3 (Illustration Booklet, Page 5) for the following steps.


- (✓) Depress the three switch pushbuttons to their "in" positions.

NOTE: When you install the front panel label in the following step, do **not** press the label onto the front panel until you are absolutely certain it is positioned correctly. When the label's adhesive backing touches the surface of the front panel, it will be difficult to remove and reposition.

- (✓) Refer to Detail 2-3A and remove the paper backing from the front panel label. Holding the label stretched between both hands, carefully lower it onto the front panel, paying particular attention to the counter, switch assembly and meter cutouts. Lower the label onto the front panel. Then, working from the center outward in both directions, smooth the label firmly onto the front panel.

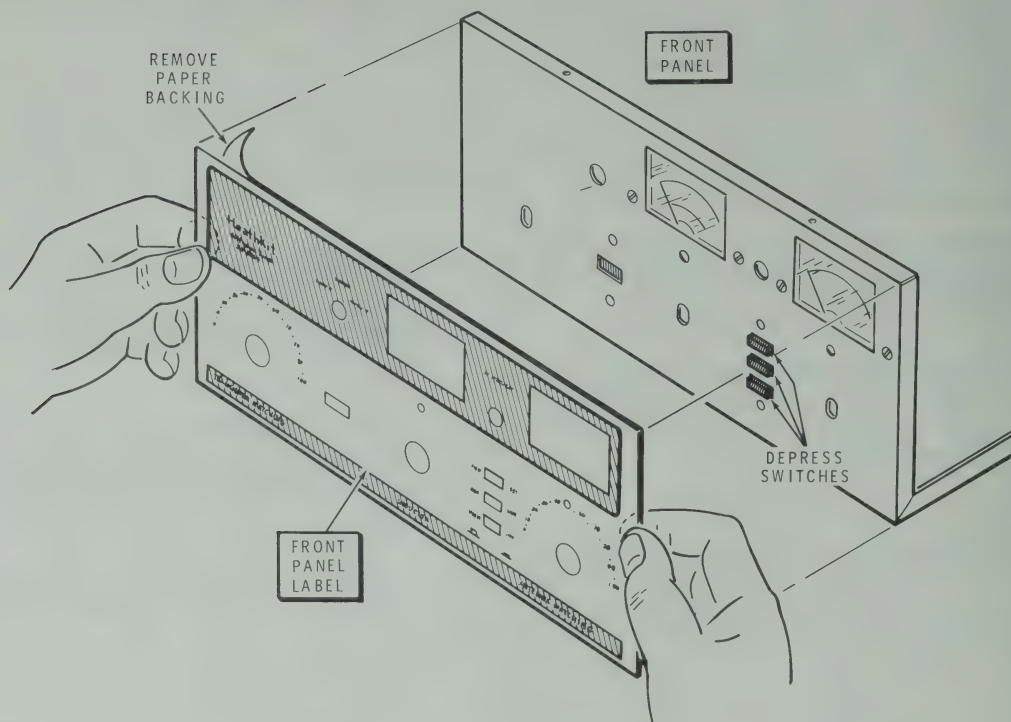


Detail 2-3A

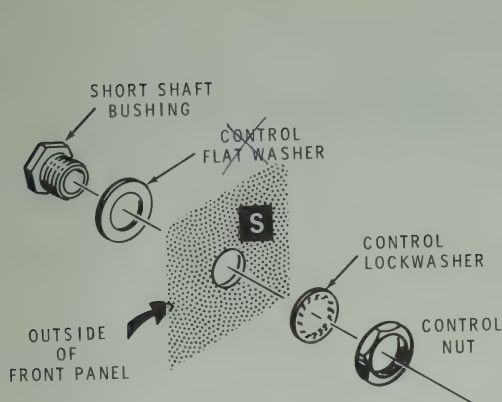


Detail 2-3B

- (✓) Refer to Detail 2-3B and loosely install a short shaft bushing in the front panel at S. Use a ~~control flat washer~~, a control lockwasher, and a control nut.
- (✓) In the same manner, loosely install short shaft bushings at T and X.

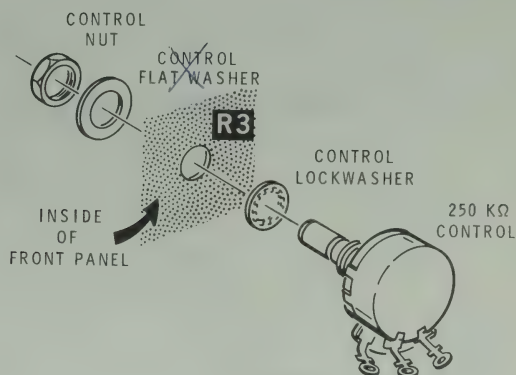


Detail 2-3C

- (✓) R3: Refer to Detail 2-3C and install a 250 kΩ control at R3 as shown. Use control hardware and position the control as shown in the Pictorial.
- (✓) Refer to Detail 2-3D and place a control lockwasher on the switch detent and install the detent in front panel hole Y. Secure the detent with a control flat washer and a control nut (tighten the hardware). Position the detent as shown in Pictorial 2-2.

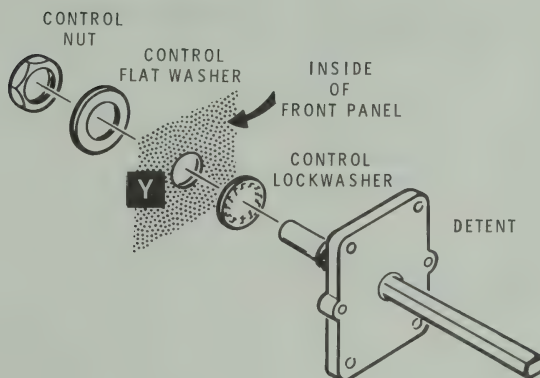

Detail 2-3D

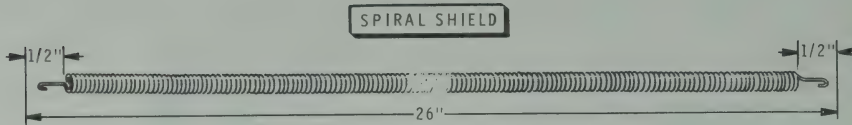

Detail 2-4A


FRONT PANEL WIRING

Refer to Pictorial 2-4 (Illustration Booklet, Page 6) for the following steps.

- (✓) Locate the spiral shield (#206-406). Pull on the ends of the shield and stretch it evenly to a length of 26".
- (✓) Refer to Detail 2-4A and, at both ends of the spiral shield, straighten the spiral for a length of 1/2". Then form a small hook in the wire end as shown.
- (✓) Measure the remote sensor cable from rear panel grommet A. Cut the cable to a 27" length.
- (✓) Tightly twist together the wire ends of the remote sensor cable (a tightly-wrapped piece of tape may be helpful). Then push the free end of the cable all the way through the spiral shield, until the rear end of the shield touches cable clamp G on the rear panel.
- () Temporarily refer to inset #2 on Pictorial 6-4 (Illustration Booklet, Page 12) and connect the hook on the rear end of the spiral shield to the inner side of cable clamp G.
- (✓) At the front end of the spiral shield, untwist the bare wire ends of the remote sensor cable.

NOTES:

1. In the following steps, (NS) means not to solder because other wires will be added later. "S-" with a number, such as "S-3," means to solder the connection. The number following the "S" tells how many wires are at the connection.
2. When you are instructed to prepare a stranded wire, as in the following step, cut the wire to the length indicated and remove 1/4" of insulation from each wire end. Then tightly twist the wire ends and add a small amount of solder to hold the fine strands together.
- () Cut off the black wire an additional 3/4". If necessary, also remove a short piece of the cable outer insulation.
- () Prepare the five sensor cable wire ends.

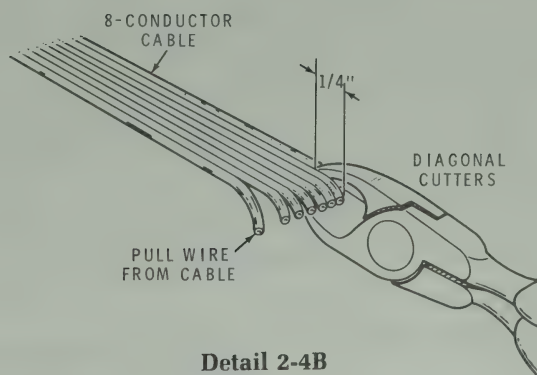

Detail 2-4B

Connect the free ends of the remote sensor cable and the wire end of the spiral shield as follows:

(✓) Connect the hook on the free end of the spiral shield to solder lug K (NS).

(✓) Connect the end of the black wire to solder lug K (NS).

(✓) Connect the end of the brown wire to SW3 lug 6 (S-1).

(✓) Connect the end of the white wire to SW3 lug 1 (S-1).

(✓) Connect the end of the red wire to SW3 lug 4 (NS).

(✓) Connect the end of the green wire to SW3 lug 3 (NS).

(✓) Locate the 9" length of 8-conductor cable.

(✓) Refer to Detail 2-4B and cut and separate the individual wire ends, using diagonal cutters, at one end of the 8-conductor cable. One at a time, pull each individual wire from the cable so you will have eight separate wires. NOTE: You will use these wires to continue wiring your kit.

(✓) Prepare the following stranded wires:

1-1/4" blue	2" green
2-1/4" violet	2" red


(✓) Connect a 1-1/4" blue wire from SW3 lug 2 (S-1) to SW2 lug 2 (S-1).

(✓) Connect a 2-1/4" violet wire from SW3 lug 5 (S-1) to SW1 lug 2 (S-1).

(✓) Connect a 2" green wire from SW3 lug 3 (S-2) to SW1 lug 6 (S-1).

(✓) Connect a 2" red wire from SW3 lug 4 (S-2) to SW1 lug 4 (S-1).





Detail 2-5A

Refer to Pictorial 2-5 (Illustration Booklet, Page 6) for the following steps.

- (✓) Cut both leads of a 40.2 kΩ (yel-blk-red-red) resistor to 1/2". Refer to Detail 2-5A and form the resistor leads as shown.

- (✓) R1: Place one of the 40.2 kΩ resistor leads into the **eyelet** at lug 1 of terminal strip J as shown in the Pictorial (S-1). Carefully cut the end of the other resistor lead so it just goes through the eyelet at terminal strip lug 3. Solder the lead to the eyelet. Cut any excess lead length from terminal strip lug 1.

- (✓) Carefully check the space between the inside of the terminal strip and the top of the switch assembly. If necessary, bend the terminal strip outward slightly to provide the necessary clearance.

- (✓) Bend the top of terminal strip J lug 3 downward onto switch SW1 lug 1. Be sure the terminal strip lug touches only the designated switch lug. Solder the connection.

- () Prepare the following stranded wires:


4" orange
2-1/2" yellow
3" red
4-1/2" gray

NOTE: In the following steps, temporarily move any switch wires as necessary to allow clearance as you solder other connections.

- (✓) Connect one end of a 4" orange wire to switch SW2 lug 5 (S-1). Route the free end of the wire under SW2 as shown; it will be connected later.
- (✓) Connect a 2-1/2" yellow wire from switch SW2 lug 4 (S-1) to control R3 lug 1 (S-1).
- (✓) Remove an additional 1/4" of insulation from one end of the 3" red wire.

NOTE: When a wire or wires pass through one connection to another connection, each wire at the first connection will be counted as two wires in the solder instructions, one entering and one leaving the connection.

- (✓) Connect the short prepared end of the 3" red wire to switch SW1 lug 5 (S-1). Route the wire upward and around the terminal strip as shown. Pass the end of the wire through control R3 lug 2 (S-2) to lug 3 (S-1).
- (✓) Connect one end of a 4-1/2" gray wire to terminal strip J lug 2 (NS). Route the wire toward the center of the front panel.



Refer to Pictorial 2-6 (Illustration Booklet, Page 7) for the following steps.


- (✓) Prepare a 3" gray wire and a 4" brown wire.
- (✓) Connect one end of a 3" gray wire to terminal strip J lug 2 (S-2). Route the end of the wire toward the outer (right) edge of the front panel; it will be connected later.
- (✓) Connect one end of a 4" brown wire to terminal strip J lug 1 (S-1). Route the wire toward the left side of the front panel (as viewed from the rear); it will be connected later.
- (✓) C7: Connect a .001 μ F ceramic capacitor between meter M1 lugs 1 (NS) and 2 (NS). Position the capacitor as shown. Cut off the excess lead lengths.
- (✓) C8: In the same manner, connect a .001 μ F ceramic capacitor between lugs 1 (NS) and 2 (NS) of meter M2.
- (✓) Connect the free end of the orange wire coming from SW2 lug 5 to meter M1 lug 1 (S-2).
- (✓) Connect the free end of the longer gray wire coming from terminal strip J lug 2 to meter M1 lug 2 (S-2).
- (✓) Connect the free end of the shorter gray wire coming from terminal strip J lug 2 to meter M2 lug 2 (S-2).

- (✓) Connect the end of the brown wire coming from terminal strip J lug 1 to meter M2 lug 1 (S-2).

NOTE: In the following steps, you will connect the previously installed .01 μ F capacitors coming from the lugs of switch SW3 to ground lug K.

- (✓) C6: SW3 lug 6 to solder lug K (NS).
- (✓) C5: SW3 lug 4 to solder lug K (NS).
- (✓) C3: SW3 lug 1 to solder lug K (NS).
- (✓) C4: SW3 lug 3 to solder lug K (S-6). NOTE: Use enough solder and heat to assure a good connection on all six leads and wires at the solder lug. Grasp each wire and lead and wiggle it to be certain it is firmly soldered. Reheat the connection if necessary.
- (✓) Check the capacitors on the back of SW3 to make sure that none of the capacitor leads touch one another, and that none of them are shorted to other switch lugs. Reposition the capacitor(s) slightly if necessary.

This completes the front panel wiring. Check all meter, control, switch, and terminal strip connections to make sure they are soldered, that all wire and lead ends are cut off, and that no wires or leads are shorted to adjacent connections.

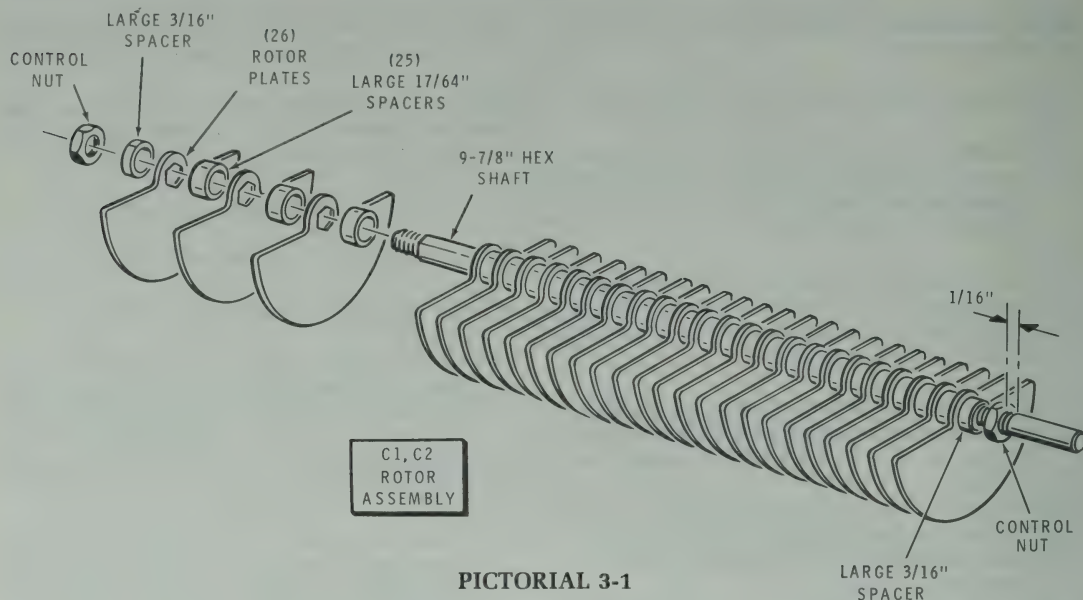

PICTORIAL 3-1

TRANSMITTER AND ANTENNA MATCHING CAPACITORS (C1 and C2)

Refer to Pictorial 3-1 for the following steps.

NOTE: In most of the following steps, you will find double check-off spaces — “() (),” one set for capacitor C1 and the other for C2. Perform all of the steps for one capacitor before you start to assemble the other.

(1) (1) Locate the following parts:


Two control nuts
One 9-7/8" hex shaft
Two large 3/16" spacers
25 large 17/64" spacers
26 rotor plates

Use the following procedure to assemble the matching capacitor rotor assembly:

- (✓) (✓) 1. Turn a control nut onto the indicated end of the 9-7/8" hex shaft. Adjust this control nut so the outside of the nut is 1/16" from the end of the unthreaded part of the shaft. Try not to disturb this nut when you perform the following steps.

- (✓) (✓) 2. Slide a large 3/16" spacer all the way onto the shaft so it is against the control nut.
- (✓) (✓) 3. Match the hex shaped hole in a rotor plate with the hex shape on the shaft. Then slide the rotor plate onto the shaft until it is against the 3/16" spacer.
- (✓) (✓) 4. Slide a large 17/64" spacer onto the shaft so it is against the first rotor plate.
- (✓) (✓) 5. Match the hex shaped hole in a second rotor plate with the hex shape on the shaft. Match the position of the second plate with that of the first rotor plate. Slide the rotor plate onto the shaft until it is against the first 17/64" spacer.
- (✓) (✓) 6. Repeat steps 4 and 5 until you have 26 rotor plates and 25 large spacers installed on the shaft.
- (✓) (✓) 7. Place another large 3/16" spacer on the rear of shaft.
- (✓) (✓) 8. Use the remaining control nut to secure the rotor plates and the spacers on the shaft.

Set the rotor assembly aside temporarily.

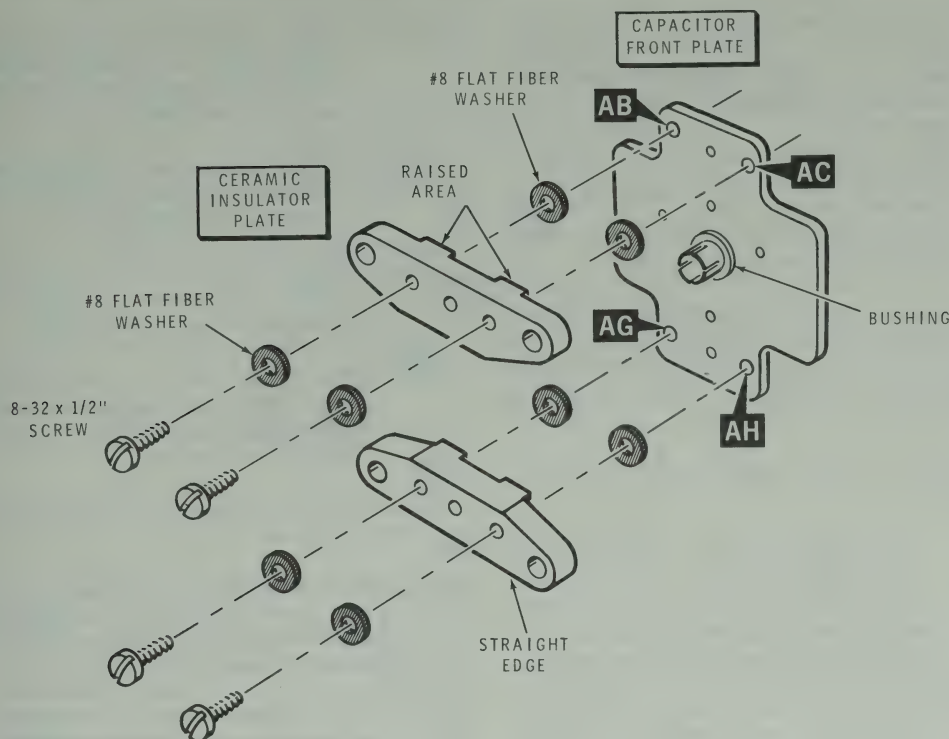

Detail 3-2A


Refer to Pictorial 3-2 (Illustration Booklet, Page 8) for the following steps.

NOTES:

1. The ceramic insulator plates have two raised areas on one side. When you are instructed to mount these plates to a capacitor plate, as in the next step, be sure you position the side with the raised area toward the capacitor plate. Also be sure you orient each insulator plate so its straight edge is positioned as shown in the Detail.
2. When you tighten the 8-32 \times 1/2" screws to secure the capacitor insulator plate to a capacitor plate, do **not** overtighten the screws as you may break the ceramic insulator plate.

(✓) (✓) Refer to Detail 3-2A and mount a ceramic insulator plate to a capacitor **front** plate at AB and AC. Use an 8-32 \times 1/2" screw and two #8 flat fiber washers at each of the two holes. Make sure you install the insulator plate on the same side as the bushing, as shown. Also, hold this side of the front plate against a flat surface when you tighten the screws. This will make sure the top edge of the ceramic insulator plate is flush with the top edge of the capacitor front plate.

(✓) (✓) Similarly, mount another ceramic insulator plate to the capacitor front plate at AG and AH.



- (✓) (✓) Locate the following parts:

Two 10-32 × 9-7/8" threaded brass rods
 Four #10 flat fiber washers
 Eight 10-32 nuts
 Two small 3/16" spacers
 50 small 17/64" spacers
 25 stator plates
 One capacitor front plate assembly (assembled in a previous step)

NOTE: In the following step, you will assemble the antenna matching capacitor stator assembly. Carefully assemble the parts as shown in the Pictorial. Be sure each part is in its proper place, and that you tighten the indicated nuts properly.


Assemble the stator section of the matching capacitor as follows:

- (✓) (✓) 1. Start a 10-32 nut onto one end of each threaded rod. Turn one of these nuts onto each threaded rod until it is all the way onto the threaded portion of the rod. Back this nut off until **two threads** are exposed.
- (✓) (✓) 2. Start a second 10-32 nut onto each threaded rod. Position the nut 3/16" from the first nut as shown. NOTE: This nut may be adjusted later.
- (✓) (✓) 3. Slide a #10 flat fiber washer onto the end of each threaded rod.
- (✓) (✓) 4. Position the capacitor front plate assembly as shown (note the position of the ceramic insulator plates and the three indicated holes). Then insert the ends of the threaded rods (that have the nuts) through holes AA and AD in the indicated ceramic insulator plate.
- (✓) (✓) 5. Slide a #10 flat fiber washer onto the end of each threaded rod.
- (✓) (✓) 6. Start a 10-32 nut onto the end of each threaded rod. Turn these nuts onto the rods until the ceramic insulators are snug. Do **not** overtighten the nuts and break the insulator.


- (✓) (✓) 7. Slide a 17/64" small spacer onto each threaded rod. NOTE: Do not use the two small 3/16" spacers until a step specifically calls for them.
- (✓) (✓) 8. Slide a stator plate onto the two threaded rods. Be sure to position the stator plate as shown in the Pictorial.
- (✓) (✓) 9. Repeat steps 7 and 8 until you have the 50 small 17/64" spacers and 25 stator plates installed on the threaded rods.
- (✓) (✓) 10. Slide one of the small 3/16" spacers onto each threaded rod and secure them with a 10-32 nut on each rod. Tighten these nuts until they are snug.

Refer to Pictorial 3-3 (Illustration Booklet, Page 9) for the following steps.

- (✓) Refer to Detail 3-3A and open the grease pod by cutting across one corner and into the pod just enough to make a small opening. Use diagonal cutters or scissors.
- (✓) (✓) Squeeze out an amount of grease equal to a medium-sized pea; then use a toothpick and apply the grease to the rotor shaft at the three locations shown in the Pictorial.
- (✓) (✓) Refer to inset drawing #1 on the Pictorial and identify the curved side of a dished spring. Then slide the spring onto the rotor shaft so the curved side is toward the rotor plates.
- (✓) (✓) Position the rotor and stator assemblies as shown in the Pictorial. Then push the rotor shaft through the bushing in the capacitor front plate as far as it will go.




Detail 3-3A

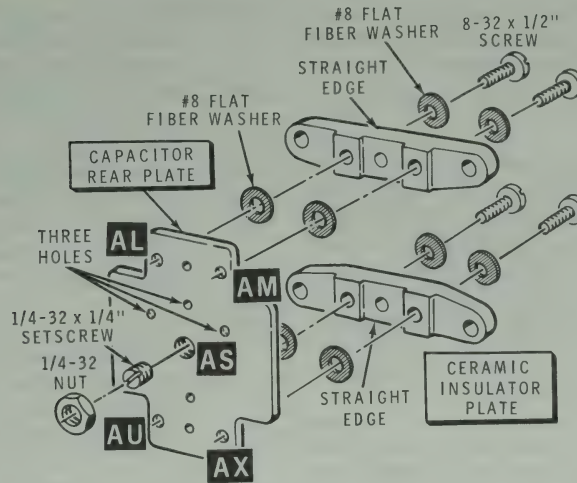



Detail 3-3B

- (✓) (✓) Refer to Detail 3-3B and mount a ceramic insulator plate to a capacitor rear plate at AL and AM. Use an 8-32 × 1/2" screw and two #8 flat fiber washers at each of the two holes. Hold this side of the rear plate against a flat surface when you tighten the screws. This will make the top edge of the ceramic insulator plate flush with the top edge of the capacitor rear plate.
- (✓) (✓) Similarly, mount another ceramic insulator plate to the capacitor rear plate at AU and AX. Use an 8-32 × 1/2" screw and two #8 flat fiber washers at each of the two holes.
- (✓) (✓) Refer again to Detail 3-3B and start a 1/4-32 × 1/4" setscrew into a 1/4-32 nut. Then install the setscrew in hole AS. Turn the screw in until the unslotted end is flush with the other side of the plate. Do **not** tighten the nut yet.
- (✓) (✓) Position the capacitor assembly as shown in the Pictorial.
- (✓) (✓) Turn a second 10-32 nut onto each of the two threaded rods of the capacitor assembly. Turn each of these nuts until there is 1/16" space between the inner and outer nuts as shown in the Pictorial.
- IMPORTANT:** The rear plate assemblies will be mounted differently on capacitors C1 and C2. Mark each capacitor rear plate assembly for identification in one of the next two steps.
- (✓) To mark the rear plate assembly for **capacitor C1** (only): Study Detail 3-3B carefully and note the location of the three small holes, just above the larger center hole. Turn the assembly top-side down so these three holes are **below** the larger center hole. On the **upper** ceramic insulator plate, write "C1 — TOP." Then, in a following step, when you are instructed to mount the end plate assembly, make **sure** this lettering is positioned upward.
- (✓) To mark the rear plate assembly for **capacitor C2** (only): Make certain the assembly is positioned **exactly** as shown in Detail 3-3B with the three holes positioned **above** the larger center hole. On the upper ceramic insulator plate, write "C2 — TOP." Be sure this lettering is positioned upward when the assembly is mounted onto the capacitor main assembly in another step.
- (✓) (✓) Slide a #10 flat fiber washer onto the end of each threaded rod.



- (J) (✓) Apply a small amount of grease in the recessed area in the end of the setscrew installed in hole AS of the rear capacitor plate. Then place a steel ball in the recessed area of the rotor shaft.
- (L) (✓) Position the capacitor rear plate assembly as shown (note the position of the lettered end of the ceramic insulator plates). Then insert the ends of the threaded rods through the corresponding holes in the ceramic insulator plate. Use 10-32 nuts and #10 flat fiber washers to secure the assembly. Do **not** overtighten the screws.
- (F) (✓) Mount a capacitor mounting bracket on each end of the capacitor assembly as shown. Use four 8-32 \times 5/8" screws, eight #8 flat fiber washers, and two 8-5/16" tapped spacers. Set the capacitor assembly on a flat surface before you tighten the screws. Do **not** overtighten the screws.
- (J) (✓) Tighten the setscrew in hole AS of the capacitor rear plate only until you feel some resistance; then tighten the setscrew 1/4-turn more. Now tighten the 1/4-32 nut at AS.
- (✓) (✓) Refer to inset drawing #2 on the Pictorial and, if necessary, form the end of each of the two forked springs into a small tab. Use a pair of long-nose pliers. Set one of these springs aside until it is called for during the assembly of the transmitter matching capacitor.
- (U) (✓) Refer to inset drawing #3 on the Pictorial and form the curved part of each forked spring so it is exactly like the drawing. You can position the forked springs over the actual size drawing to check them.
- (L) (✓) Use long-nose pliers to hold a forked spring. Then lower the spring over the end of the rotor shaft. Push the spring down and insert the tab of the spring into hole AP in the capacitor rear plate. NOTE: On capacitor C1, hole AP is **below** the center; the fork end of the spring will point upward.




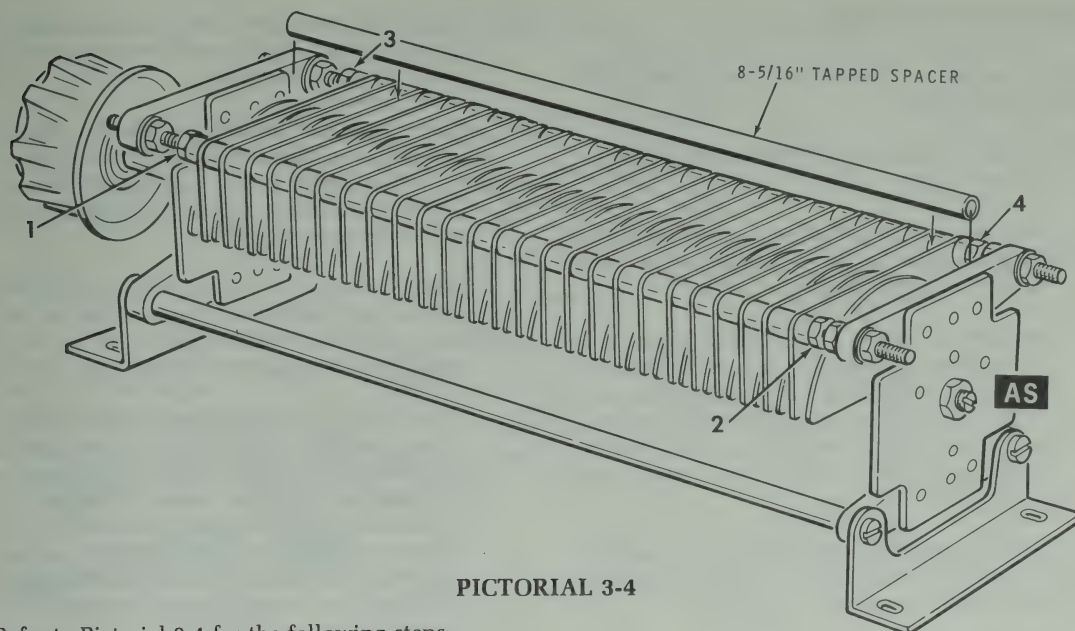

PICTORIAL 3-4

Refer to Pictorial 3-4 for the following steps.

- (✓) (✓) Position the capacitor assembly as shown in the Pictorial.
- (✓) Refer to Detail 3-4A and start two 8-32 \times 3/16" setscrews into each of the three 2" knobs.
- (✓) (✓) Push one of the knobs onto the capacitor shaft. Then temporarily tighten the two setscrews in the knob.
- (✓) (✓) Turn the capacitor shaft so the plates are fully meshed (closed).
- (✓) (✓) Turn nuts 1, 2, 3 and 4 (as necessary) to position each plate in the stator halfway between two corresponding rotor plates. Carefully inspect the capacitor assembly from one side, then the other side, to make sure each stator plate is positioned properly. Then tighten the four nuts.
- (✓) (✓) Turn the knob several times each way and note the torque needed to turn the shaft. This is the recommended tension adjustment. If you desire to have the shaft turn easier or harder, loosen or tighten the setscrew in the capacitor rear plate as desired. Keep in mind that the tension will loosen somewhat by itself during normal operation.
- (✓) (✓) Loosen the setscrews in the knob and remove the knob from the shaft. Set the knob aside temporarily.



Detail 3-4A

NOTE: In the following steps, first locate an unused 8-5/16" tapped spacer. Then use the spacer to check the top (inside) spacing of the top ceramic insulators as shown in Pictorial 3-4. Do this at **both** upper corners, close to each threaded brass rod.


This completes the assembly of the matching capacitor. Set the capacitor aside until it is called for in a step. If you have not assembled both capacitors return to "Transmitter and Antenna Matching Capacitors (C1 and C2)" on Page 26 and complete the steps for the other capacitor. When you complete both capacitors, proceed to the following section.

ROLLER INDUCTOR (L1)

Refer to Pictorial 4-1 (Illustration Booklet, Page 10) for the following steps.


- (✓) Peel the paper from both sides of the two inductor end plates.
- (✓) Position one of the inductor end plates as shown in Detail 4-1A (note the position of the seven holes in the plate).
- (✓) Bend the 4-1/4" strap over the indicated edge of the inductor end plate. Secure the strap to the plate at hole BK with a long shaft bushing and a control nut. Be sure the small holes in the strap line up with the corresponding hole in the inductor end plate before you tighten the hardware.

NOTE: The inductor end plate you just prepared will be referred to as the **rear** inductor end plate. Set the rear inductor end plate aside temporarily.

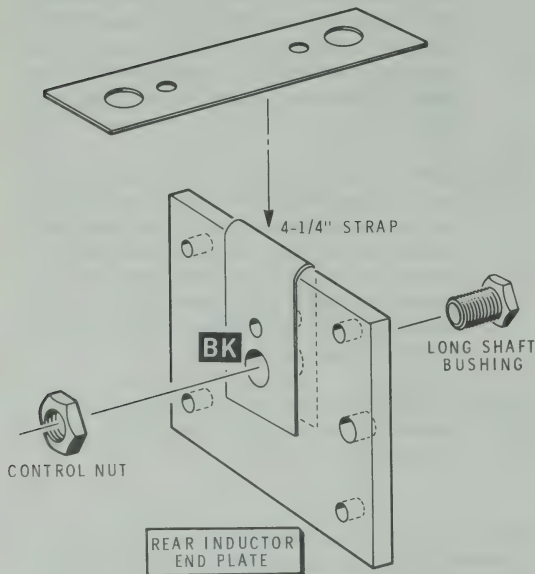


Detail 4-1A

- (✓) Position the remaining inductor end plate as shown in Detail 4-1B (note the position of the seven holes in the plate).
- (✓) Refer to the inset drawing on Detail 4-1B and straighten the control solder lug. Then mount the control solder lug at hole BC with a long shaft bushing and a control nut. Tighten the nut only finger tight at this time.
- (✓) Mount an 8-32 × 8-5/16" tapped spacer to the inductor end plate at BA. Use an 8-32 × 5/8" screw, a #8 lockwasher and a #8 flat steel washer. Tighten the screw only finger tight.
- (✓) Mount a capacitor mounting bracket to the inductor end plate at BE and BF. Use an 8-32 × 8-5/16" tapped spacer, an 8-32 × 5/8" screw, a #8 solder lug, and a #8 flat steel washer at BE. Use an 8-32 × 8-5/16" tapped spacer, an 8-32 × 5/8" screw, a #8 lockwasher, and a #8 steel flat washer at BF. Tighten these screws only finger tight. Position the solder lug at BE straight up (toward the spacer at BA).
- (✓) Refer to Detail 4-1C and position the control solder lug at BC so it touches the #8 solder lug at BE. Then solder these lugs together. Now tighten the control nut at BC.
- (✓) Apply grease to both ends of the inductor shaft at the locations shown in the Pictorial.
- (✓) Note that the bushing on one end of the roller inductor is longer than the bushing at the other end. Slide the shaft at this end of the roller inductor into the bushing at BC in the front inductor end plate.
- (✓) Slide the shaft collar onto the rear shaft of the roller inductor. Do **not** tighten the setscrew in the collar at this time.
- (✓) Refer to the inset drawing on the Pictorial and identify the curved side of a brass spring washer. Then slide the spring washer on the rear shaft of the roller inductor with the curved side of the spring washer toward the inductor.
- (✓) Slide two contactor springs onto the spacer mounted at BF. Be sure to position these springs as shown in the Pictorial.

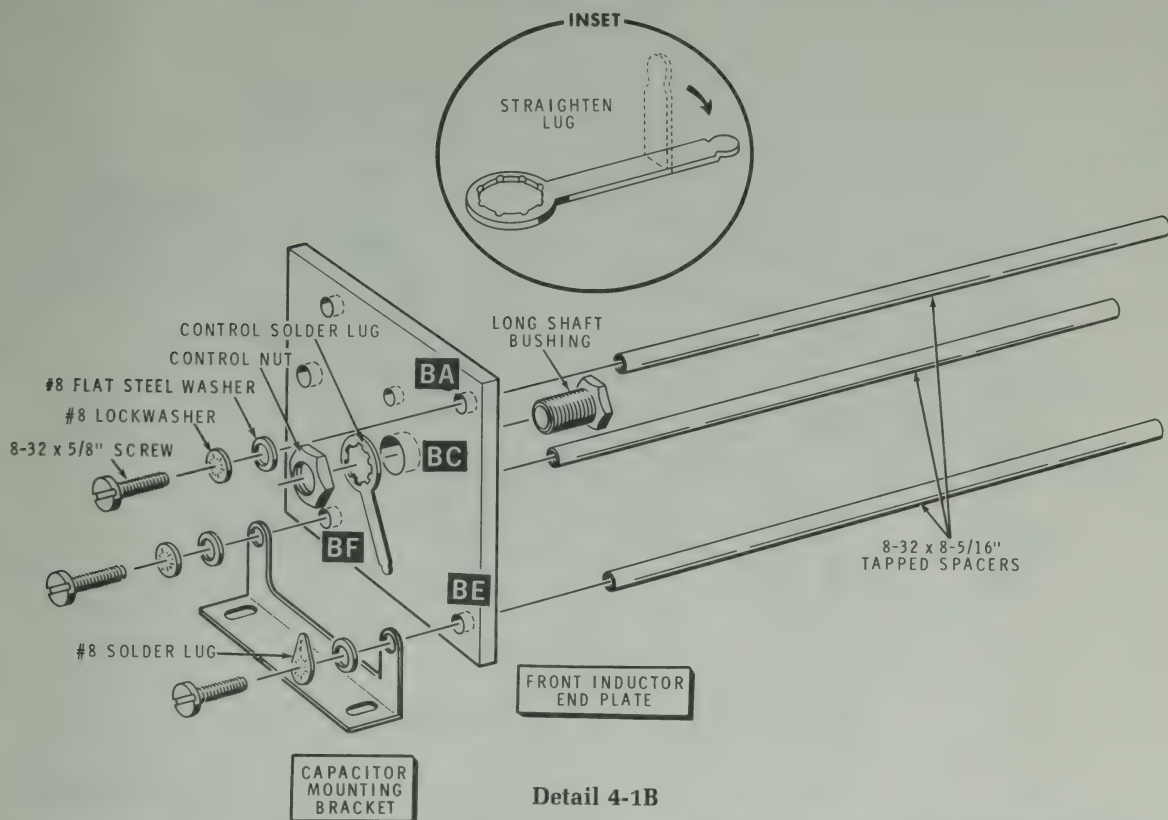



Detail 4-1B

- (✓) Start the bushing in the rear inductor end plate (assembled earlier) onto the rear shaft of the roller inductor. Be sure to position the end plate as shown in the Pictorial.
- (✓) Line up hole BG with the spacer coming from hole BA of the front end plate. Then mount the rear inductor end plate to the spacer. Use an 8-32 x 5/8" screw, a #8 lockwasher and a #8 flat steel washer. Tighten the screw only finger tight.
- (✓) Mount a capacitor mounting bracket to the rear inductor end plate and the remaining spacers at BM and BN. Use two 8-32 x 5/8" screws, two #8 lockwashers, and two #8 flat steel washers. Tighten these screws only finger tight.

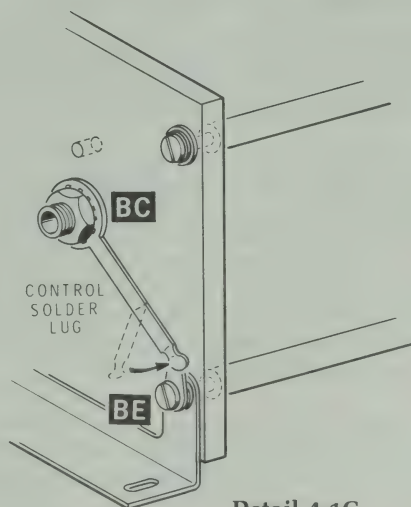

Detail 4-1C



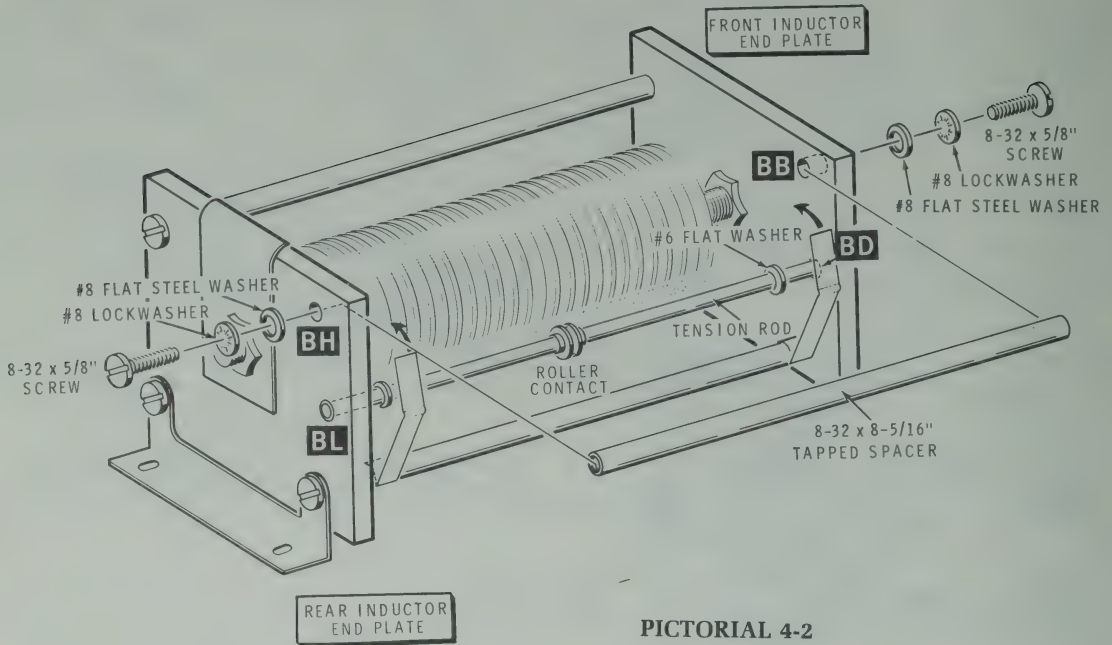


PICTORIAL 4-2

Refer to Pictorial 4-2 for the following step.

- (✓) Slide a roller contact onto the tension rod. Then slide a small #6 flat washer onto each end of the tension rod.
- (✓) Start one end of the prepared tension rod into hole BD in the front inductor end plate.
- (✓) Start the free end of the tension rod into hole BL in the rear inductor end plate. Be sure the groove in the roller contact rests on one of the wire turns of the inductor. Also be sure the #6 flat washers are on the side of the contactor springs **away** from the end plates.
- (✓) Position the two contactor springs toward the ends of the tension rod. Be sure the flat washers on the tension rod are on the inner sides of the contactor springs.
- (✓) Push an 8-32 × 8-5/16" tapped spacer between the front and rear inductor end plates. Be sure the contactor springs are **inside** the spacer as shown. Then mount the spacer at BB and BH. Use two 8-32 × 5/8" screws, two #8 lockwashers, and two #8 flat steel washers. Tighten the screws only finger tight.
- (✓) Set the roller inductor assembly on a flat surface. Then tighten the four screws on each inductor end plate.
- (✓) Push the inductor against the bushing in the front inductor end plate. Then push the collar on the rear inductor shaft firmly toward the rear inductor end plate and tighten the setscrew.

This completes the assembly of the roller inductor. Set the roller inductor aside until it is called for in a step.

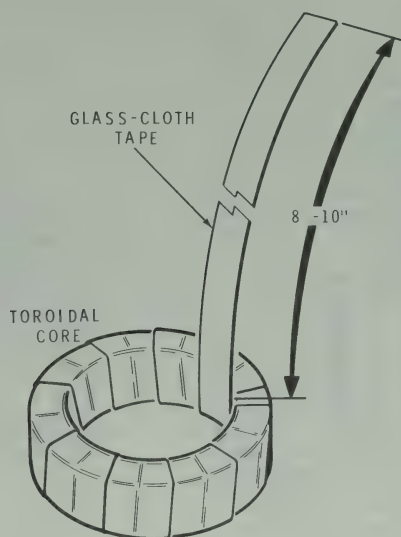

PICTORIAL 5-1

BALUN COIL (T1)


Refer to Pictorial 5-1 for the following steps.


NOTE: In the following steps, be careful so the adhesive on one side of the tape does not stick to itself when you handle the tape.

- (✓) Cut a 36" length off the roll of glass-cloth tape.
- (✓) Wrap this length of tape around one toroidal core to cover it completely with one layer. As

you wrap the tape around the core, make sure you pull the tape snug. Make sure each turn overlaps the previous turn about 1/4". When you have covered the whole core with tape, you should have 8-10" remaining. Do **not** cut this end off.

- (✓) Similarly, use another 36" length of tape to cover the remaining toroidal core with one layer of tape.




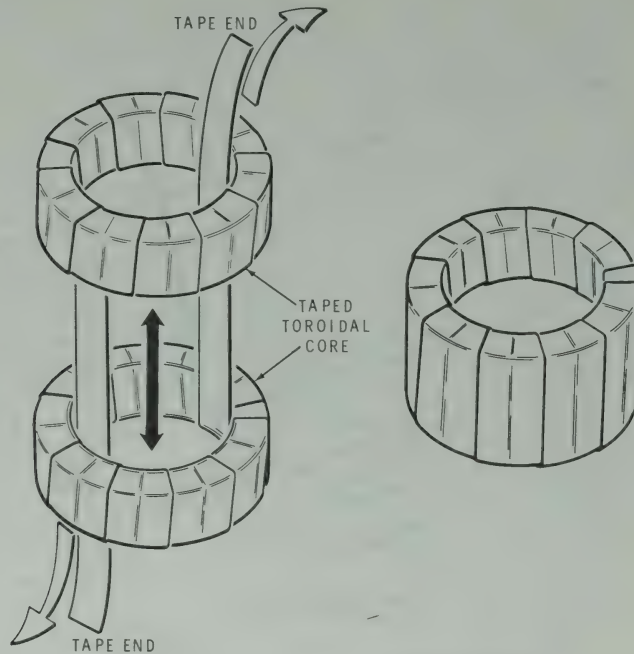


PICTORIAL 5-2

Refer to Pictorial 5-2 for the following steps.

- (✓) Hold one pretaped core between the thumb and index finger on your left hand. Then grasp the remaining pretaped core with your right hand, slip the free end of the tape down through the center of the first core and place the cores on top of each other as shown.
- () Cut two 15" lengths of glass-cloth tape.
- () Wrap one of the tape lengths around the stacked cores at one of the two areas not previously covered with tape. Make sure you wrap the tape so it will overlap part of the tape ends already wrapped around the cores. If necessary, cut off any excess tape length.
- (✓) Position the pretaped cores so the tape ends are located opposite each other. Then while you hold both cores in place, firmly wrap the whole length of each tape around both cores. As before, make sure each turn overlaps the previous turn about 1/4".
- () Similarly, wrap the other 15" length of tape around the cores at the area opposite the one covered in the last step. If necessary, cut off any excess tape.



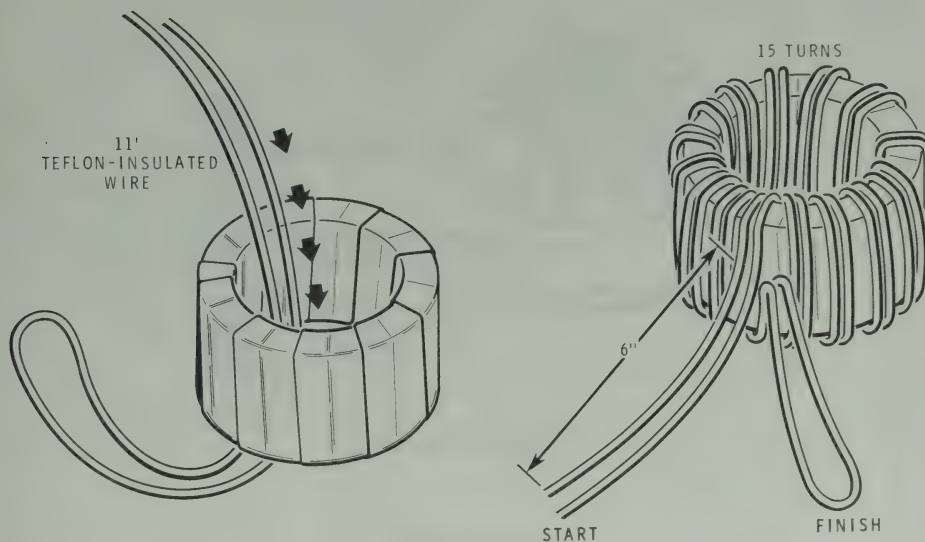

PICTORIAL 5-3

Refer to Pictorial 5-3 for the following steps.


- () Locate the Teflon-insulated wire and cut it to a length of 11 feet.

NOTE: When you perform the next two steps, be sure to pull each winding until it is snug. An easy way to do this is to hook the folded end of the wire around a door knob or similar object and then pull the wire until it is tight.

- () Fold the 11-foot wire in the middle. Then push the folded end through the center of the dual

core assembly and wind one turn onto the cores. Adjust the two free wires until you have a length of about 6" from the cores to the wire ends. Pull the wires firmly against the cores.

- () Continue to loop the folded end of the wire around the core assembly, through the center of it, until you have a total of 15 turns wound on the cores. Make sure you pull the wires snug for each turn you wind. Make sure the wires do not twist or overlap the other wires.

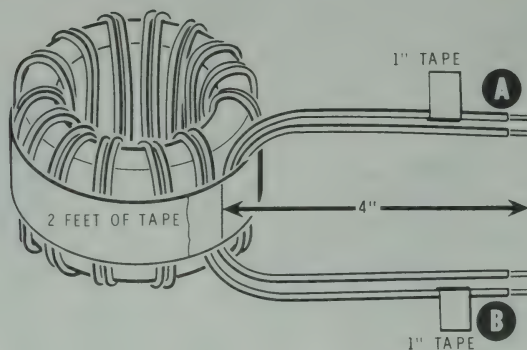


PICTORIAL 5-4


Refer to Pictorial 5-4 for the following steps.

- (1) Cut a 2-foot length of glass-cloth tape.
- (2) Position the wire ends of the balun assembly as shown. Make sure the first and the last turns of the winding are pushed firmly down against the cores. Then start to wrap the 2-foot length of tape around the outer circumference of the assembly to hold these turns in place. As you wrap the tape onto the assembly, position each pair of wires so they are about evenly spaced all the way around the assembly. Wrap the entire 2-foot length of tape onto the assembly.
- (3) Cut the wire ends to the dimensions shown in the Pictorial and remove $1/4$ " of insulation from each wire end. Then twist the strands on each wire together and melt a **small** amount of solder on the wire ends to hold the strands together.

NOTE: The balun coil consists of two separate windings. When you install the balun, one wire end from each winding will be connected to the chassis. Complete the next three steps carefully to make sure you select the proper wire ends.

- (4) At end A of the balun, wrap a 1" piece of tape around one of the two wire ends.
- (5) Turn on your ohmmeter and set it to the $R \times 10$ range.
- (6) Connect one of the test leads to the wire with tape around it. Then connect the other test lead to one of the wires at end B of the balun. Wrap a 1" length of tape around the wire end that does **NOT** show continuity.




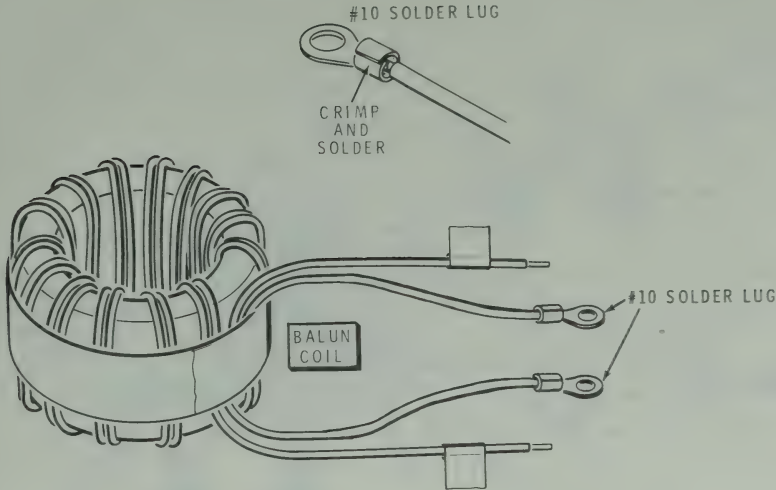

PICTORIAL 5-5


Refer to Pictorial 5-5 for the following steps.

- (✓) Refer to Detail 5-5A and temporarily mount a #10 solder lug on a threaded rod of either matching capacitor (C1 or C2). Secure the solder lug with a 10-32 nut, but tighten it only enough to prevent the lug from turning. Now use a pair of long-nose pliers to remove and discard the metal sleeve from the lug. Then remove the nut and the solder lug from the threaded rod.
- (✓) In the same manner, remove and discard the metal sleeve from one more #10 solder lug. Set the matching capacitor and the 10-32 nut aside for use later.
- (✓) Insert the bare end of one of the **untaped** balun coil wires into a #10 solder lug as shown. Crimp the tabs of the solder lug tightly against the wire. Then solder the connection.
- (✓) In the same manner, install a #10 solder lug on the remaining **untaped** balun coil wire.

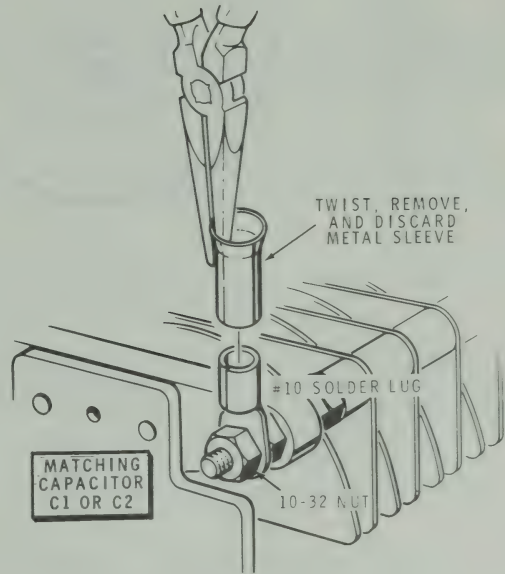


Detail 5-5A

This completes the assembly of the balun coil. Set the balun coil aside until it is called for in a step.

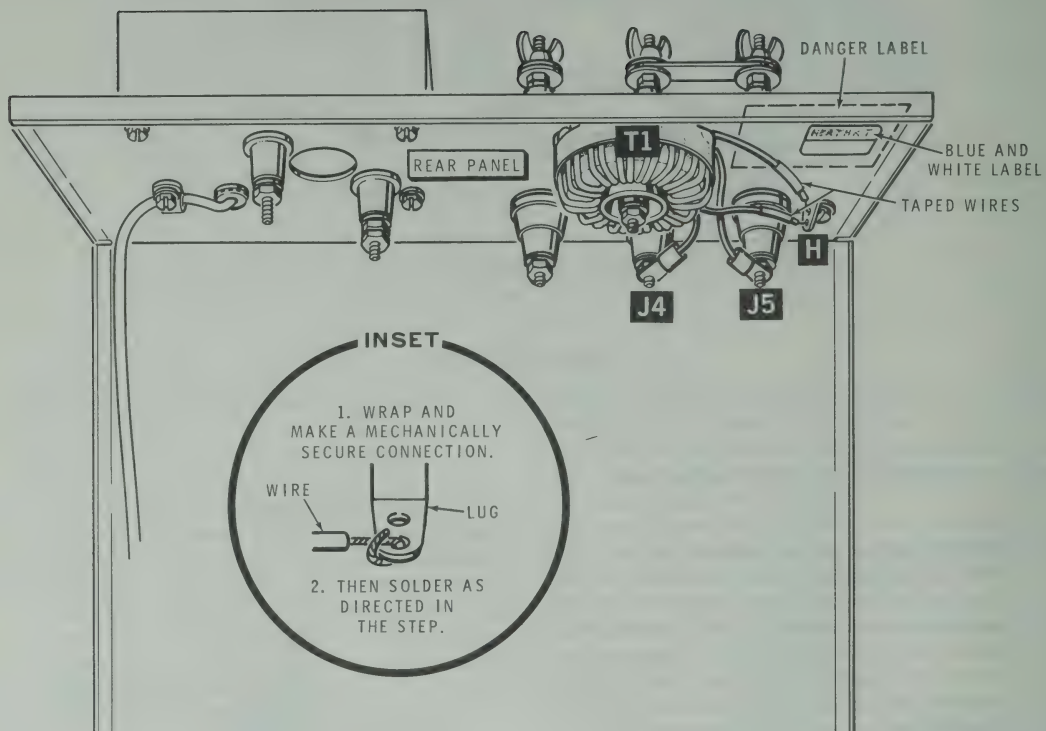

PICTORIAL 6-1

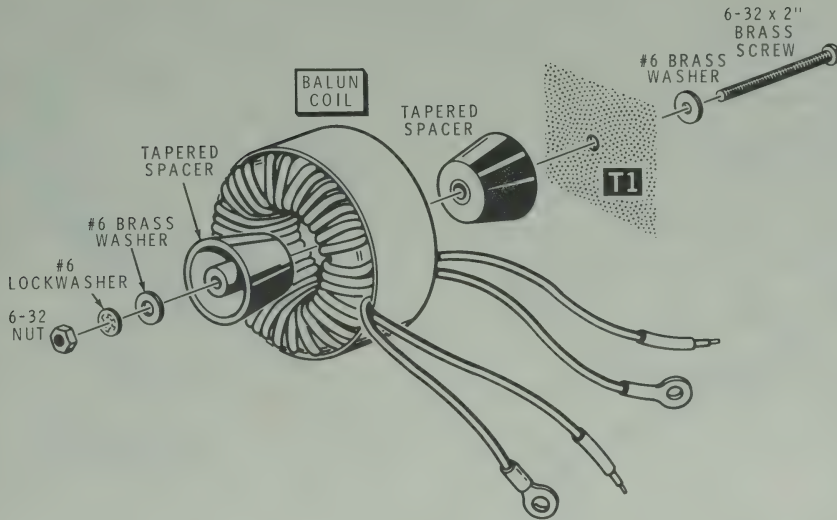


Detail 6-1A


CHASSIS FINAL ASSEMBLY

Refer to Pictorial 6-1 for the following steps.

- (✓) T1: Refer to Detail 6-1A and mount the balun coil on the rear panel at T1 as follows: Place a #6 brass washer on a 6-32 x 2" brass screw; then start the screw through rear panel hole T1. Place a tapered spacer on the screw and position the center of the balun coil over the spacer as shown. Place another tapered spacer on the screw, tapered end pointing inward. Secure the assembly with a #6 brass washer, a #6 lockwasher, and a 6-32 nut. Position coil T1 as shown in the Pictorial.
- (✓) Connect **both** of the taped wires coming from coil T1 to solder lug H. Be sure to make secure mechanical connections as shown in the inset drawing on Pictorial 6-1. Use sufficient solder and heat to assure a good connection.
- (✓) Remove the outer nuts from large feedthrough insulators J4 and J5.
- (✓) Place the solder lug on either of the untaped balun coil wires onto feedthrough J4 with the nut you removed in the last step. Tighten the nut snugly.
- (✓) In the same manner connect the remaining coil wire onto feedthrough J5. Tighten the nut snugly.
- (✓) Push all four balun coil wires back against the inside of the rear panel.
- (✓) Remove the paper backing from the blue and white label and press the label in place on the inside of the rear panel in the upper right corner as shown. NOTE: Be sure to refer to the model and series numbers on the blue and white label in any correspondence you have with the Heath Company about your kit.
- (✓) Remove the paper backing from the red "Danger" label and press the label in place on the outside of the rear panel, directly behind the blue and white label. (Note the dotted outline on the Pictorial).

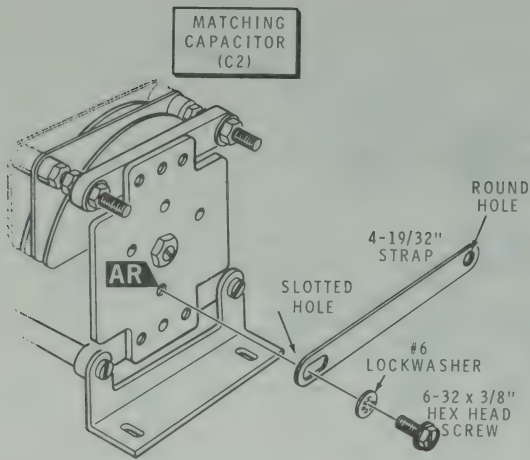

Detail 6-2A

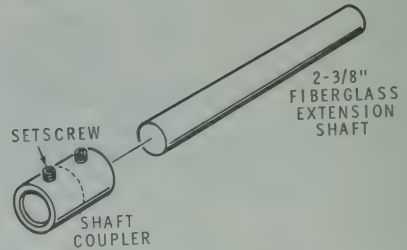


Detail 6-2B

Refer to Pictorial 6-2 (Illustration Booklet Page 11) for the following steps.

- (✓) Refer to Detail 6-2A and, on the rear mounting plate of matching capacitor C2, mount the **slot-ted hole** of a 4-19/32" strap at hole AR, (just below the center setscrew). Use a 6-32 x 3/8" hex head screw and a #6 lockwasher. Tighten the screw only finger tight. Position the strap as shown in the Detail.
- (✓) Refer to Detail 6-2B and secure a shaft coupler onto one end of 2-3/8" fiberglass extension shaft. Position the shaft halfway into the coupler and secure it with the setscrew.
- (✓) In the same manner, prepare the other fiberglass extension shaft using a shaft coupler.
- (✓) Refer to inset drawing #1 on the Pictorial and apply a small amount of grease to each fiberglass extension shaft as shown.
- (✓) Refer to Detail 6-2C and position either fiberglass shaft into front panel bushing S. Then position matching capacitor C2 into the chassis and its shaft all the way into the shaft coupler. Tighten the coupler setscrew onto the shaft. Do not tighten bushing S.



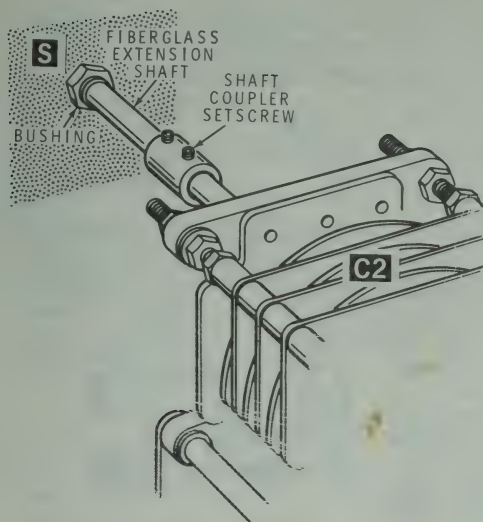


Detail 6-2C

- (✓) Refer to inset drawing #2 and loosely mount the capacitor into the bottom of the chassis at CA, CB, and CC with 6-32 \times 3/8" hardware. Be sure to use two #6 brass washers on each screw as shown.
- (✓) Refer to inset drawing #3 and, at CD, place a #6 brass washer onto a 6-32 \times 5/8" screw and push the screw firmly into a round foot. Then loosely secure the foot and the screw to the capacitor bracket and the chassis with a #6 brass washer, a #6 lockwasher, and a 6-32 nut.
- (✓) Push capacitor C2 as far forward as it will go; then tighten the mounting hardware at CA, CB, CC, and CD.
- (✓) Tighten front panel bushing S. If necessary, hold the nut on the inside of the panel with long-nose pliers.


NOTE: In the next two steps, you should mark each portion of the 6" strap; one will be slightly longer than the other.

- (✓) Locate the narrow 6" strap. Cut a 3-1/4" length from one end of the strap. Refer to Detail 6-2D and, with heavy pliers, flatten the upper end of one of the #10 solder lugs as shown. Cut a taper

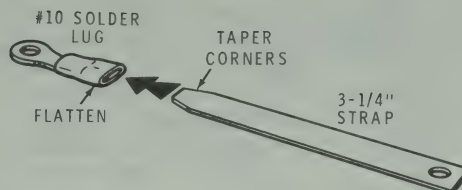

Detail 6-2D


- on the corners of the strap; then form the solder lug around the tapered end of the 3-1/4" strap (without the hole) as shown. As you solder the strap to the lug, be sure the solder completely penetrates **through** the solder lug.
- (✓) In the same manner, install the remaining #10 solder lug on the cut end of the other portion of the 6" strip. Set this shorter strip aside; it will be used later.
- (✓) On the back of C2, form the strap coming from the rear mounting plate as shown. Temporarily remove the outer nut from feedthrough J3 and place the round hole of the strap on the feed-through stud.
- (✓) Place the solder lug on the end of the 3-1/4" strap onto the stud at J3 and secure the two straps finger tight with the nut previously removed.
- (✓) Remove the nut from feedthrough C and place the other end of the 3-1/4" strap over the stud. Replace the nut and tighten it snugly.
- (✓) Tighten the outer nut on J3 snugly.
- (✓) At the rear corner of capacitor C2, form the strap as far forward as possible (to clear J4). Then while holding the strap forward, tighten the strap mounting screw at C2 hole AR.

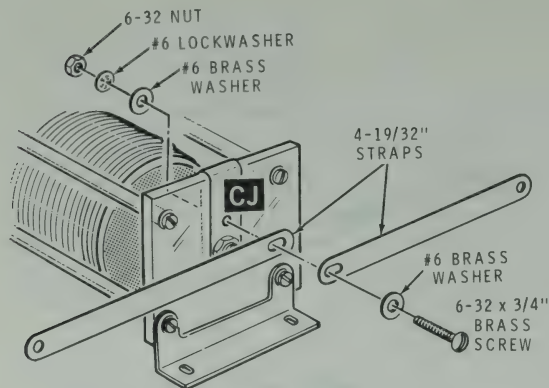

Detail 6-3A

Refer to Pictorial 6-3 (Illustration Booklet, Page 11) for the following steps.

- (✓) Place a shaft coupler halfway onto the metal 2-3/4" extension shaft. Tighten the setscrew onto the shaft.
- (✓) Place a nylon gear onto the end of the shaft as shown. Do not tighten the gear setscrew.
- (✓) Apply some grease on the metal extension shaft, about 1" from the end; then, from the inside of the front panel, position the shaft through bushing T.
- (✓) Refer to Detail 6-3A and, on the rear of the roller inductor, secure the **slotted** ends of two 4-19/32" straps at CJ as shown. Use a 6-32 x 3/4" brass screw, two #6 brass washers, a #6 lockwasher, and a 6-32 nut. Tighten the hardware finger tight. Position the straps as shown in the Pictorial.
- (✓) Position the roller inductor into the chassis, and slide it forward, as far into the shaft coupler as it will go; then tighten the coupler setscrew onto the shaft.

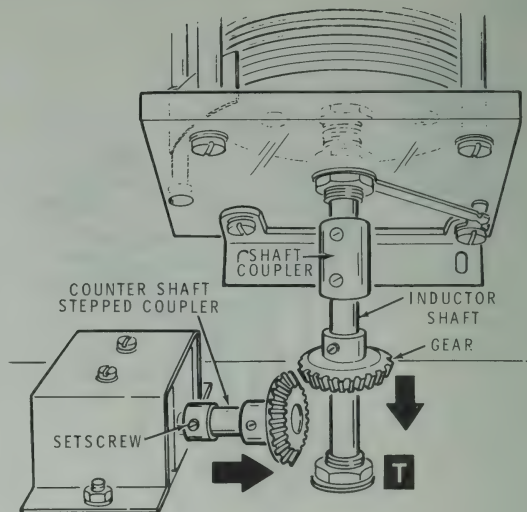

Detail 6-3B

- (✓) Slide the inductor rearward and line up its mounting holes with those in the chassis. Hold the inductor in place. Refer to Detail 6-3B and loosen the setscrew in the counter shaft stepped coupler. As you slide the stepped coupler toward the inductor shaft, slide the gear on the inductor shaft forward until the two gears are equally meshed. Tighten the setscrew in the **stepped coupler**.
- (✓) Slide the nylon gear rearward on the inductor shaft. Then, as you view the inductor from the shaft end, turn the inductor counterclockwise until the inductor roller hits the rear stop.
- (✓) Mount the roller inductor into the chassis at CE, CF, CG, and CH with 6-32 x 3/8" hardware as shown in the inset drawing on Pictorial 6-3. After all the hardware is installed finger tight, push the inductor as far forward as possible; then tighten the mounting hardware.
- (✓) Tighten front panel bushing T.
- (✓) Turn the counter gear, if necessary, so the digits read "0 0 0". Make sure the inductor is turned fully counterclockwise. Then slide the nylon gear on the inductor shaft forward until it meshes with the counter gear. Tighten the setscrew onto the inductor shaft.


Heathkit®

- (✓) On the rear of inductor L1, position one of the straps coming from CJ onto capacitor C2 threaded shaft AN. Secure the strap at AN with a 10-32 nut. Do not tighten the strap on the inductor at this time.

Refer to Pictorial 6-4 (Illustration Booklet, Page 12) for the following steps.

- (✓) Locate the previously prepared narrow strap with a #10 solder lug. Refer to Detail 6-4A and connect the solder lug on this strap to hole AU in the rear mounting plate of capacitor C1 using a 6-32 \times 3/8" hex head screw and a #6 lockwasher. Tighten the screw finger tight.


- (✓) Position the remaining fiberglass shaft (with coupler) into front panel bushing X. Then position capacitor C1 into the chassis and into the rear of the shaft coupler until the shaft is fully seated. Tighten the coupler setscrew onto the capacitor shaft.

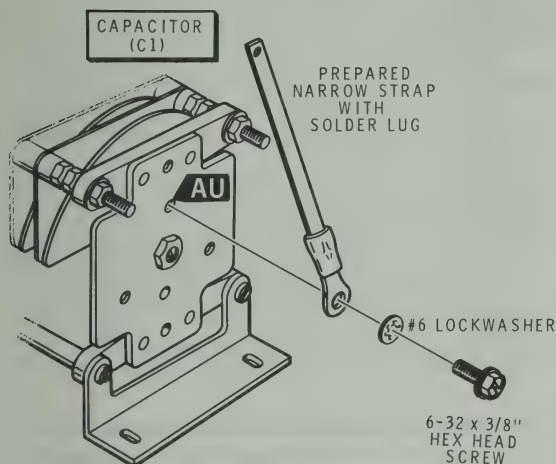


Detail 6-4A


- (✓) Mount capacitor C1 to the chassis at CK and CL with a 6-32 \times 3/8" screw, two #6 brass washers, a #6 lockwasher, and a 6-32 nut at each hole as shown in the inset drawing on Pictorial 6-4. Tighten the hardware finger tight.

- (✓) Refer to Detail 6-4B and, at CN, secure the capacitor to the chassis with a 6-32 \times 3/8" screw, a #6 brass washer, a cable clamp, a #6 lockwasher, and a 6-32 nut. Place the cable shield under the cable clamp, and position the clamp as shown in the Pictorial. Tighten the hardware finger tight.

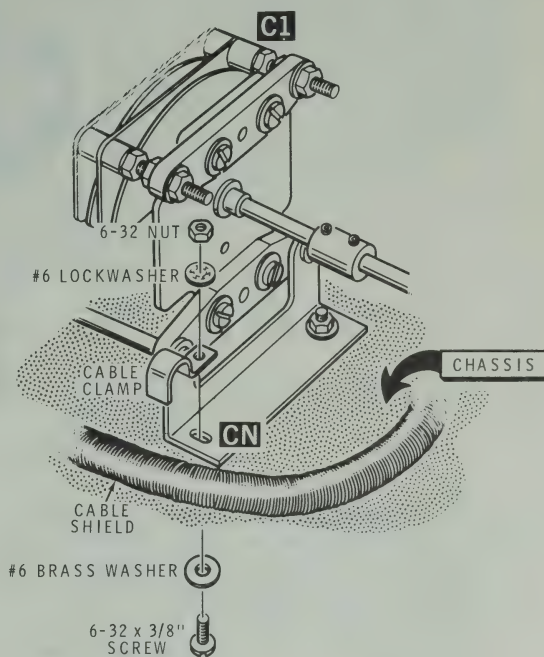

Detail 6-4B



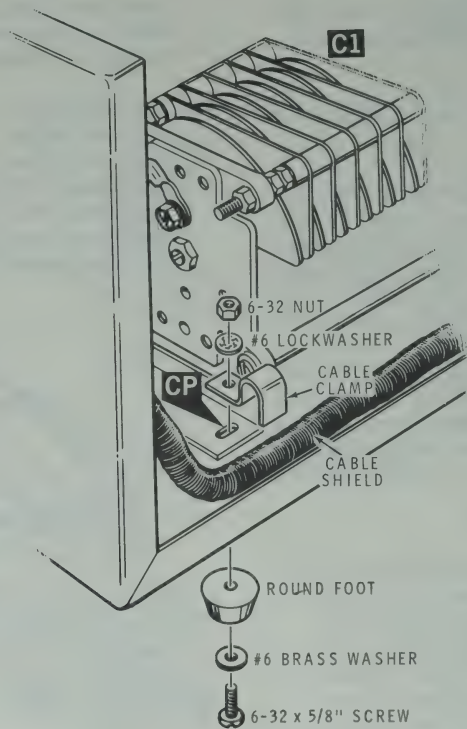


Detail 6-4C

- (✓) Refer to Detail 6-4C and install a round foot at chassis hole at CP using a 6-32 × 5/8" screw, a #6 brass washer, a cable clamp, a #6 lockwasher, and a 6-32 nut. Position the cable under the clamp; then position the clamp as shown in the Pictorial. Tighten the hardware finger tight.
- (✓) Push capacitor C1 as far forward as possible; then tighten the mounting hardware at CK, CL, CN, and CP.

IMPORTANT: Be sure the spiral shield is positioned away from tuning capacitor C1 as shown in Pictorial 6-4.

- (✓) Tighten capacitor strap screw AU.
 - (✓) Position the end of the remaining strap coming from the rear of inductor L1 onto the threaded spacer at AT on capacitor C1. Secure the strap with a 10-32 brass nut.
 - (✓) At the rear of roller inductor L1, hook your middle and index fingers over the two straps going to matching capacitors C1 and C2. As you pull firmly rearward on the straps, tighten the strap mounting screw at Cj. If necessary, after the screw is tight, reform the straps slightly to make sure they are as far as possible from the inductor spacer screws at the upper corners.
- (✓) Tighten front panel shaft bushing X.
 - (✓) Remove the nut from the end of feedthrough stud B and place the hole in the end of the strap


coming from capacitor C1 hole AU over the stud. Tighten the nut onto the stud.

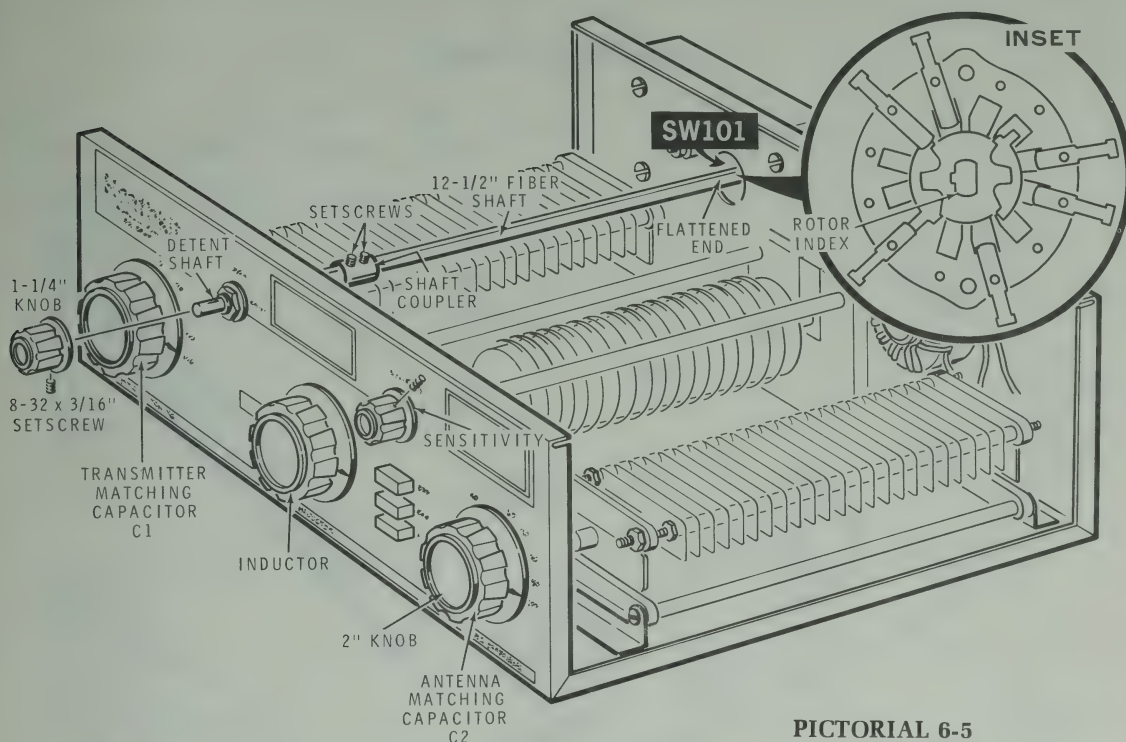

PICTORIAL 6-5

Refer to Pictorial 6-5 for the following steps.

- (✓) Refer to the inset drawing on the Pictorial and be sure SW101 rotor is positioned exactly as shown. **Do not turn the switch** until the coupler has been secured on the detent.
- (✓) Place a shaft coupler onto the round end of the 12-1/2" fiber shaft. Slide the coupler so it is all the way past the end of the shaft.
- (✓) Position the fiber shaft flatted end through the large hole in the rear panel and into the center of switch SW101 in the remote sensor assembly. Align the front end of the shaft with the detent shaft and slide the shaft coupler forward so half the coupler is on each of the two shafts. Tighten both coupler setscrews.
- (✓) Grasp the shaft coupler and turn the shaft to the center of the three switch positions.
- (✓) Turn an 8-32 x 3/16" setscrew into a 1-1/4" knob as shown. Place the knob onto the detent shaft at the upper left of the front panel. Position the knob pointer directly at "COAX 1"; then tighten the setscrew.
- (✓) Turn the SENSITIVITY control fully counterclockwise. Start another setscrew into a 1-1/4" knob. Place the knob on the SENSITIVITY control shaft and turn the knob pointer to the 7-o'clock position. tighten the setscrew.
- (✓) Place a 2" knob on the INDUCTOR shaft and tighten both setscrews.
- (✓) Turn the rotors of both matching capacitors to their fully-meshed positions. Then place a 2" knob onto the shaft of TRANSMITTER MATCHING capacitor C1. Position the knob pointer at "100" and tighten the two knob setscrews.
- (✓) In the same manner, install the remaining 2" knob on the shaft of ANTENNA MATCHING capacitor C2.

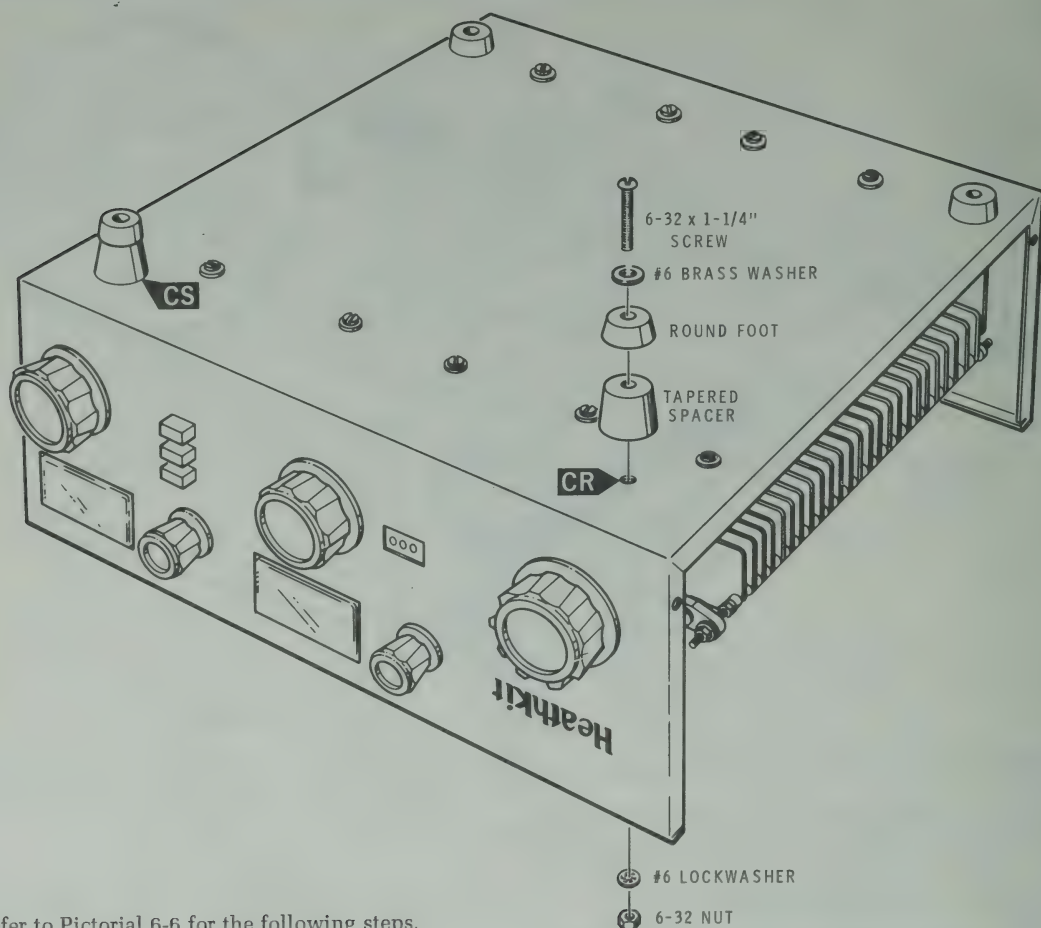

Refer to Pictorial 6-6 for the following steps.

(✓) Position the chassis as shown in the Pictorial.

NOTE: Perform only one of the next two steps.

PICTORIAL 6-6

- (✓) 1. If you wish to have your Antenna Tuner rest level, install only round feet at CR and CS on the bottom of the chassis. Use two 6-32 x 5/8" screws, two #6 brass washers, two #6 lockwashers, and two 6-32 nuts.
- (✓) 2. If you wish to have the front of the chassis tilted upward, mount round feet and tapered spacers at CR and CS on the bottom of the chassis. Use two 6-32 x 1-1/4" screws, two #6 brass washers, two #6 lockwashers and two 6-32 nuts.

This completes the chassis assembly of your Antenna Tuner. Make the following checks before you proceed to "Final Assembly":


1. Make sure all hardware is tight.
2. Make sure there are no unsoldered connections.

FINAL ASSEMBLY

Refer to Pictorial 7-1 for the following steps.

NOTE: When you install the cabinet top on the chassis in the next step, make sure you position it with the wide space as shown.

- () Use eight 6-32 \times 3/8" black screws and mount the cabinet top onto the chassis.

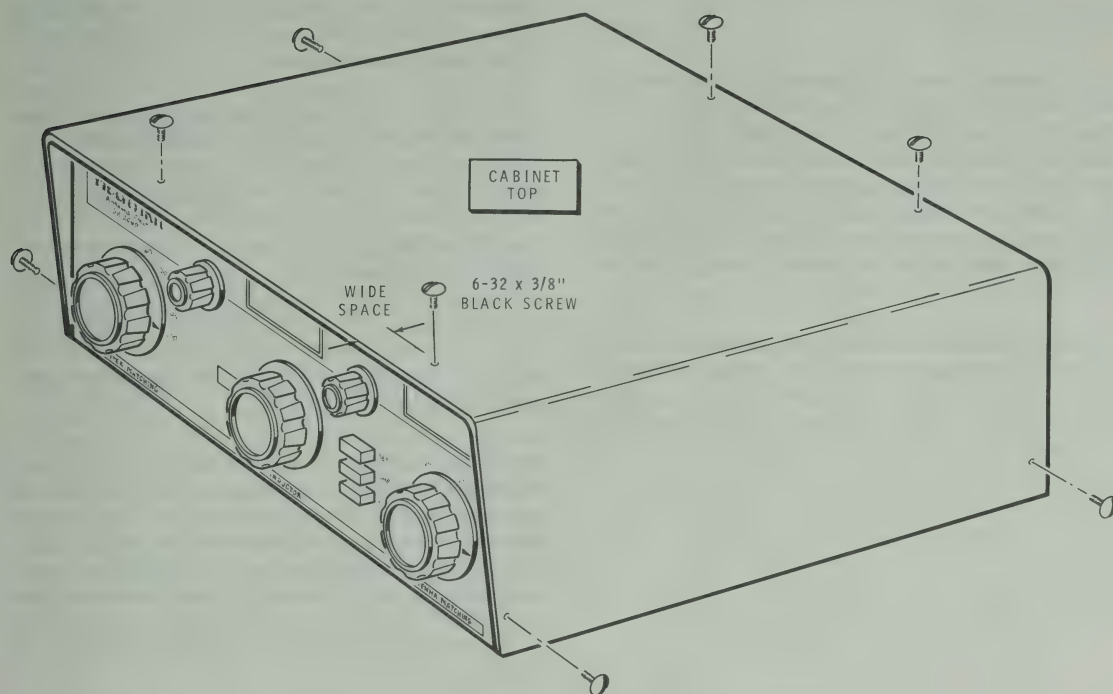

PICTORIAL 7-1

APPLICATIONS AND INSTALLATION

Refer to Pictorial 8-1 (Illustration Booklet, Page 13) for the following steps.

- () Check REF meter M1 to see that the pointer is directly over the left index. If it is not, turn the Meter Adj screw, just below the front panel meter cutout slightly in either direction until the pointer is correctly positioned.
- () In the same manner, if necessary, adjust the pointer position of FWD meter M2 so its pointer is directly over the left index.

APPLICATIONS

This Antenna Tuner will convert a reactive and/or resistive load to a nonreactive, 50-ohm load. You can adjust it to tune out load reactance and, when necessary, transform the load impedance to the required 50-ohm transmitter (or amplifier) output impedance. The Tuner uses a roller inductor along with two variable capacitors to provide an almost unlimited matching range, and features 160-meter through 10-meter coverage without band switching.

A 4-to-1 (balanced-to-unbalanced) balun coil, on the output side of the Antenna Tuner, permits the use of balanced feed lines. You can use the Tuner to match into coaxial lines, random-length end-fed wires, or balanced feeders.

INSTALLATION

Pictorial 8-2 (Illustration Booklet, Page 13) shows a typical fixed-station installation. This Pictorial shows an installation where its internal coaxial switch (SW101) may be used to feed the RF source either to your Antenna Tuner or any one of several 50-ohm antennas or RF loads. If an amplifier is not used, connect the cable from the transmitter's antenna connector directly to the RF input jack on the rear panel of the Antenna Tuner remote sensor.

Use coaxial cable, like RG-8/U, to interconnect the various pieces of equipment. NOTE: Cables should not be longer than necessary.

IMPORTANT: When you use either a single-wire antenna connected to J3 or a balanced feedline connected to J4 and J5, you **MUST** have an open output jack at COAX 1 or COAX 2, and the selector switch on the front panel must be turned to the open jack position. Otherwise, you will have two of your antennas operating in parallel.

A ground post is located on the rear panel of the Antenna Tuner. Connect this ground post to a good earth ground or a water pipe. **Use the shortest and heaviest connection possible.**

Before you use a water pipe ground, inspect the connection around your water meter. Make sure that no plastic or rubber hose connections are used which interrupt electrical continuity to the water supply line. Install a jumper around any insulating water connectors you find. Use heavy copper wire and pipe clamps. It is best to ground all equipment to one point at the operating position; then ground this point as discussed above.

Refer to various publications, such as the ARRL Radio Amateur Handbook, for more information concerning grounds.

OPERATION

Refer to Pictorial 8-3 (Illustration Booklet, Page 14) to identify the front panel meters, switches, controls, and the counter readout. A description of the function of each is included. Also, refer to Pictorial 8-2 for any rear panel connections.

EXCITER TUNE-UP

The final stage of some transmitters must be tuned up before they can be placed on the air. **It is important that you tune up an exciter on a “dummy load” before you use it with your Antenna Tuner.** You can use any load that has a constant, resistive impedance of 50 ohms that can dissipate the necessary power for a reasonable length of time. As an example, the Heathkit “Cantenna” is a satisfactory load. **NOTE: Do not use light bulbs as a “dummy load.”** Their resistance varies with the current, and their reactance varies with frequency.

COUPLER TUNING

NOTE: When you turn the roller inductor, be careful that you do not turn it past its end stops. This could cause the roller contact to jump off the wire turns on the inductor.

This part of the “Operation” section includes the procedure for using your Antenna Tuner with various antenna systems. The “Preset Chart” on Page 57 gives the approximate settings for the Antenna Tuner controls when a 50 Ω resistive RF dummy load is used. Be sure to record the settings of both variable capacitor knobs and the counter so you can preset the controls the next time you use a particular band. For your convenience, a “Logging Scale” is included on Page 56 of this Manual.

NOTE: The “ARRL Antenna Book” is readily available and includes comprehensive information on transmission lines and antennas. You can purchase other similar radio amateur handbooks and some are available in public libraries.

Before you proceed, make sure you connect your transmitting equipment as shown in Pictorial 8-2. **NOTE:** If you are not using an amplifier, connect the coaxial cable from the exciter’s RF output connector directly to the input connector of your Tuner remote sensor RF Input at J6.

IMPORTANT:

1. During the tuning procedure, apply only enough RF power from the exciter to get a meaningful reading on FWD meter M2 in its most sensitive position. When you have made coarse adjustments to the Antenna Tuner, as indicated by minimum reflected power, you may increase the power from the exciter. At this time, you can make final adjustments to the Antenna Tuner.
2. When you tune your exciter, be **sure** to observe the duty cycle limitations, if any.
3. When you use a single- or double-wire feedline connected to feedthrough connectors J3, or J4 and J5, you **must** have no coaxial feedline connected to either the COAX 1 or COAX 2 jacks, J1 or J2, on the back of the remote sensor. You then must turn feedline switch SW101 to an open connector position. If you do not follow this procedure, you will have two feedlines in parallel.

IMPORTANT: Any time you are transmitting using the COAX 1 or COAX 2 switch positions and respective feedlines, there will also be a high RF voltage on feedthrough connectors J3 and J4 if the shorting bar is connected between these two. In this case, there also will be a high RF voltage on J5.

COAXIAL-FED ANTENNAS

An antenna fed with a coaxial line, such as a beam antenna or a centerfed dipole, can easily be matched with your Antenna Tuner to provide a good match to the transmitter across the entire band. This will be particularly beneficial when, for example, you use an 80-meter dipole that has been cut for a particular portion of the band.

For coax-to-coax feeder matching, use the following tuning procedure.

1. Preset your Antenna Tuner controls as follows:

TRANSMITTER MATCHING (C1)—	}	Refer to the "Preset Chart" on Page 59 for approximate settings.
INDUCTOR (L1)—		
ANTENNA MATCHING (C2)—		

2. Connect the antenna feed line to COAX 1 connector J1, or to COAX 2 connector J2 (or to BYPASS jack J7 for a 50-ohm, nonreactive dummy load) on the Antenna Tuner rear panel.
3. Set antenna switch SW101 to the position of the connector you selected in Step 2.
4. Set FWD-SET switch SW1 in the FWD (out) position to measure the forward power on FWD meter M2.
5. Set HIGH-LOW switch SW3, to LOW (in).
6. Set REF-SWR switch SW2 to SWR (in).
7. Set SENSITIVITY control R3 to the most sensitive position (fully clockwise).
8. Turn the exciter power on.
9. With the exciter in either the tune or CW mode, advance the exciter's carrier level (or power output) control for an on-scale reading on REF meter M1.
10. Adjust L1, the roller inductor, until there is a drop in the SWR reading on REF meter M1.
11. Readjust capacitors C1 and C2, along with inductor L1, until you obtain the lowest SWR reading.

NOTE: With many antenna systems, you can obtain several different matching combinations. **Always use the matching setting that uses the most capacitance for C1 and C2, as maximum capacitance provides the best harmonic attenuation.**

12. Advance the exciter's carrier level (power output) for full power output. Then readjust C1, C2 and L1 for minimum reflected power. Adjust the SENSITIVITY control counterclockwise as necessary.

This completes the tuning procedure for coaxial-fed antennas. You can now use an amplifier without retuning the Antenna Tuner.

SINGLE-WIRE ANTENNAS

NOTE: If possible, use an end-fed quarter-wavelength antenna or an odd multiple of a quarter-wavelength. Such an antenna will have low impedance and will reduce the chances of high RF voltages appearing on the Antenna Tuner or associated equipment.

For end-fed wires, random-length wires or Windom type antennas, use the following tuning procedure.

1. Preset your Antenna Tuner controls as follows:

TRANSMITTER MATCHING (C1)—	}	Refer to the "Preset Chart" on Page 59 for approximate settings.
INDUCTOR (L1)—		
ANTENNA MATCHING (C2)—		

2. Connect the antenna to SINGLE WIRE connector J3 on the Antenna Tuner rear panel.
3. Be sure either the COAX 1 or COAX 2 jack (J1 or J2) is open. Turn antenna switch to SW101 to the open jack position.
4. Set FWD-SET switch SW1 in the FWD (out) position to measure forward power on FWD meter M2.
5. Set HIGH-LOW switch SW3 to LOW (in).

6. Set SENSITIVITY control R3 to the most sensitive position (fully clockwise).
7. Turn the exciter power on.
8. With the exciter in either the tune or CW mode, advance the exciter's carrier level (or power output) control for an on-scale reading on the REF meter M1.
9. Adjust L1, the roller inductor, until there is a drop in the reflected reading on meter M1.
10. Readjust capacitors C1 and C2, along with inductor L1, until the lowest SWR reading is obtained.

NOTE: With many antenna systems, you can obtain several different matching combinations. **Always use the matching setting that uses the most capacitance for C1 and C2, as maximum capacitance provides the best harmonic attenuation.**

11. Advance the exciter's carrier level (power output) control for full power. Then readjust C1, C2, and L1 for minimum reflected power.

This completes the tuning procedure for single-wire antennas. You can now use an amplifier without retuning the Antenna Tuner.

BALANCED FEED LINE ANTENNAS

For antennas using balanced feeders, use the following tune-up procedure.

1. Preset your Antenna Tuner controls as follows:

TRANSMITTER
MATCHING (C1)—

INDUCTOR (L1)—

ANTENNA
MATCHING (C2)—

} Refer to the "Preset Chart" on Page 59 for approximate settings.

2. Connect the shorting bar between connectors J3 and J4 on the rear panel of the Antenna Tuner.
3. Be sure either the COAX 1 or COAX 2 jack (J1 or J2) is open. Turn the antenna switch to the open jack position.
4. Connect the antenna feed line to BALANCED FEED LINE connectors J4 and J5.
5. Set HIGH-LOW switch SW3 to LOW (in).
6. Set the FWD-SET switch to FWD (out) to measure forward power on meter M2.
7. Set SENSITIVITY control R3 to the most sensitive position (fully clockwise).
8. Turn the exciter power on.
9. With the exciter in either the tune or CW mode, advance the exciter's carrier level (or power output) control for an on-scale reading on REF meter M1.
10. Adjust L1, the roller inductor, until there is a drop in the reading on REF meter M1.
11. Readjust capacitors C1 and C2, along with inductor L1, until you obtain the lowest SWR reading.

NOTE: With many antenna systems, you can obtain several different matching combinations. **Always use the matching setting that uses the most capacitance for C1 and C2, as maximum capacitance provides the best harmonic attenuation.**

12. Advance the exciter's carrier level (power output) control for full power. Then readjust C1, C2, and L1 for minimum reflected power. Adjust the SENSITIVITY control counter clockwise as necessary.

This completes the tuning procedure for balanced feed line antennas. You can now use an amplifier without retuning the Antenna Tuner.

TYPICAL OPERATING CHARACTERISTICS

- A severe mismatch may cause a transmitter to become unstable until the SWR is reduced to a low value (1.5:1 or better). This is especially true of broadband solid-state transmitters. However, this can also occur with tube-type tuned transmitters.
- You may find that you have no reflected power, as indicated by your SWR indicator, at a number of settings of the roller inductor and the capacitors for some band/antenna combinations. **Always use the matching setting that uses the most capacitance for the variable capacitors.**

IN CASE OF DIFFICULTY

If your Antenna Tuner does not operate properly, make the following checks.

1. Recheck the wiring. Trace each lead with a colored pencil on the Pictorial as you check it. It is frequently helpful to have a friend check your work. Someone who is not familiar with the unit may notice something consistently overlooked by the kit builder.
2. About 90% of the kits that are returned to the Heath Company for service do not function properly due to poor connections and soldering. Therefore, you can eliminate many troubles by reheating all connections to make sure they are soldered as described in the "Soldering" instructions on Page 5.
3. Check each capacitor value. Make sure that a capacitor of the correct value is installed at each capacitor location.
4. Check each resistor value carefully. Be sure in each step that the proper part has been wired into the circuit, as shown in the Pictorials.
5. Be sure all the wires and leads have been trimmed as close as possible to their connecting points.
6. Check for bits of solder, wire ends, or other foreign matter which may be lodged in the wiring.
7. The antenna you use should be insulated along its entire length from any contact with any parts of buildings, trees, etc. Keep the antenna as far as possible from all objects for maximum operation efficiency.
8. If, for any reason, the meters fail to register, check for the following conditions:
 - a. Shorting wire(s) removed from the meter lugs.
 - b. Sensitivity control connections correctly wired and well soldered.
 - c. Sensor cable connections at switch SW3 all correctly wired and well soldered.
 - d. Check to make sure that there is an RF input to the remote sensor, and that there is an output.

NOTE: In an extreme case where you are unable to resolve a difficulty, refer to the "Customer Service" information inside the rear cover of this Manual. The Warranty is located inside the front cover.

SPECIFICATIONS

Frequency Range (continuous tuning)	1.8 to 30 MHz.
Input Power Capability (full legal limit)	
SSB	2000 watts (peak).
CW	1000 watts.
Input Impedance	50 ohms.
Impedance Transformation	4:1 balun (balanced to unbalanced).
Output Impedance	Wide range
Meter Functions	Forward and Reflected average power, and SWR.
Meter Ranges	
Forward (2 ranges)	Low — 0-200 watts. High — 0-2000 watts.
Reflected (3 scales)	Low — 0-50 watts. High — 0-500 watts. SWR — 1:1 to 3:1
Wattmeter Accuracy (full scale)	
200 W and 2000 W (FWD), 500 W (REF)	±5% (AVG).
50 W (REF)	±7.5% (AVG).
Insertion SWR	Less than 1.1:1.
Overall Dimensions	14-1/2" x 13-7/8" x 5-3/4" (36.8 x 35.2 x 14.6 cm).
Net Weight	15-1/2 lbs (7.1 kg).

The Heath Company reserves the right to discontinue products and to change specifications at any time without incurring any obligation to incorporate new features in products previously sold.

CIRCUIT DESCRIPTION

Refer to the fold-in Schematic Diagram while you read this "Circuit Description."

TUNER CIRCUIT

The Antenna Tuner is an adjustable RF transformer that will match an unknown load presented by an antenna and its feedline to the required 50-ohm transmitter impedance.

Coupling capacitor C2 modifies the load impedance fed back to the tuned circuit formed by capacitor C1 and inductor L1. The total resonant impedance across the tuned circuit depends on the L/C ratio of C1 and L1, and the load impedance as transformed by C2. Capacitor C1 performs capacitive tapping which results in a 50-ohm impedance at RF input connector J6.

The reactive loads at switched output connectors J1, J2, and J7 are compensated for as you adjust C1 and C2 to resonance.

A 4:1 (balanced-to-unbalanced) balun coil, T1, is used for balanced line operation.

METER OPERATION

From input jack J6 on the remote sensor, the conductor is routed through toroid coil L101, through the contacts of coaxial switch SW101, and to either the bypass output at J7, or through the Tuner circuits to outputs J1, J2, or to the feedthrough single- or double-wire outputs at J3, J4, and J5.

L101 is a current pickup element for both the forward and reflected power which passes through the remote sensor. A transmitted signal passing through the sensor induces a voltage in the toroid coil. This voltage is directly proportional to the amount of RF current. A voltage sampled directly from the transmission line is summed with the voltage at L101. The sum of the voltages is then rectified by diode D102 and filtered by capacitor C104. The sensor is factory calibrated to within 5% accuracy by control R106 for the 0 — 2000-watt circuit and by control R107 for the 0 — 200-watt circuit.

The "out-of-phase" (reflected) current-induced voltage that was summed with the sampled voltage is rectified by diode D101 and filtered by capacitor C101. With a very good load, one with less than 1.05:1 VSWR, the two voltages will be about equal and out of phase and no reflected voltage will register in the reflected circuits. Reflected power is factory calibrated by control R104 for the 0 — 50-watt scale and by R105 for the 0 — 500-watt scale.

The calibrated voltages from the remote sensor are routed through a 5-wire shielded cable to switches SW1, SW2, SW3, and SENSITIVITY control R3.

IMPORTANT: The remote sensor is factory aligned and calibrated; tampering with its components may void the Warranty on your Antenna Tuner.

Switching Circuits

NOTE: The forward and reflected circuits are virtually identical. In the following discussion, we will explain the operation of the forward circuits. Where differences exist between the basic operation of the two circuits, further details will be supplied.

The forward signal from the remote sensor is coupled through LOW-HIGH switch SW3. If the output of the transmitter is known to be less than 200 watts, switch SW3 should be set to the LOW (in) position. If the power is greater than 200 watts, set switch SW3 to HIGH (out).

Signals from SW3 are routed directly to SET-FWD switch SW1. When SW1 is in the SET (in) position, the forward (FWD) meter is temporarily disconnected from the circuit. The low-current input from the sensor is coupled directly through SW1, through Sensitivity control R1, to the contacts of SWR-REF switch SW2. The SET position of SW1 is used only in conjunction with SW2 when SW2 is in the SWR position. At that time, the REF (reflected) meter "Set" index is used to calibrate the meter for SWR readings.

When switch SW1 is in the FWD (out) position, the FWD meter is again enabled to indicate forward power, while switch SW2, in the SWR position, indicates the amount of standing wave apparent at the point the sensor is inserted in the transmission line. When SW2 is at the REF (out) position, the power reflected through the transmission line from the antenna, dummy load, etc., is indicated on the REF meter in watts.

When switch SW1 is in the FWD position, the signals coupled from SW3 are direct-coupled to the FWD and REF meters.

COAXIAL SWITCH (SW101)


The coaxial switch will select any of three outputs to antenna feedlines or dummy loads. When this switch is in the Bypass position, signals are routed through the remote sensor and directly out of the Tuner,

bypassing the tuner load-matching function. This will peak your exciter into a 50-ohm nonreactive dummy load without radiating the signal.

The other coaxial jacks are used for feedlines to tri-banders, center-fed doublet antennas, etc. In addition, the output signal is simultaneously fed internally to the rear panel feedthroughs at J3, J4, and J5. These coaxial output and feedthrough jacks are connected in **parallel**, and if you have single-wire or double-wire feedlines connected at J3, J4, and J5 (with the shorting bar properly positioned), you must have at least one open coaxial jack at J1 or J2, and your coaxial switch must be turned to the open coax connector. Otherwise, you will be attempting to radiate signals on two different antennas at the same time.

All input signals, other than those routed to Bypass jack J7, are routed through the meter **and** the tuner circuits. Those routed to J7 will affect only the meter circuits.

SWR CHART

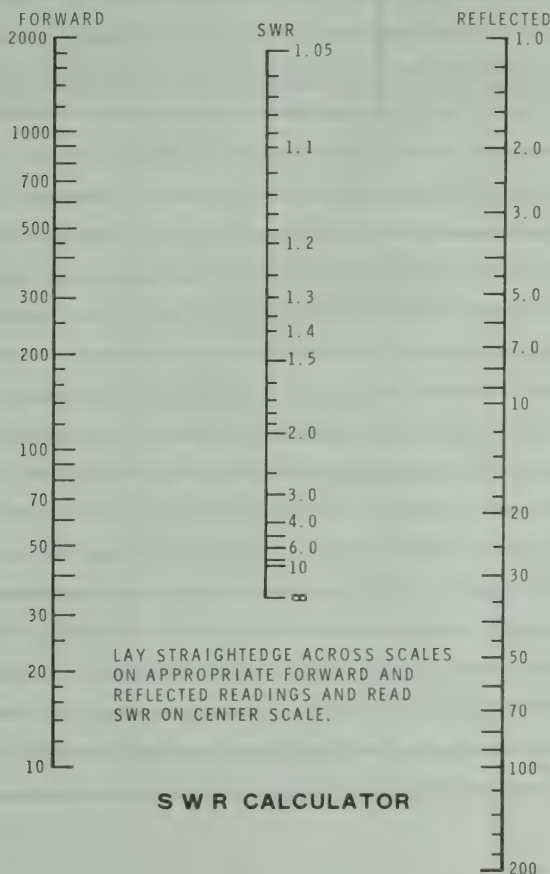

PICTORIAL 9-1

LOGGING SCALE

[illegible]

PRESET CHART

FREQUENCY (IN MHZ)	TRANSMITTER MATCHING	INDUCTOR	ANTENNA MATCHING
1.800	61	376	57
1.900	57	364	54
2.000	54	352	49
3.500	50	146	50
3.750	50	134	49
4.000	50	123	48
7.000	50	58	50
7.150	50	56	50
7.300	50	55	50
14.000	48	26	47
14.100	48	26	44
14.350	45	26	42
21.000	52	16	40
21.200	48	16	38
21.450	43	15	33
28.000	50	18	30
29.000	48	17	28
29.700	47	16	37

FOR PARTS REQUESTS ONLY

- Be sure to follow instructions carefully.
- Use a separate letter for all correspondence.
- Please allow 10 - 14 days for mail delivery time.

DO NOT WRITE IN THIS SPACE

INSTRUCTIONS

- Please print all information requested.
- Be sure you list the correct **HEATH** part number exactly as it appears in the parts list.
- If you wish to prepay your order, mail this card and your payment in an envelope. Be sure to include 10% (25¢ minimum, \$3.50 maximum) for insurance, shipping and handling. Michigan residents add 4% tax.

Total enclosed \$ _____

- If you prefer COD shipment, check the COD box and mail this form. COD ☐

NAME _____

ADDRESS _____

CITY _____

STATE _____ ZIP _____

The information requested in the next two lines is not required when purchasing nonwarranty replacement parts, but it can help us provide you with better products in the future.

Model # _____ Invoice # _____
Date _____ Location _____
Purchased _____ Purchased _____

LIST HEATH PART NUMBER	QTY.	PRICE EACH	TOTAL PRICE

TOTAL FOR PARTS

HANDLING AND SHIPPING

MICHIGAN RESIDENTS ADD 4% TAX

TOTAL AMOUNT OF ORDER

SEND TO: **HEATH COMPANY**
BENTON HARBOR
MICHIGAN 49022
ATTN: PARTS REPLACEMENT

Phone (Replacement parts only): 616 982-3571

THIS FORM IS FOR U.S. CUSTOMERS ONLY
OVERSEAS CUSTOMERS SEE YOUR DISTRIBUTOR

FOR PARTS REQUESTS ONLY

- Be sure to follow instructions carefully.
- Use a separate letter for all correspondence.
- Please allow 10 - 14 days for mail delivery time.

DO NOT WRITE IN THIS SPACE

INSTRUCTIONS

- Please print all information requested.
- Be sure you list the correct **HEATH** part number exactly as it appears in the parts list.
- If you wish to prepay your order, mail this card and your payment in an envelope. Be sure to include 10% (25¢ minimum, \$3.50 maximum) for insurance, shipping and handling. Michigan residents add 4% tax.

Total enclosed \$ _____

- If you prefer COD shipment, check the COD box and mail this form. COD ☐

NAME _____

ADDRESS _____

CITY _____

STATE _____ ZIP _____

The information requested in the next two lines is not required when purchasing nonwarranty replacement parts, but it can help us provide you with better products in the future.

Model # _____ Invoice # _____
Date _____ Location _____
Purchased _____ Purchased _____

LIST HEATH PART NUMBER	QTY.	PRICE EACH	TOTAL PRICE

TOTAL FOR PARTS

HANDLING AND SHIPPING

MICHIGAN RESIDENTS ADD 4% TAX

TOTAL AMOUNT OF ORDER

SEND TO: **HEATH COMPANY**
BENTON HARBOR
MICHIGAN 49022
ATTN: PARTS REPLACEMENT

Phone (Replacement parts only): 616 982-3571

THIS FORM IS FOR U.S. CUSTOMERS ONLY
OVERSEAS CUSTOMERS SEE YOUR DISTRIBUTOR

CUT ALONG DOTTED LINE

CUSTOMER SERVICE

REPLACEMENT PARTS

Please provide complete information when you request replacements from either the factory or Heath Electronic Centers. Be certain to include the **HEATH** part number exactly as it appears in the parts list.

ORDERING FROM THE FACTORY

Print all of the information requested on the parts order form furnished with this product and mail it to Heath. For telephone orders (parts only) dial 616 982-3571. If you are unable to locate an order form, write us a letter or card including:

- Heath part number.
- Model number.
- Date of purchase.
- Location purchased or invoice number.
- Nature of the defect.
- Your payment or authorization for COD shipment of parts not covered by warranty.

Mail letters to: Heath Company
Benton Harbor
MI 49022
Attn: Parts Replacement

Retain original parts until you receive replacements. Parts that should be returned to the factory will be listed on your packing slip.

OBTAINING REPLACEMENTS FROM HEATH ELECTRONIC CENTERS

For your convenience, "over the counter" replacement parts are available from the Heath Electronic Centers listed in your catalog. Be sure to bring in the original part and purchase invoice when you request a warranty replacement from a Heath Electronic Center.

TECHNICAL CONSULTATION

Need help with your kit? — Self-Service? — Construction? — Operation? — Call or write for assistance. you'll find our Technical Consultants eager to help with just about any technical problem except "customizing" for unique applications.

The effectiveness of our consultation service depends on the information you furnish. Be sure to tell us:

- The Model number and Series number from the blue and white label.
- The date of purchase.
- An exact description of the difficulty.
- Everything you have done in attempting to correct the problem.

Also include switch positions, connections to other units, operating procedures, voltage readings, and any other information you think might be helpful.

Please do not send parts for testing, unless this is specifically requested by our Consultants.

Hints: Telephone traffic is lightest at midweek — please be sure your Manual and notes are on hand when you call.

Heathkit Electronic Center facilities are also available for telephone or "walk-in" personal assistance.

REPAIR SERVICE

Service facilities are available, if they are needed, to repair your completed kit. (Kits that have been modified, soldered with paste flux or acid core solder, cannot be accepted for repair.)

If it is convenient, personally deliver your kit to a Heathkit Electronic Center. For warranty parts replacement, supply a copy of the invoice or sales slip.

If you prefer to ship your kit to the factory, attach a letter containing the following information directly to the unit:

- Your name and address.
- Date of purchase and invoice number.
- Copies of all correspondence relevant to the service of the kit.
- A brief description of the difficulty.
- Authorization to return your kit COD for the service and shipping charges. (This will reduce the possibility of delay.)

Check the equipment to see that all screws and parts are secured. (Do not include any wooden cabinets or color television picture tubes, as these are easily damaged in shipment. Do not include the kit Manual.) Place the equipment in a strong carton with at least **THREE INCHES** of *resilient* packing material (shredded paper, excelsior, etc.) on all sides. Use additional packing material where there are protrusions (control sticks, large knobs, etc.). If the unit weighs over 15 lbs., place this carton in another one with 3/4" of packing material between the two.


Seal the carton with reinforced gummed tape, tie it with a strong cord, and mark it "Fragile" on at least two sides. Remember, the carrier will not accept liability for shipping damage if the unit is insufficiently packed. Ship by prepaid express, United Parcel Service, or insured Parcel Post to:

Heath Company
Service Department
Benton Harbor, Michigan 49022



HEATH COMPANY • BENTON HARBOR, MICHIGAN
THE WORLD'S FINEST ELECTRONIC EQUIPMENT IN KIT FORM

LITHO IN U.S.A.

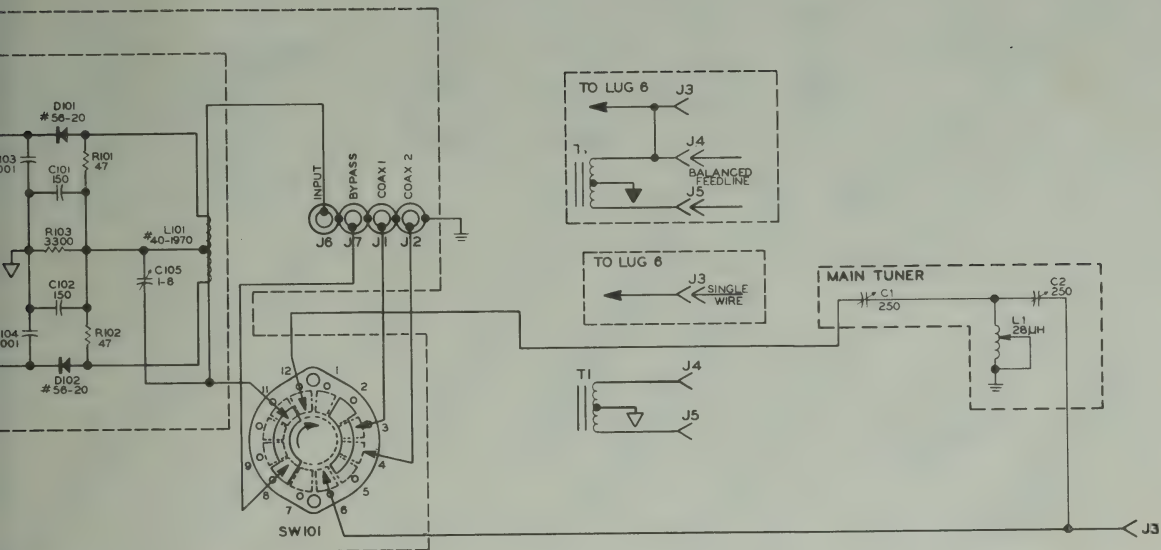





HEATH COMPANY • BENTON HARBOR, MICHIGAN
THE WORLD'S FINEST ELECTRONIC EQUIPMENT IN KIT FORM

LITHO IN U.S.A.

ILLUSTRATION BOOKLET

Part of 595-2514



PARTS PICTORIAL

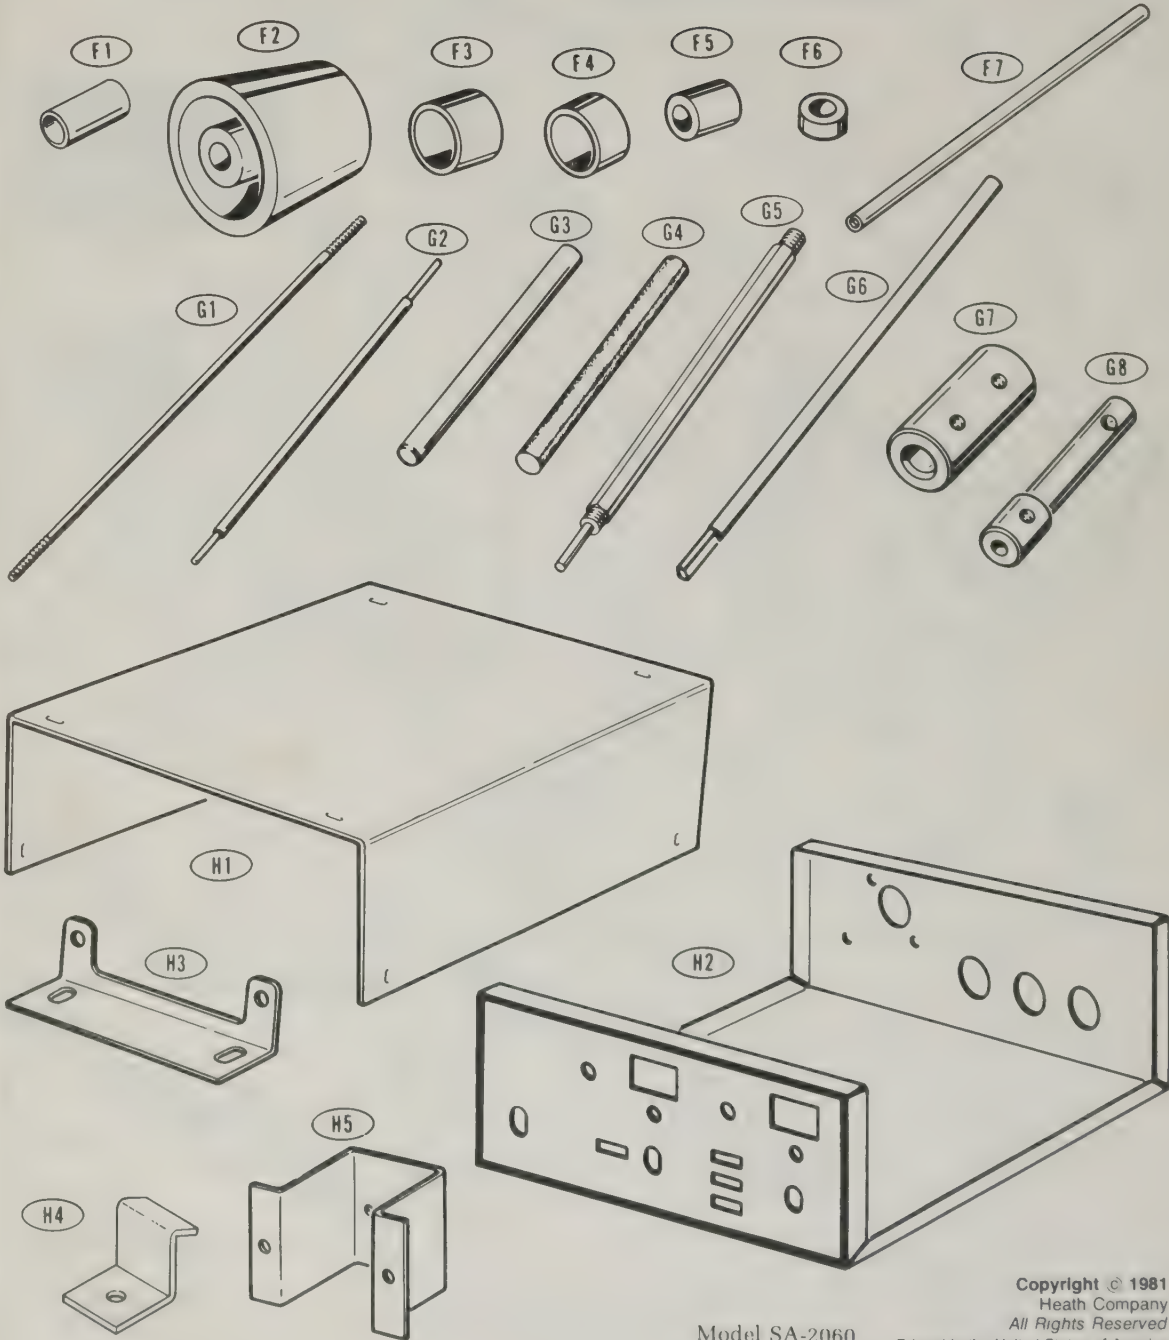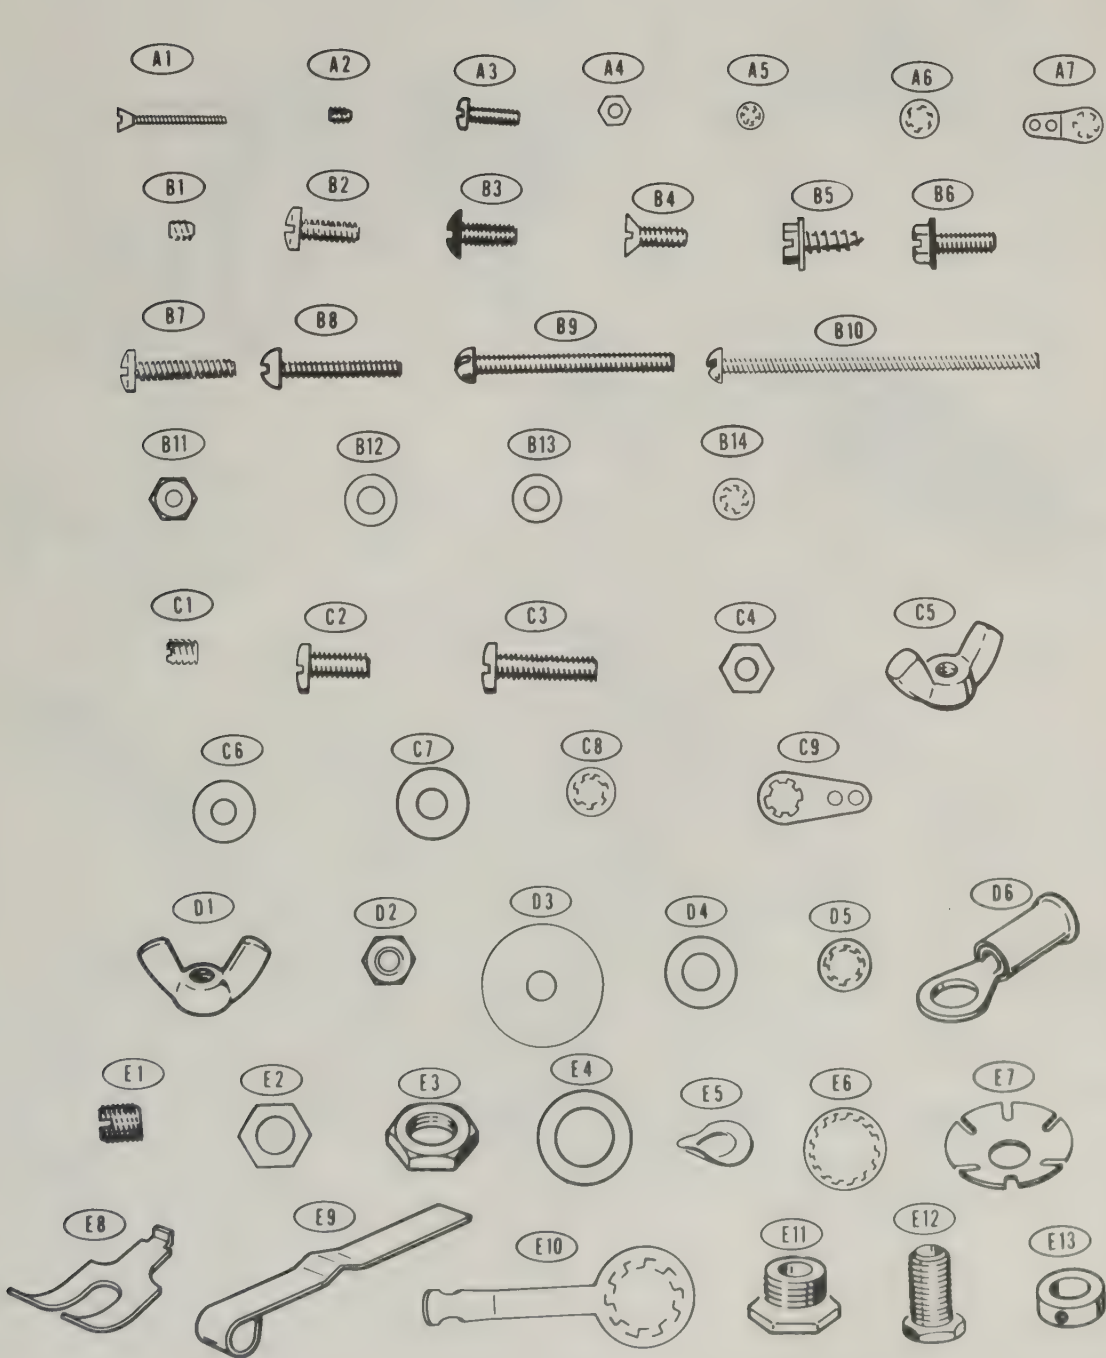

Model SA-2060




Copyright © 1981
Heath Company
All Rights Reserved
Printed in the United States of America


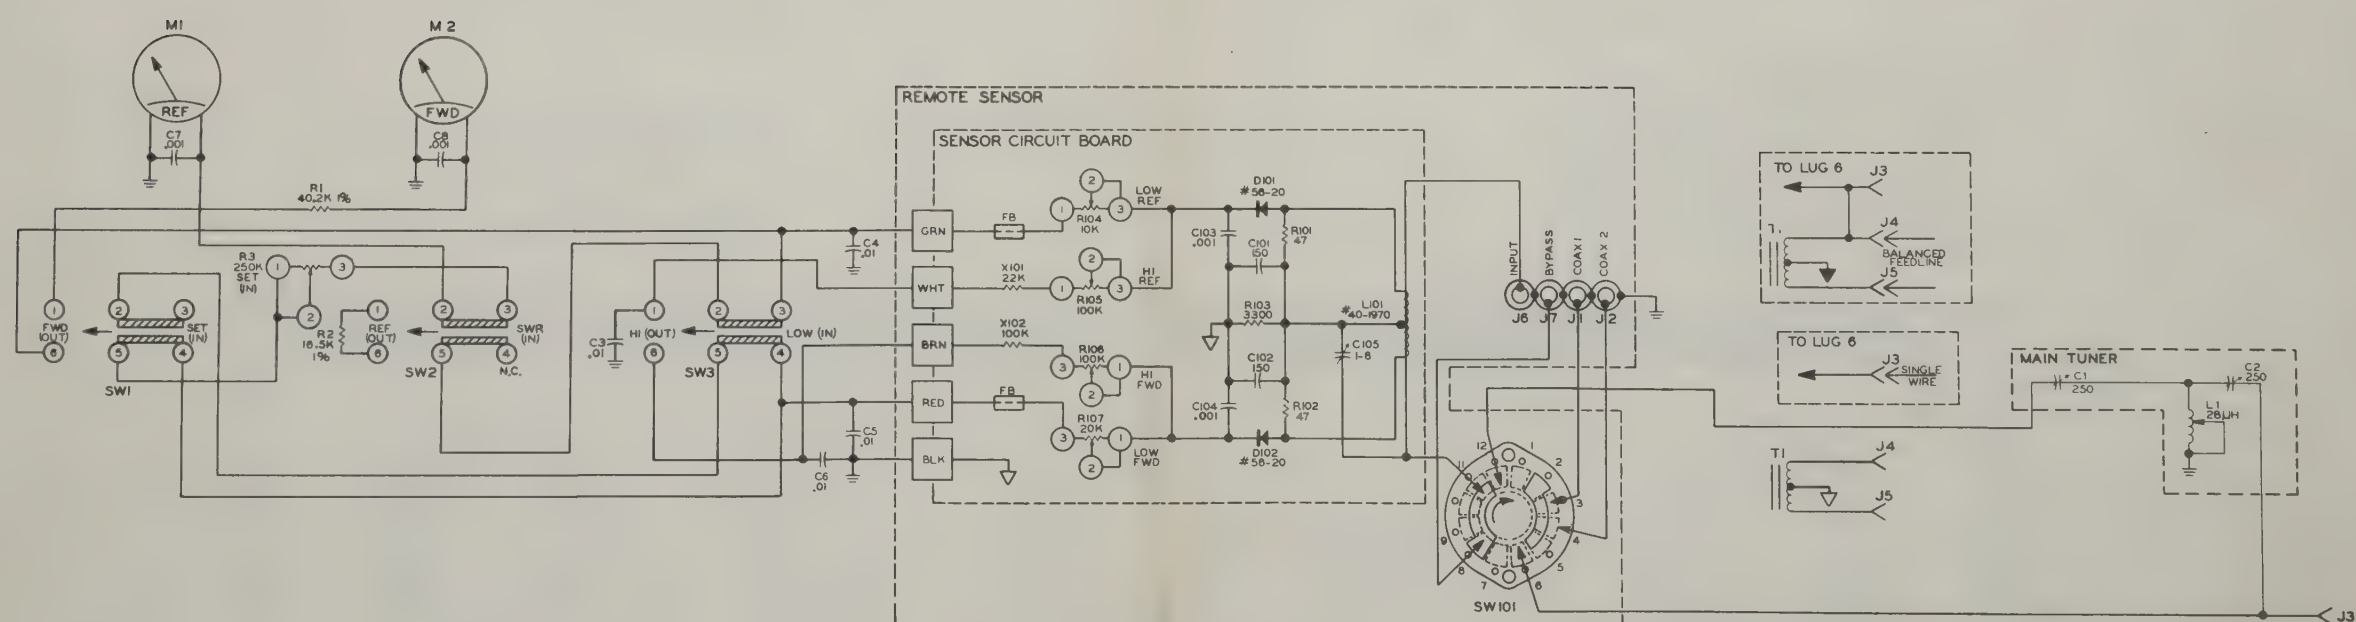
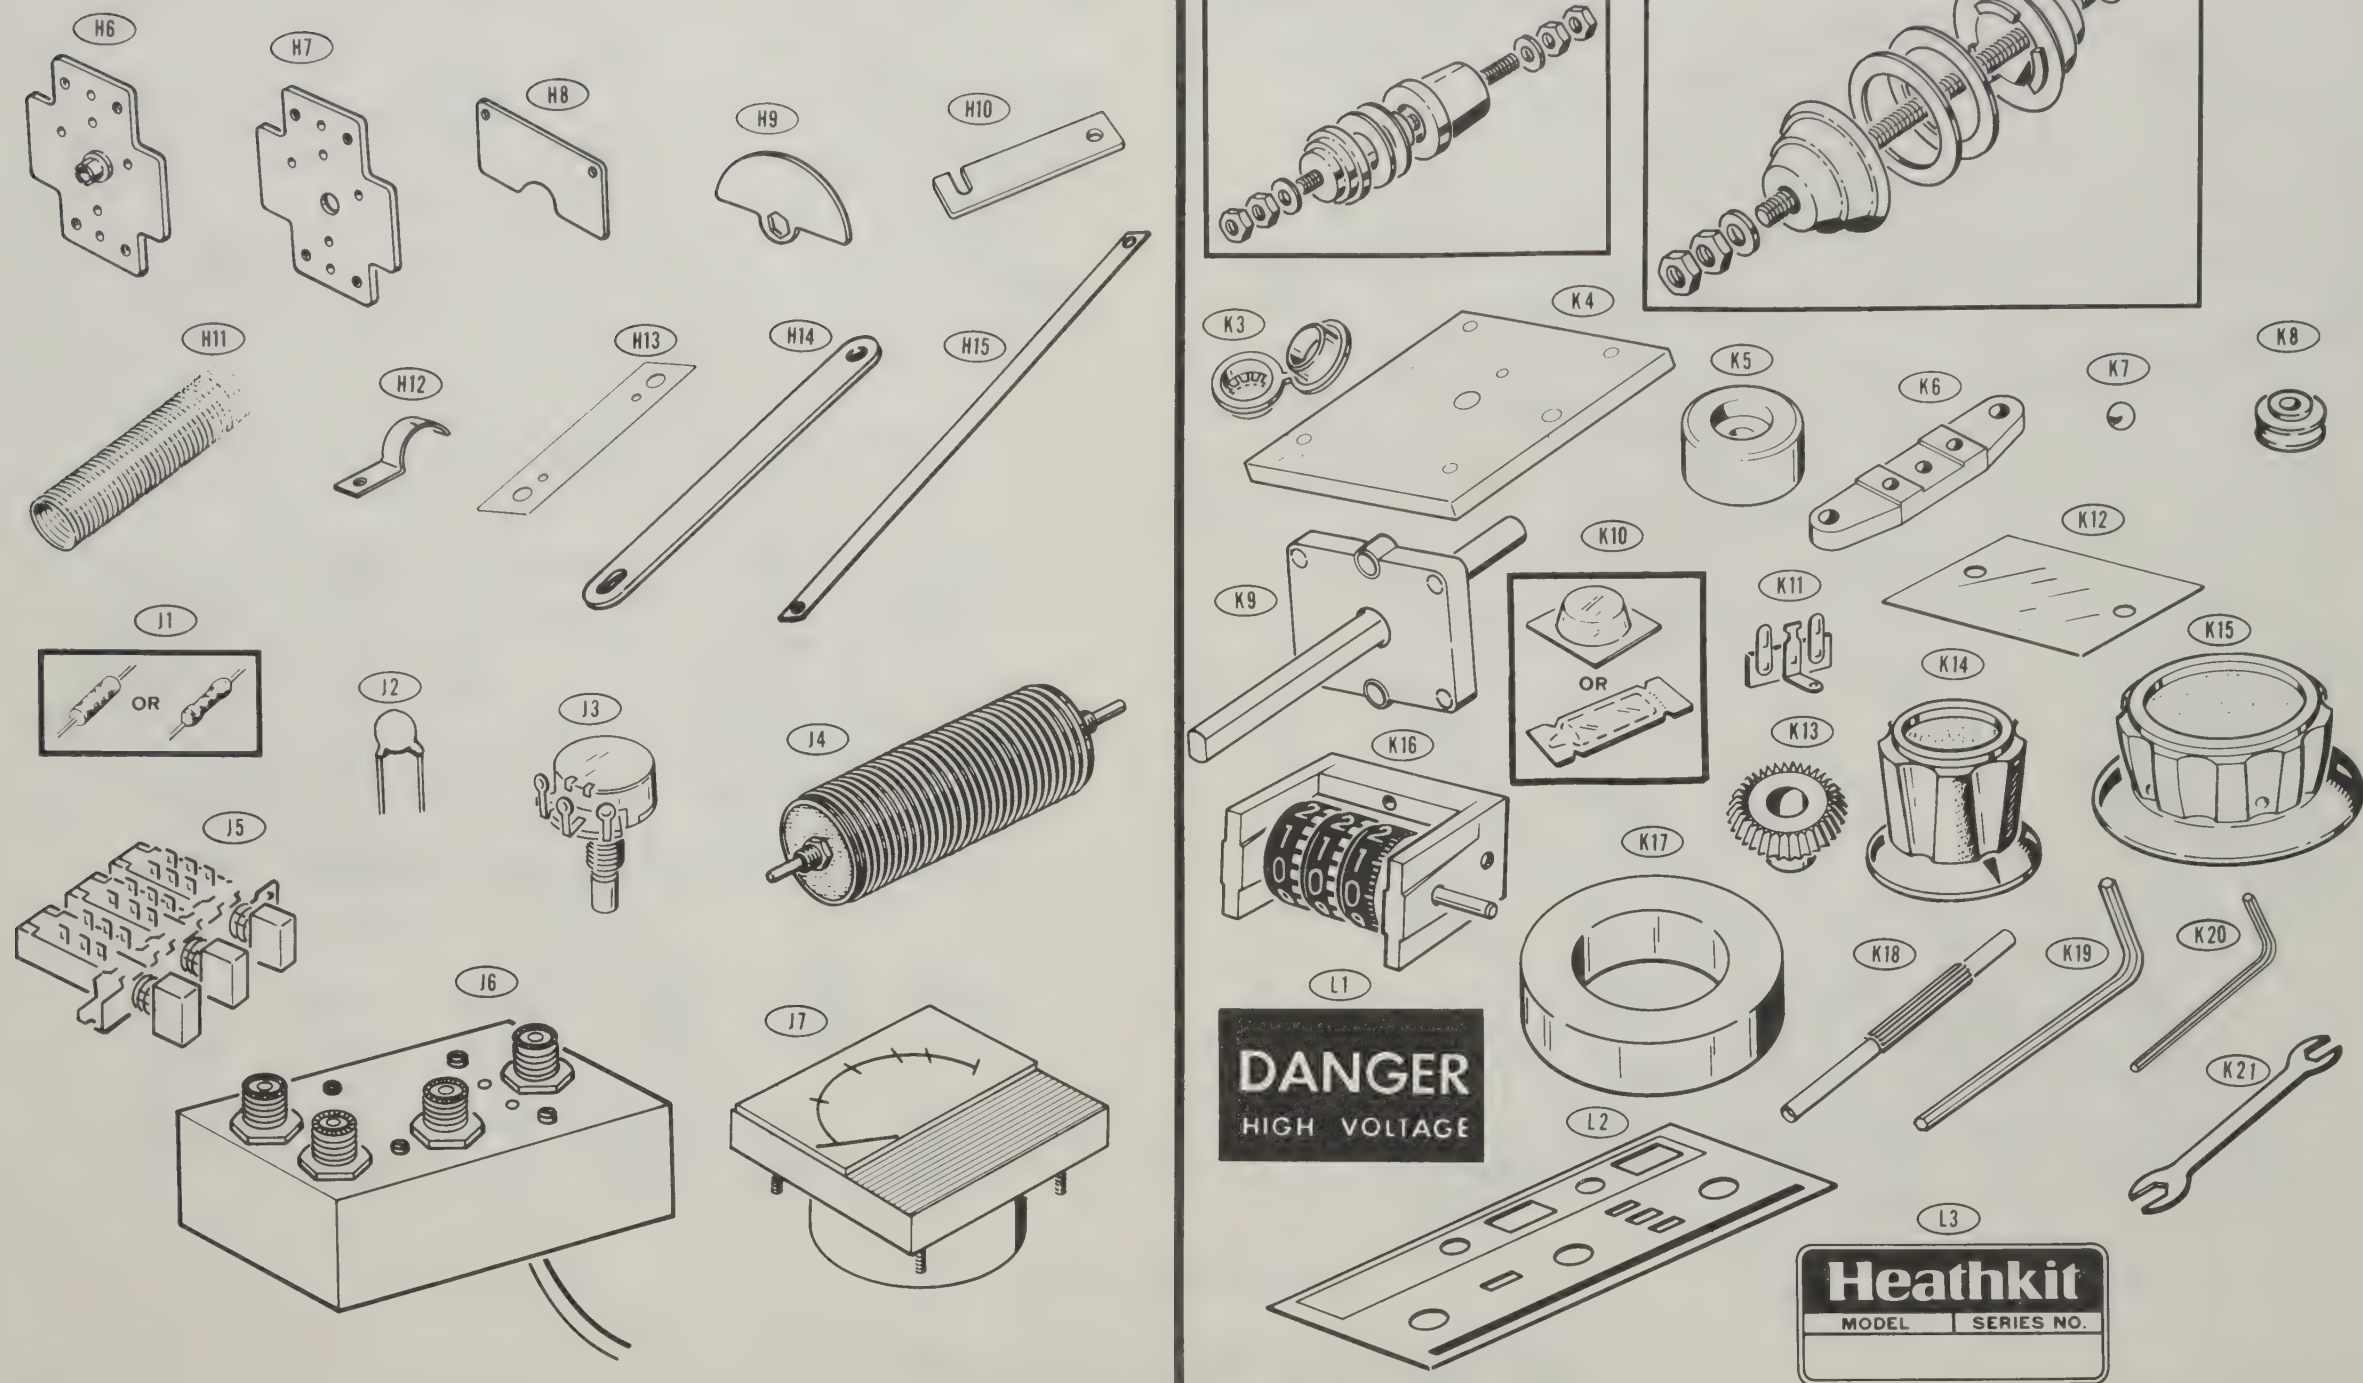
PARTS PICTORIAL








**SCHEMATIC OF THE
HEATHKIT®
DELUXE ANTENNA TUNER
MODEL SA-2060**

NOTES:


1. ALL RESISTOR VALUES ARE IN OHMS (Ω); ($K=1000$).
2. ALL RESISTORS ARE 1/4-WATT, 5% TOLERANCE UNLESS OTHERWISE NOTED.
3. CAPACITOR VALUES LESS THAN 1 ARE IN μF (MICROFARADS). VALUES OF 1 OR GREATER ARE IN PF (PICOFARADS) UNLESS OTHERWISE MARKED.
4.  THIS SYMBOL INDICATES A CHASSIS GROUND.
5.  THIS SYMBOL INDICATES A CIRCUIT BOARD GROUND.
6.  THIS SYMBOL INDICATES A CIRCUIT BOARD WIRE CONNECTION.
7. SWITCH SW101 SHOWN IN BYPASS POSITION.

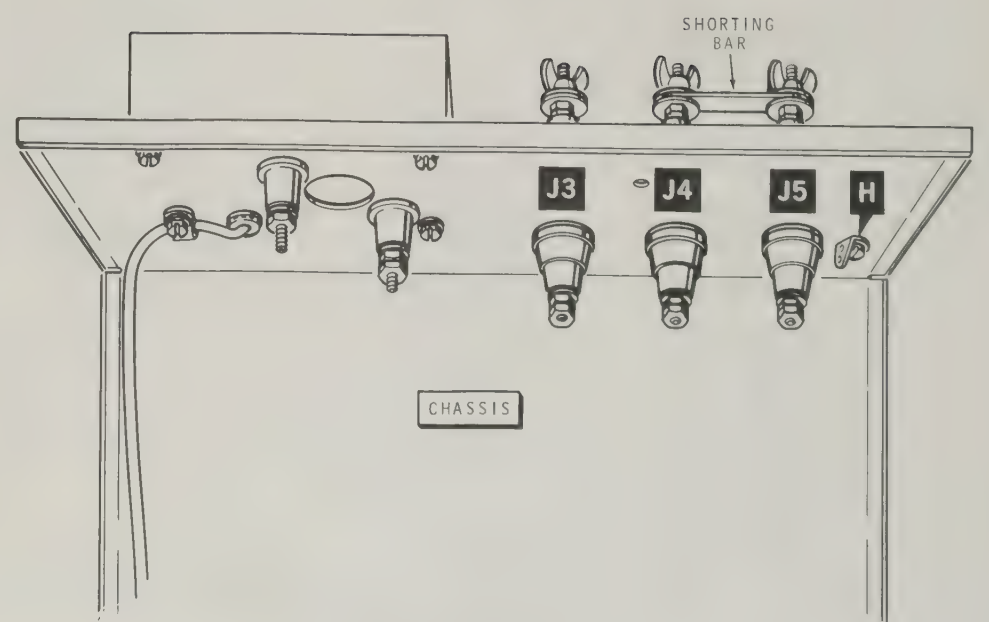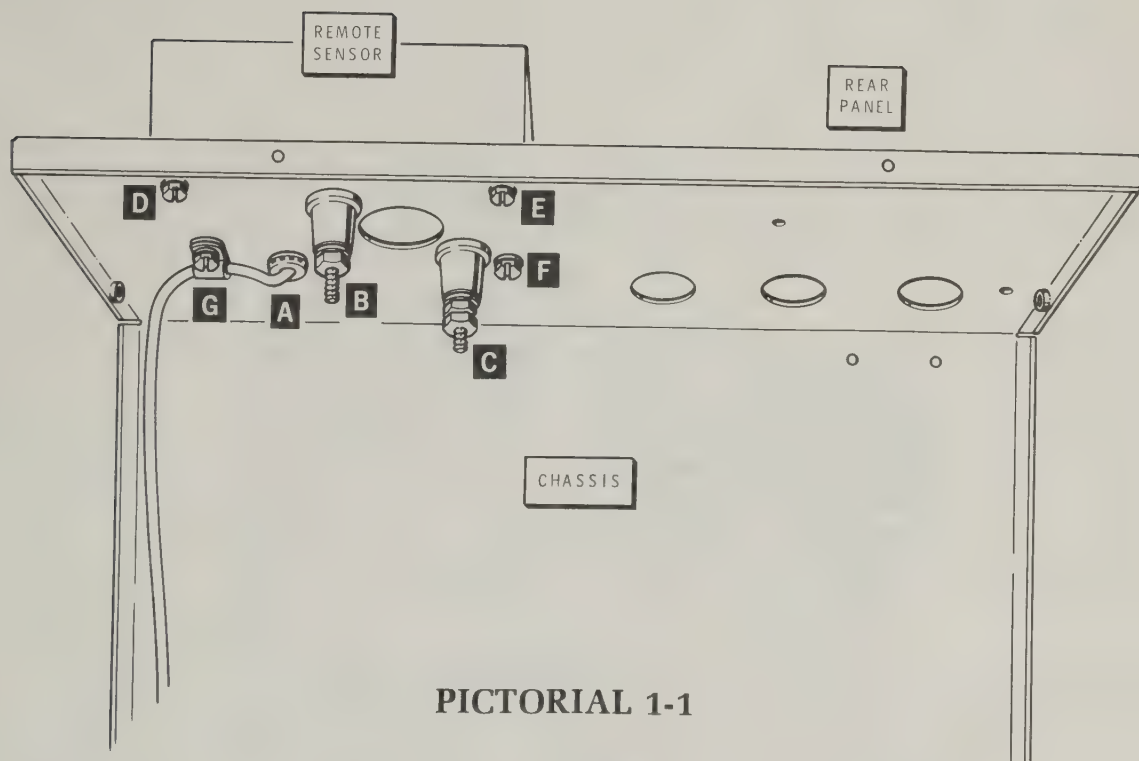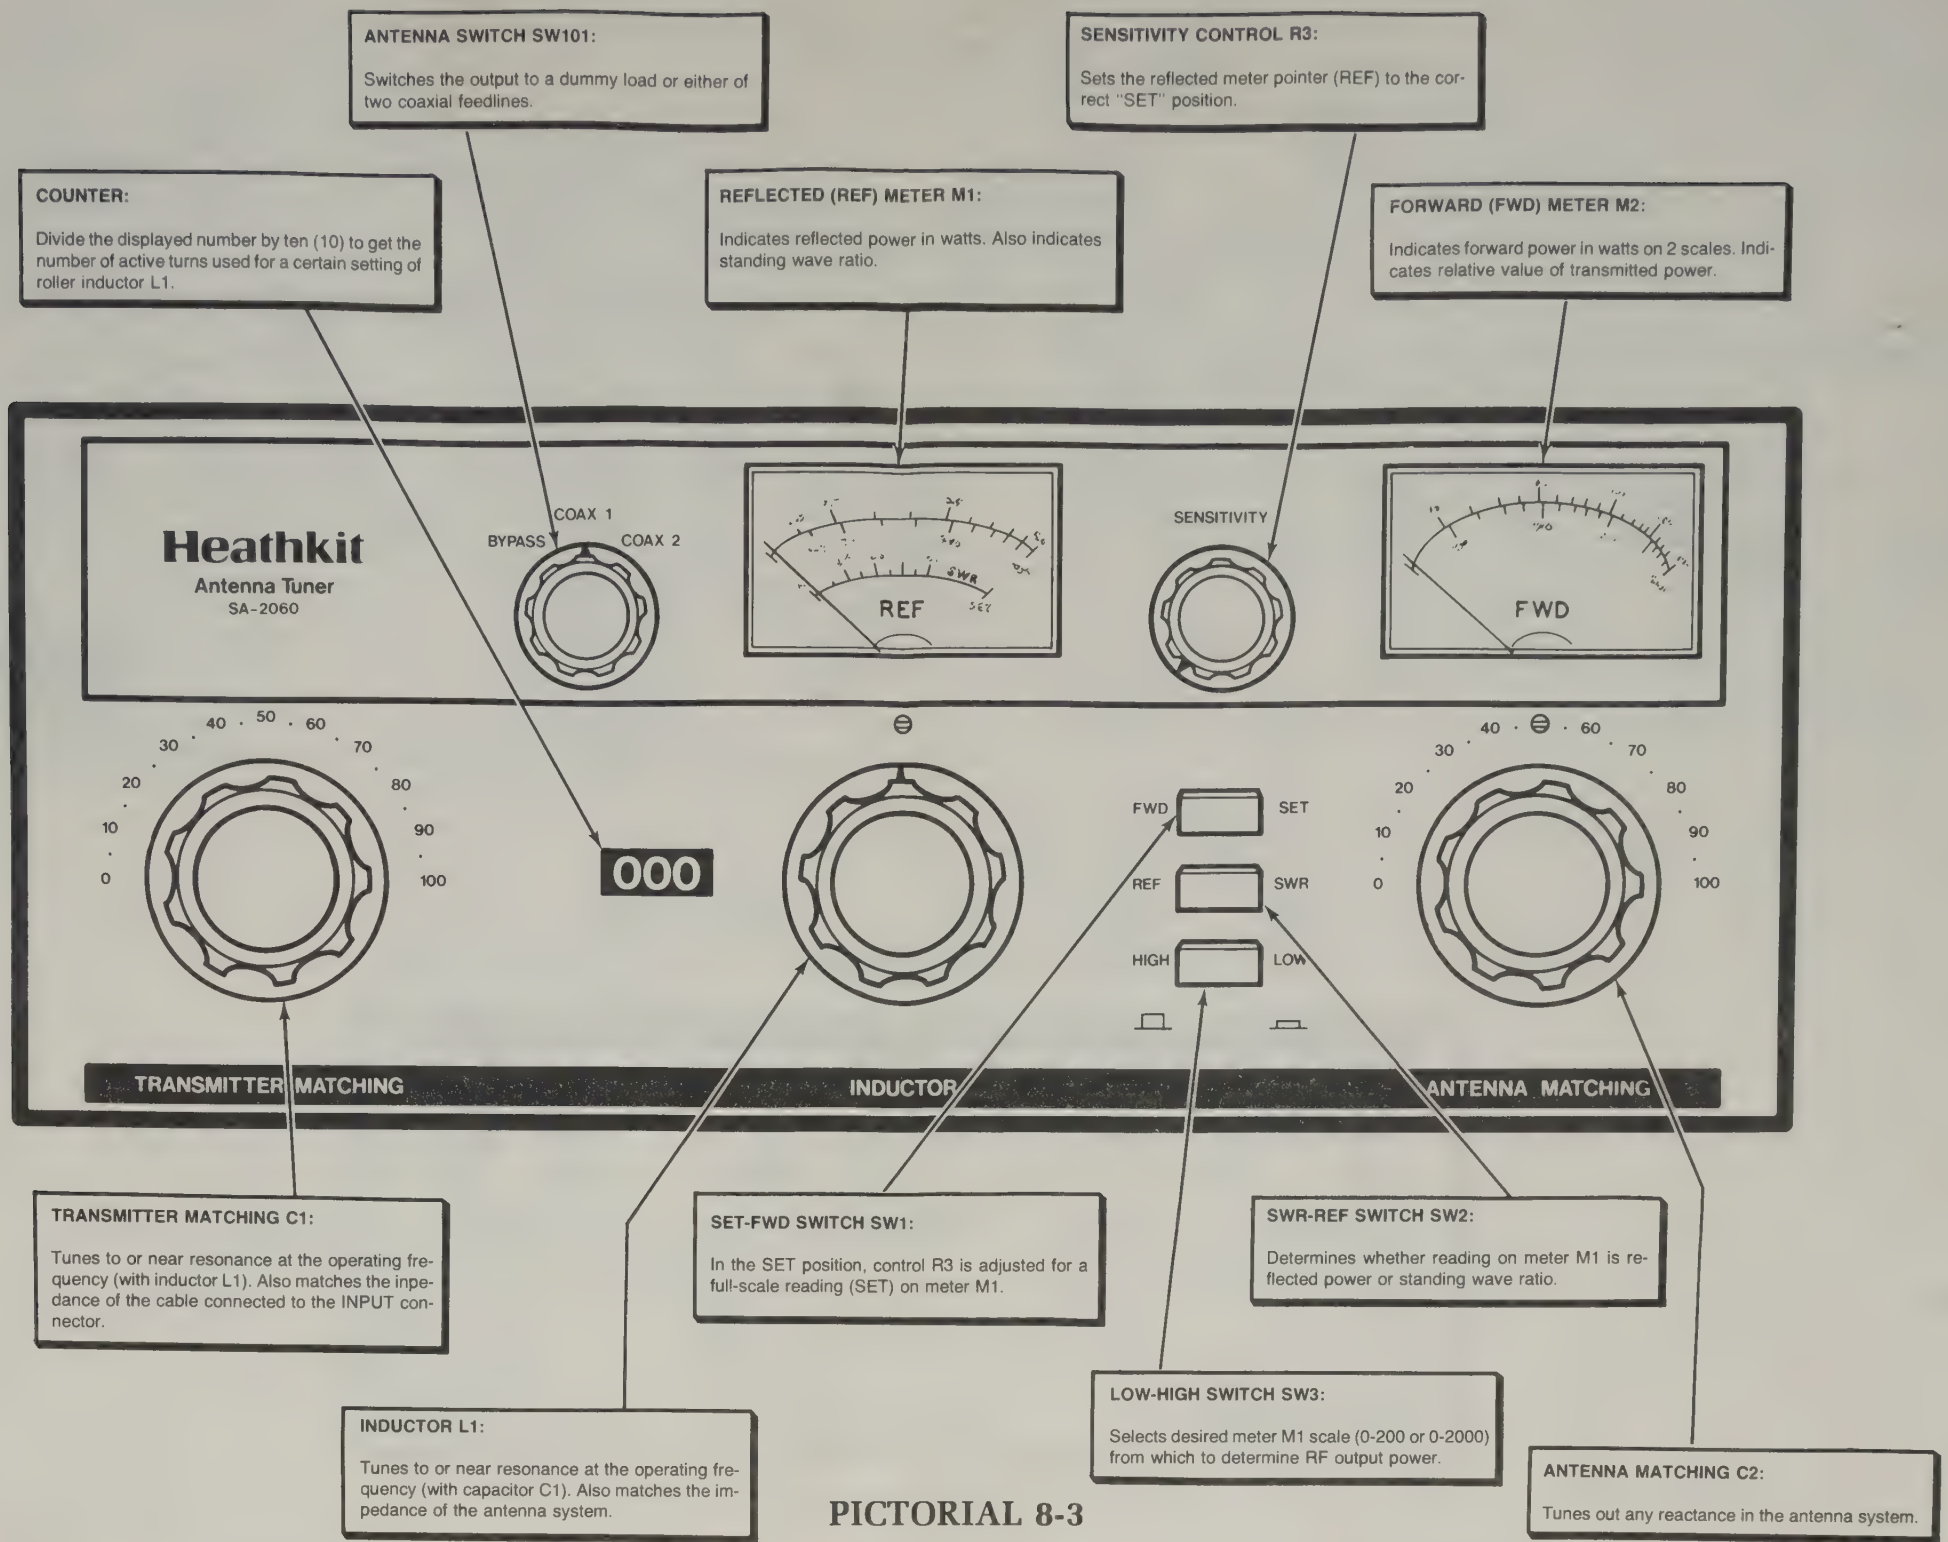

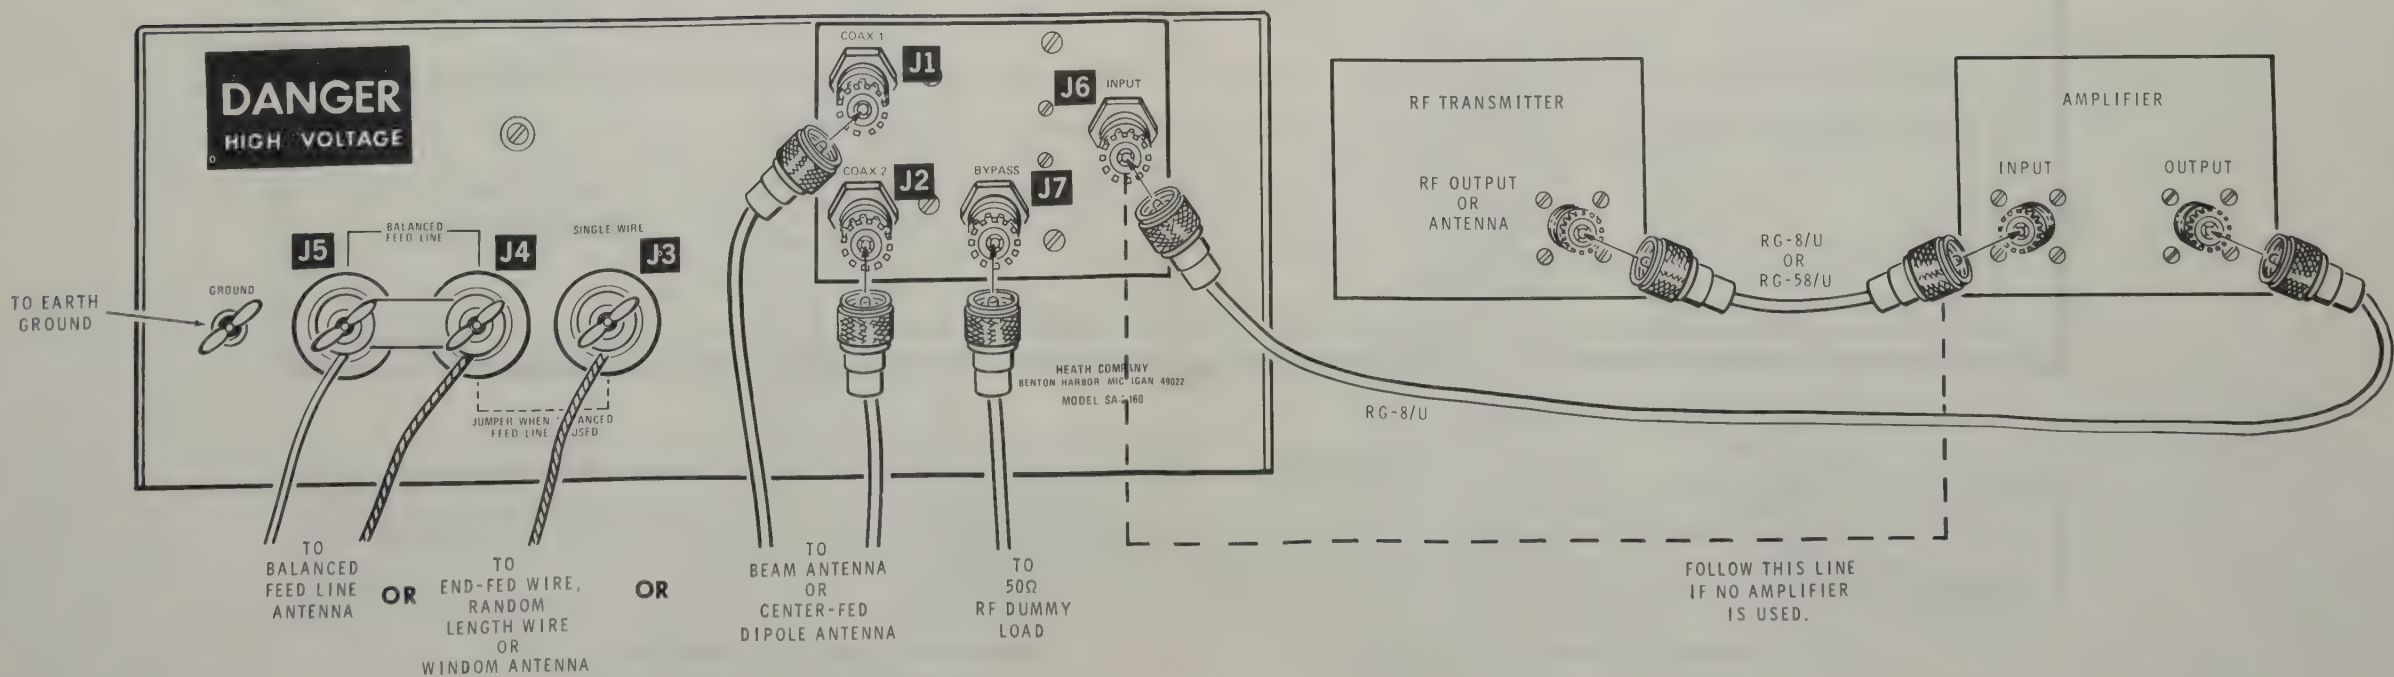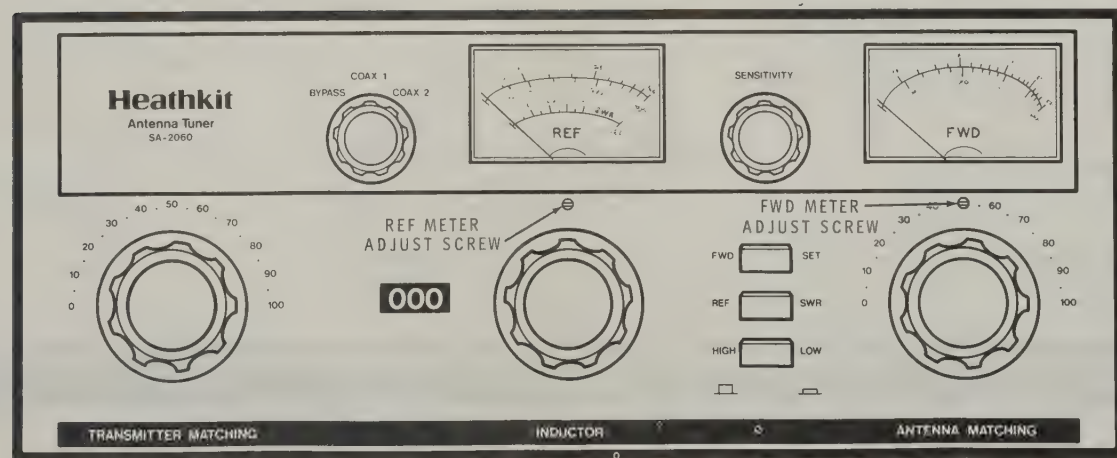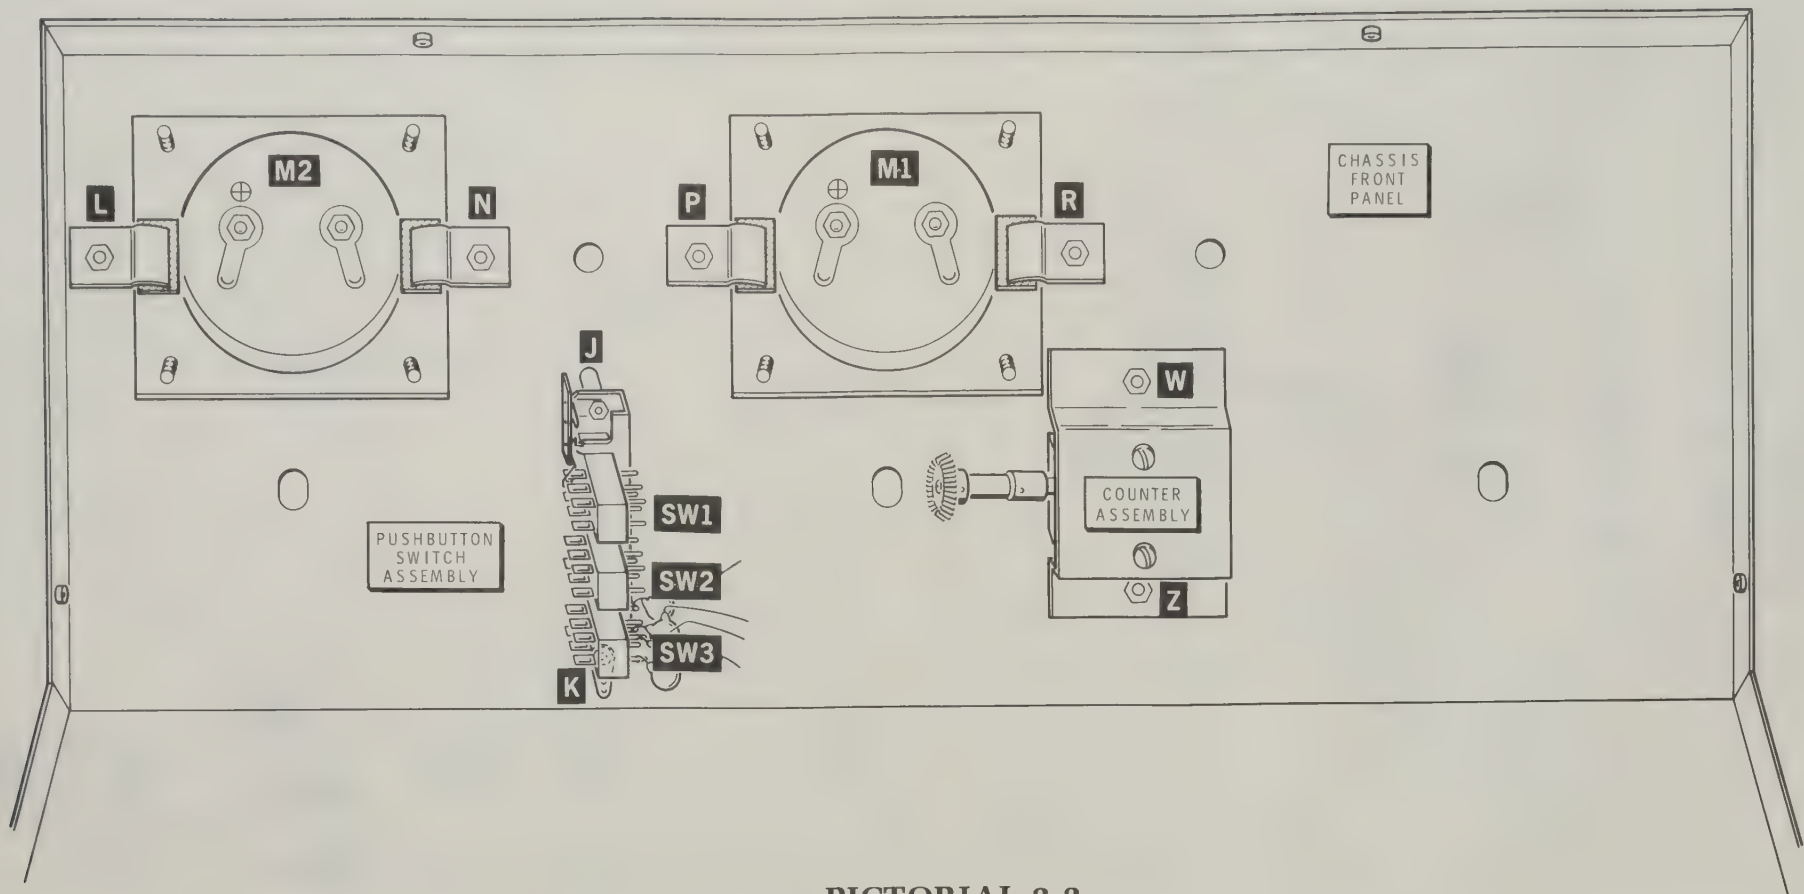


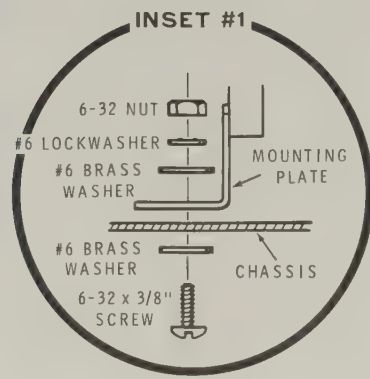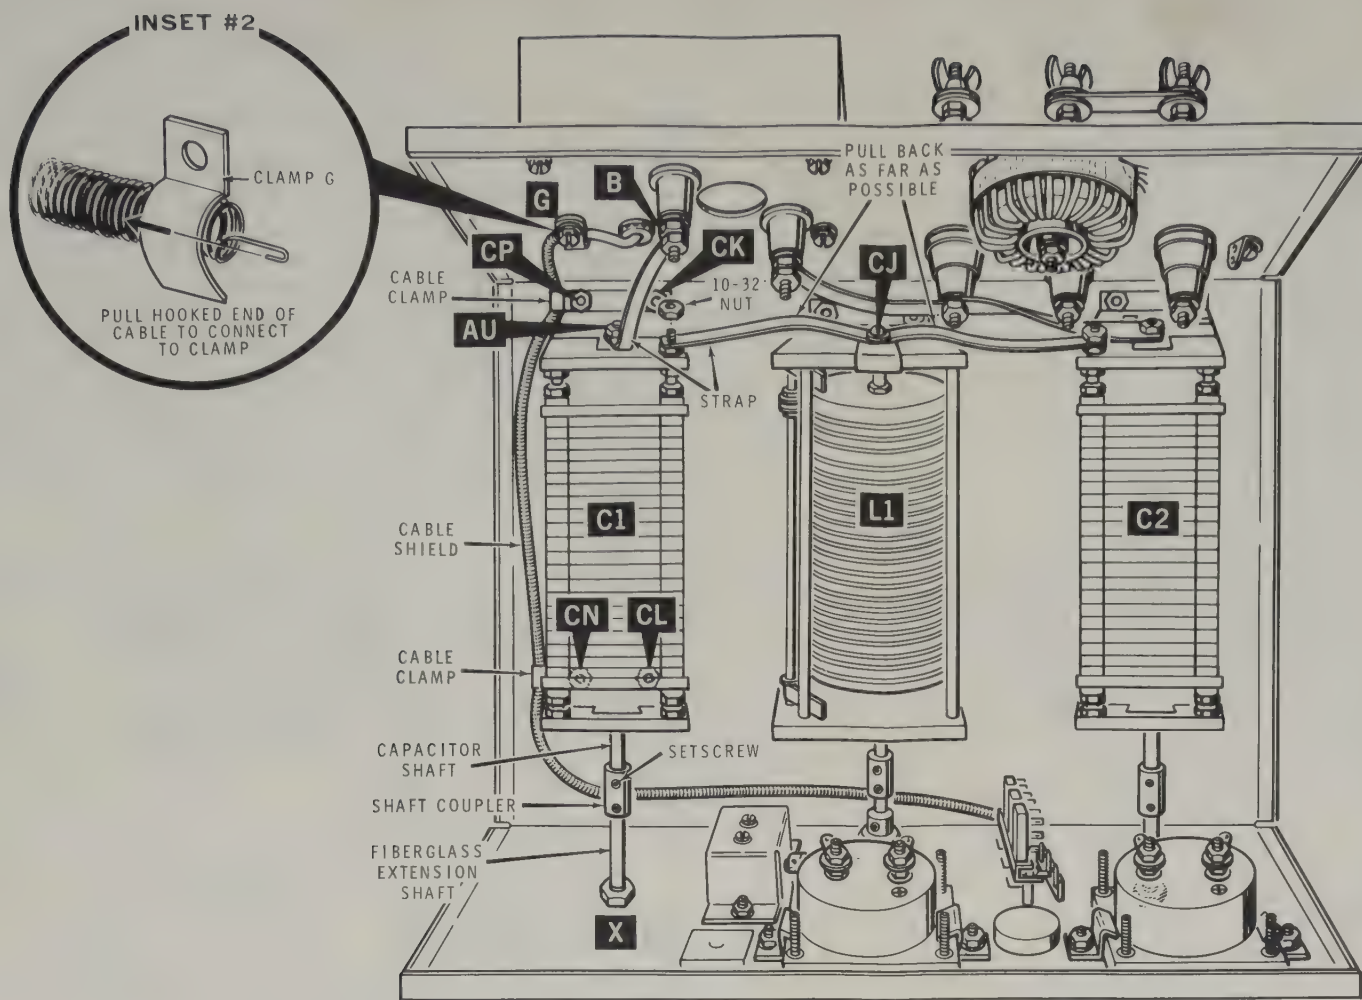


PICTORIAL 6-4

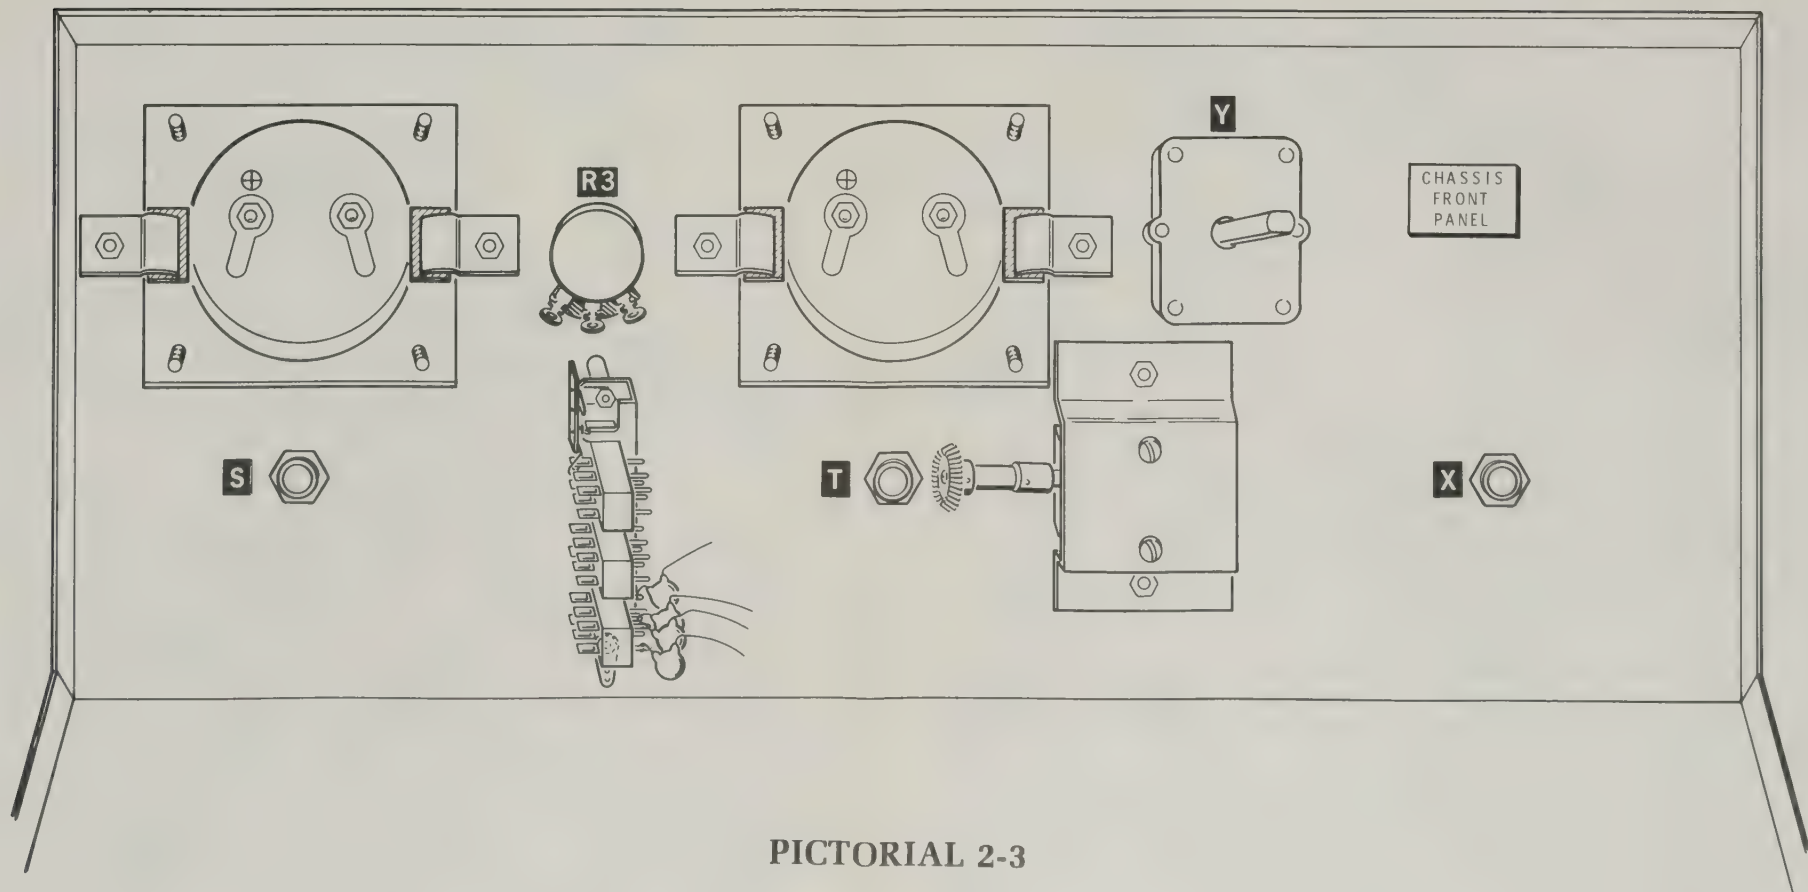


PICTORIAL 2-3

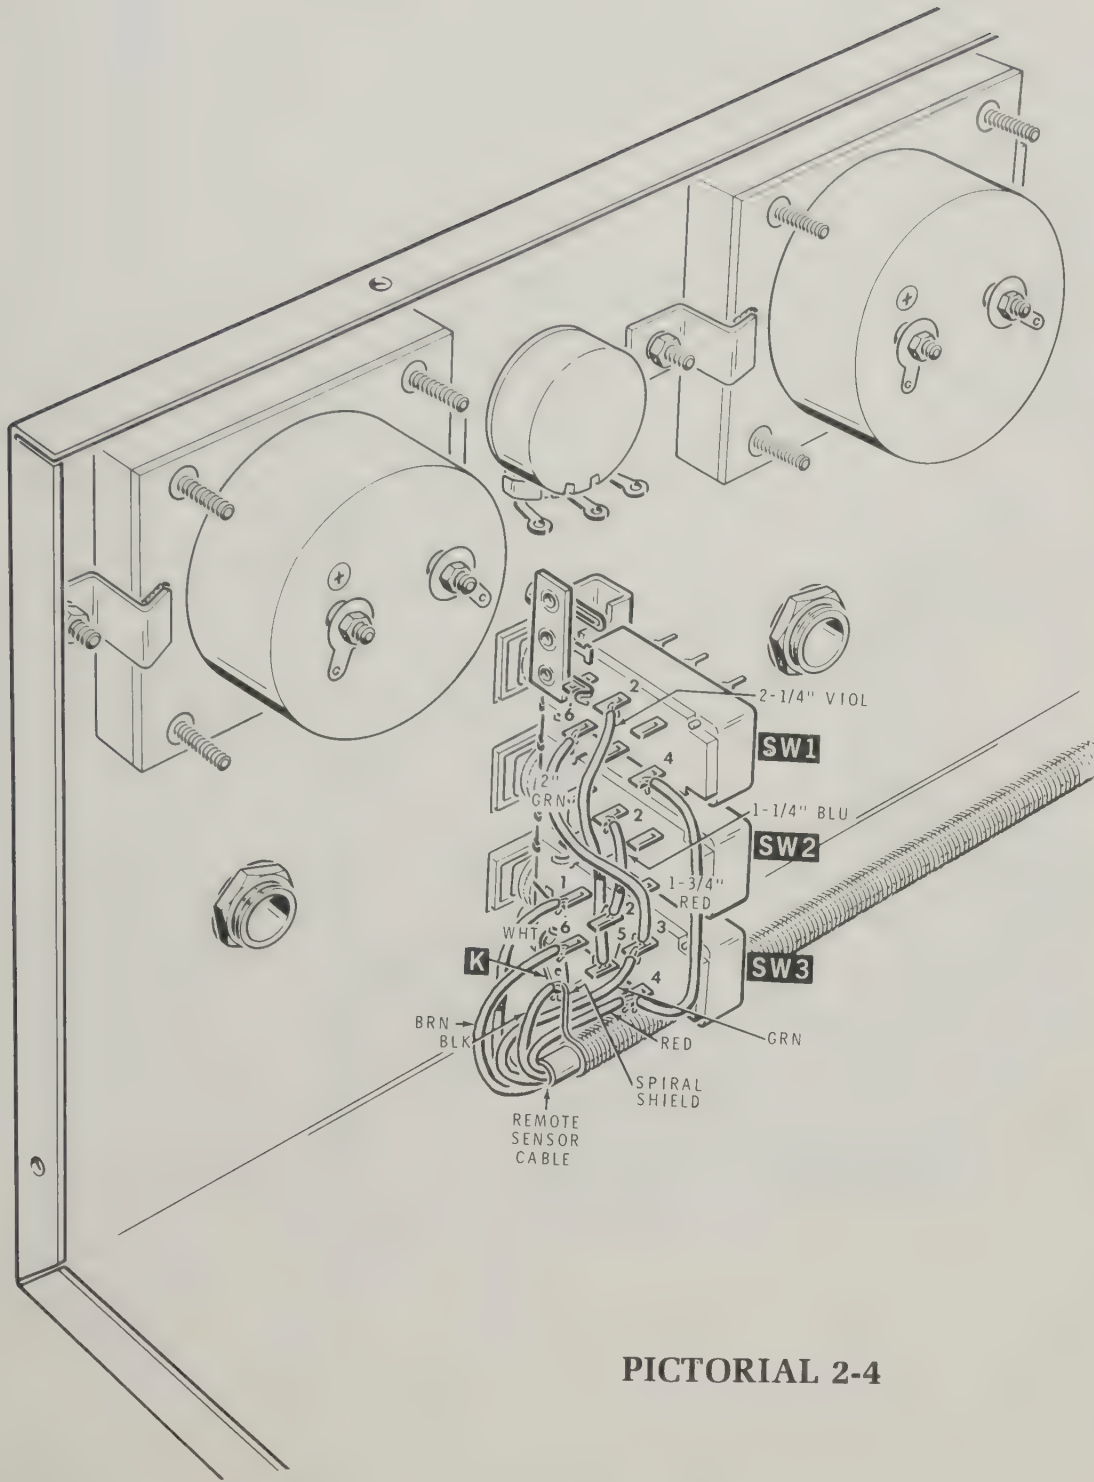


PICTORIAL 2-4

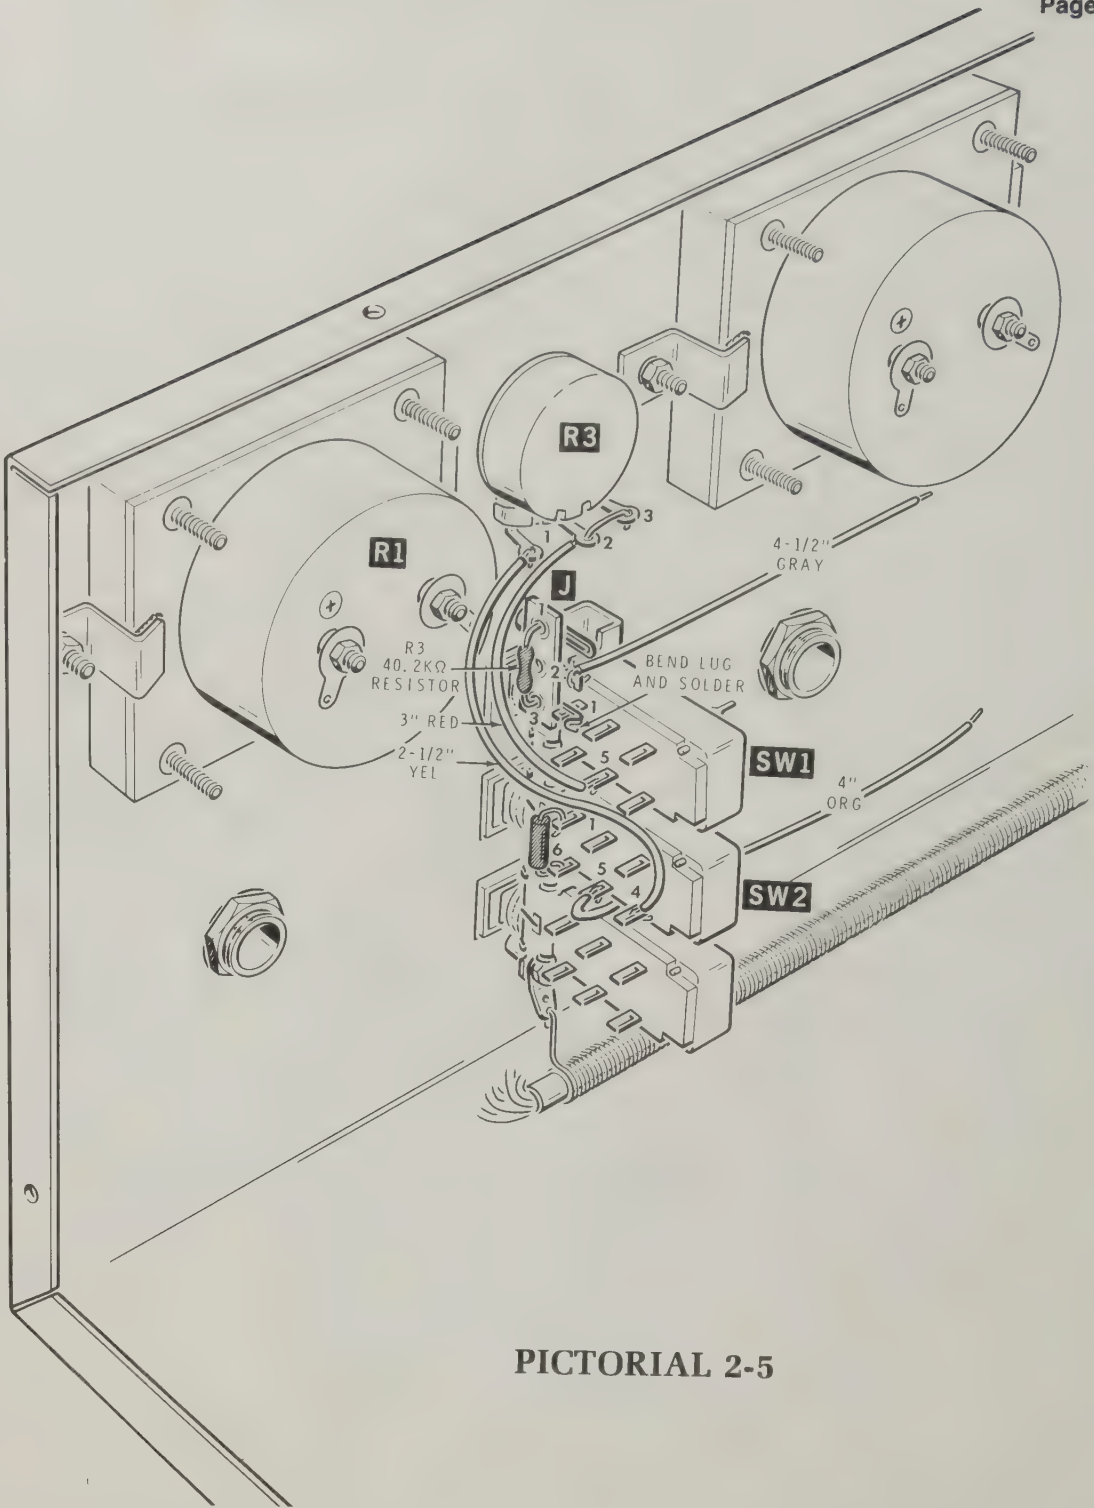



PICTORIAL 2-5

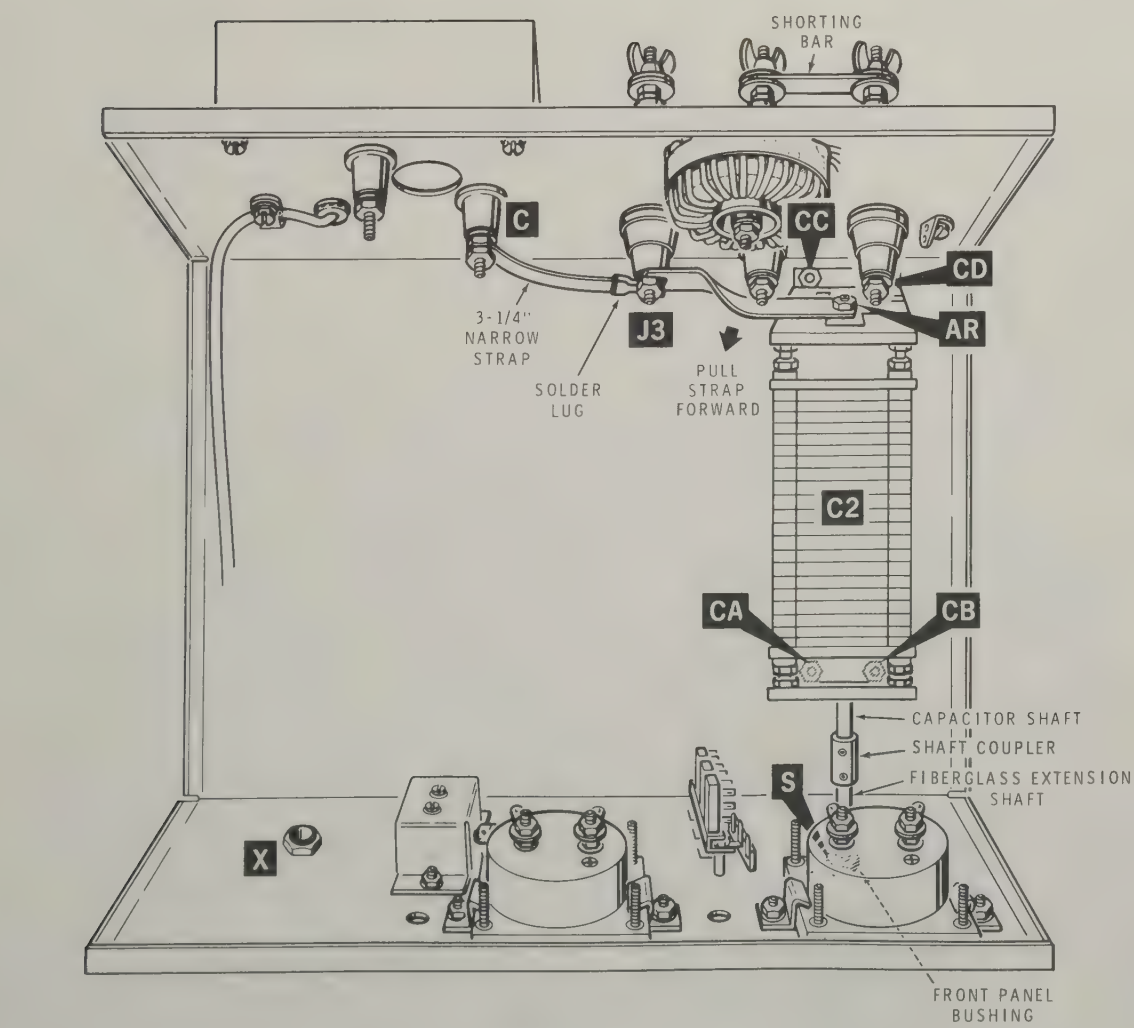


PICTORIAL 6-2

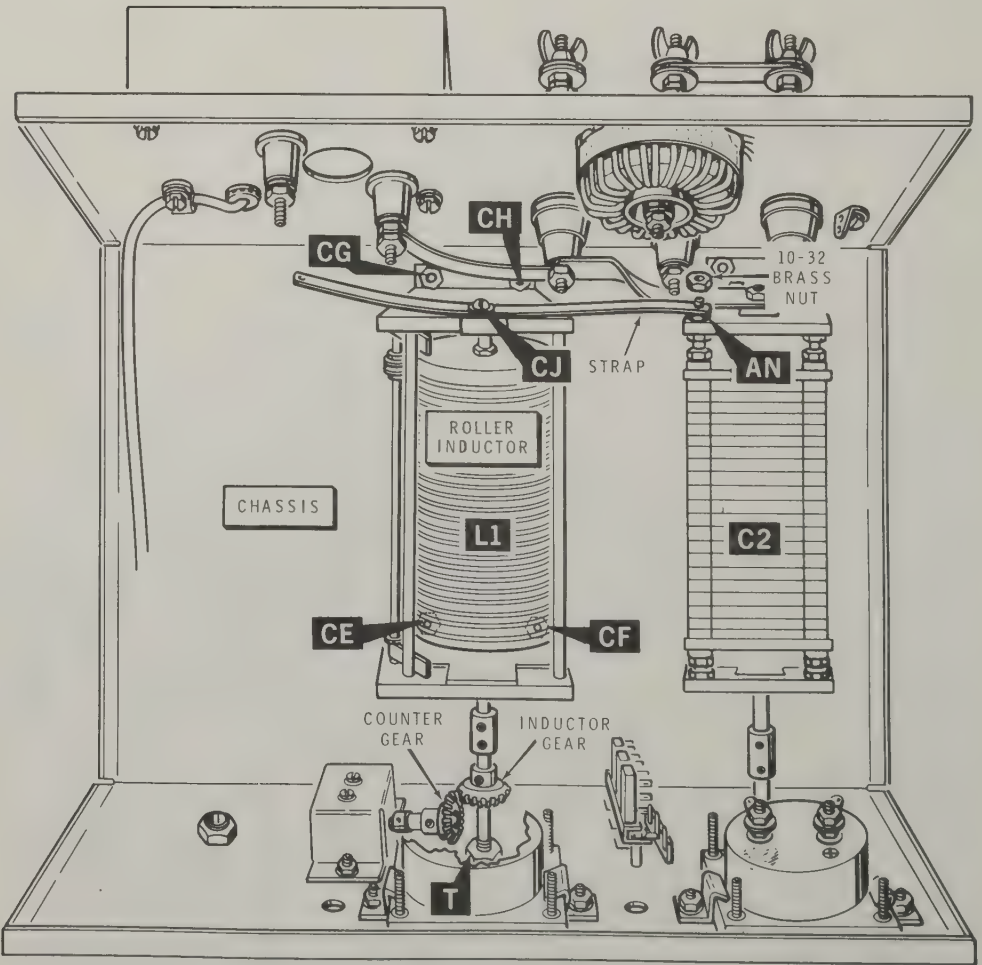


PICTORIAL 6-3

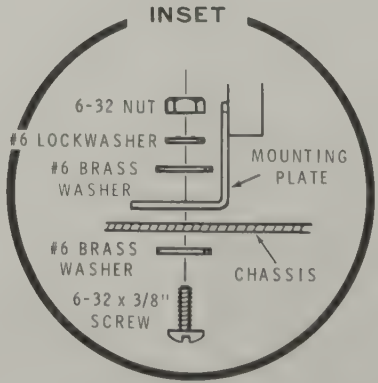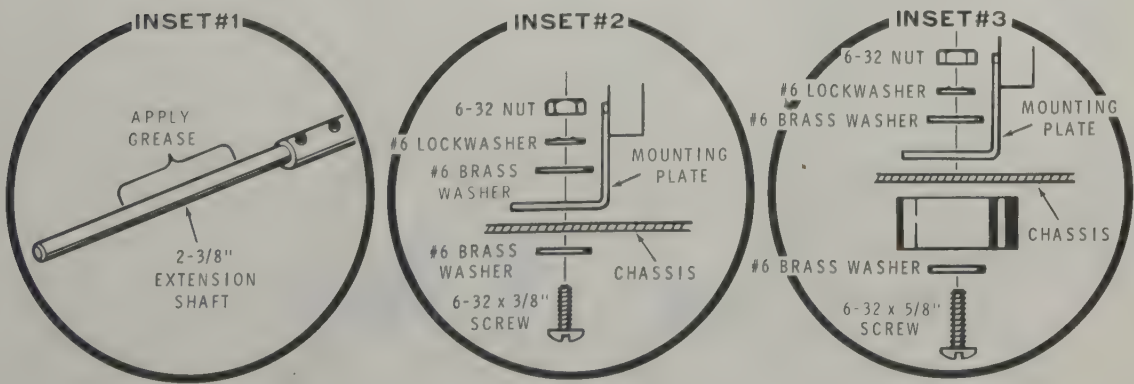


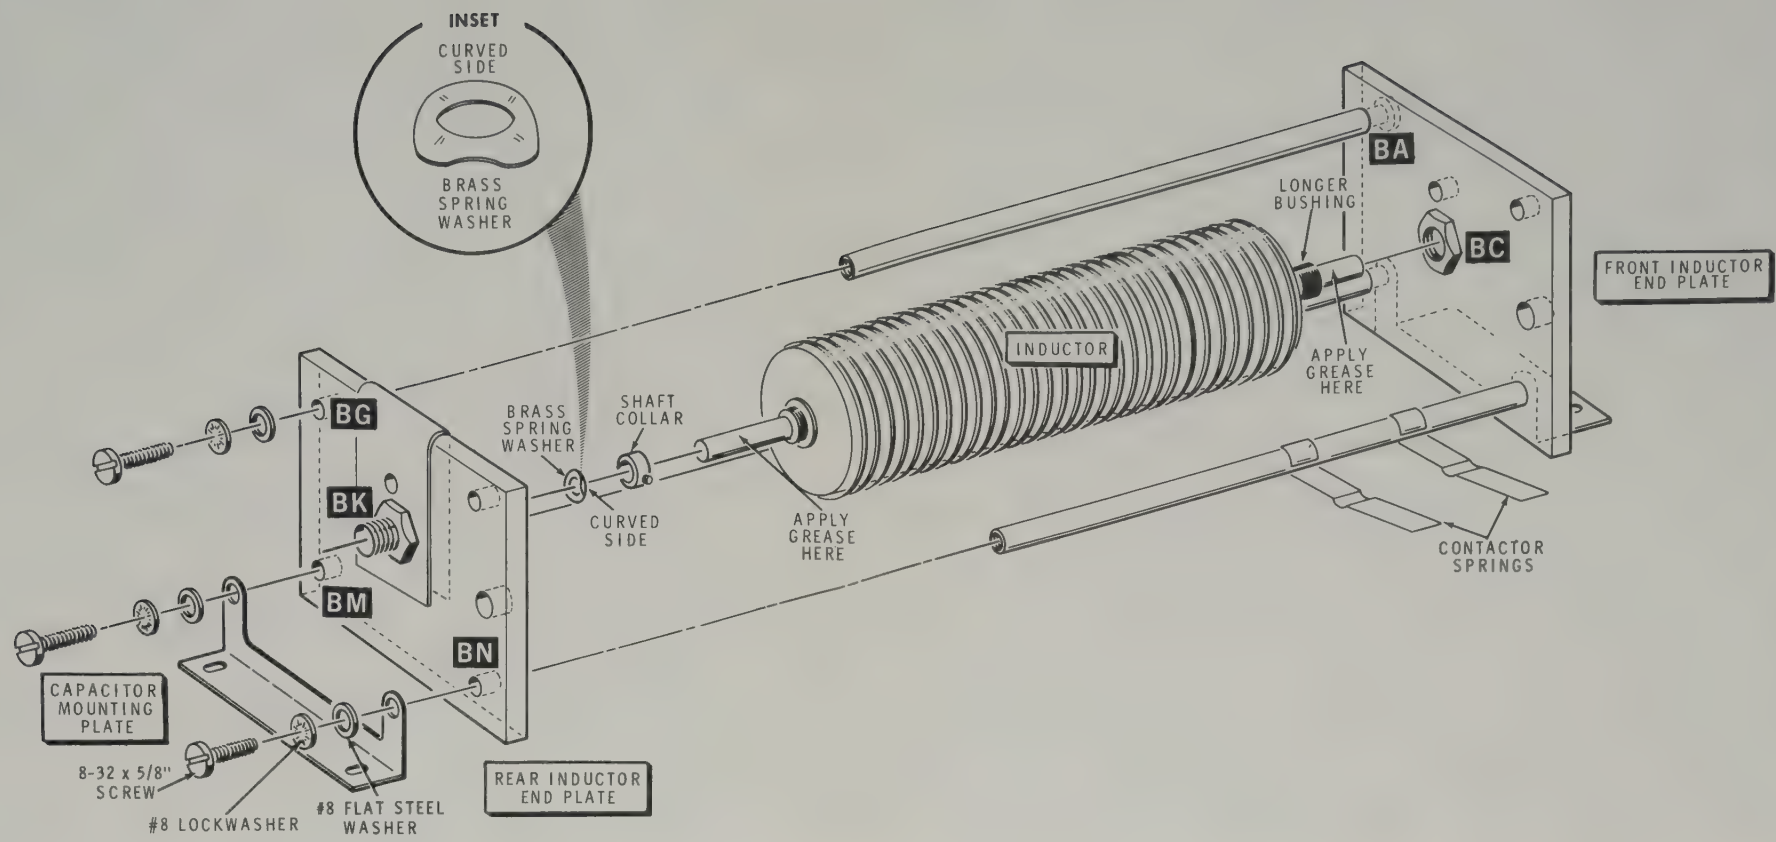


PICTORIAL 4-1

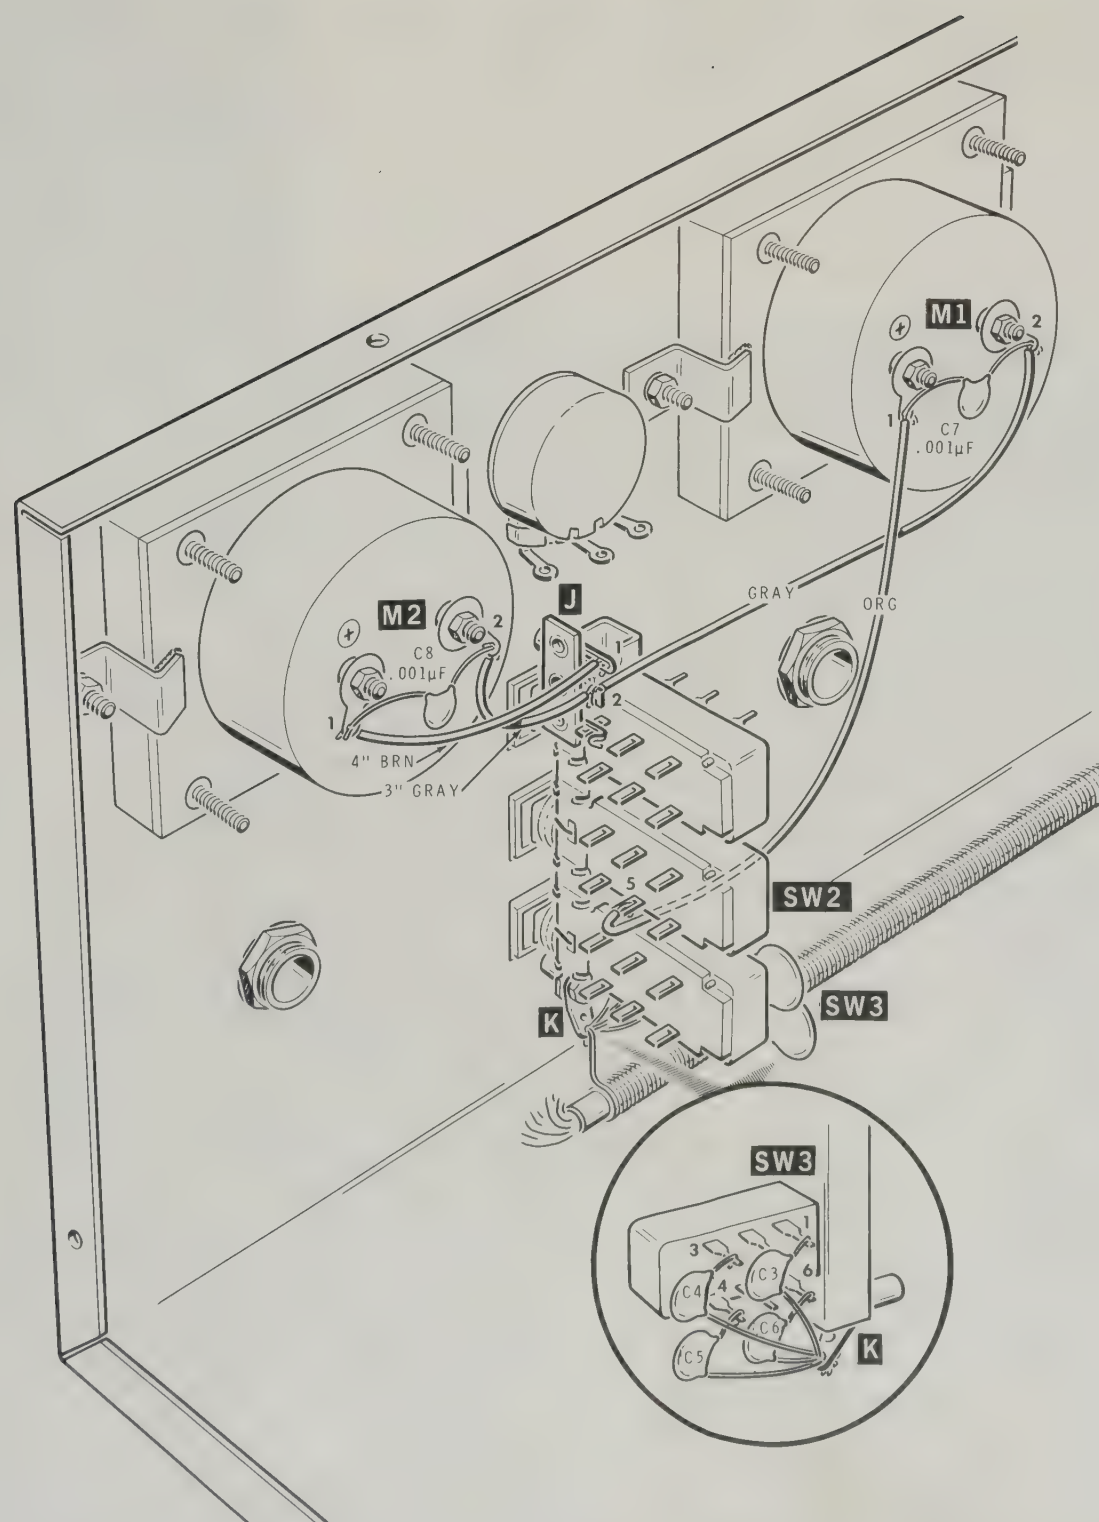


PICTORIAL 2-6

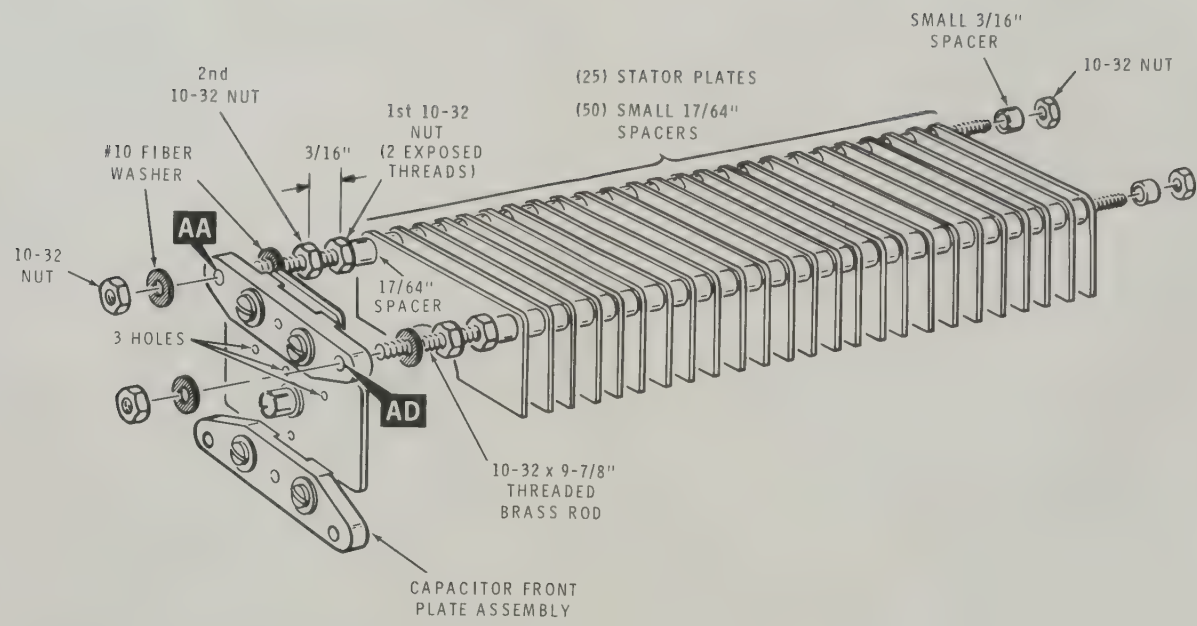

PICTORIAL 3-2

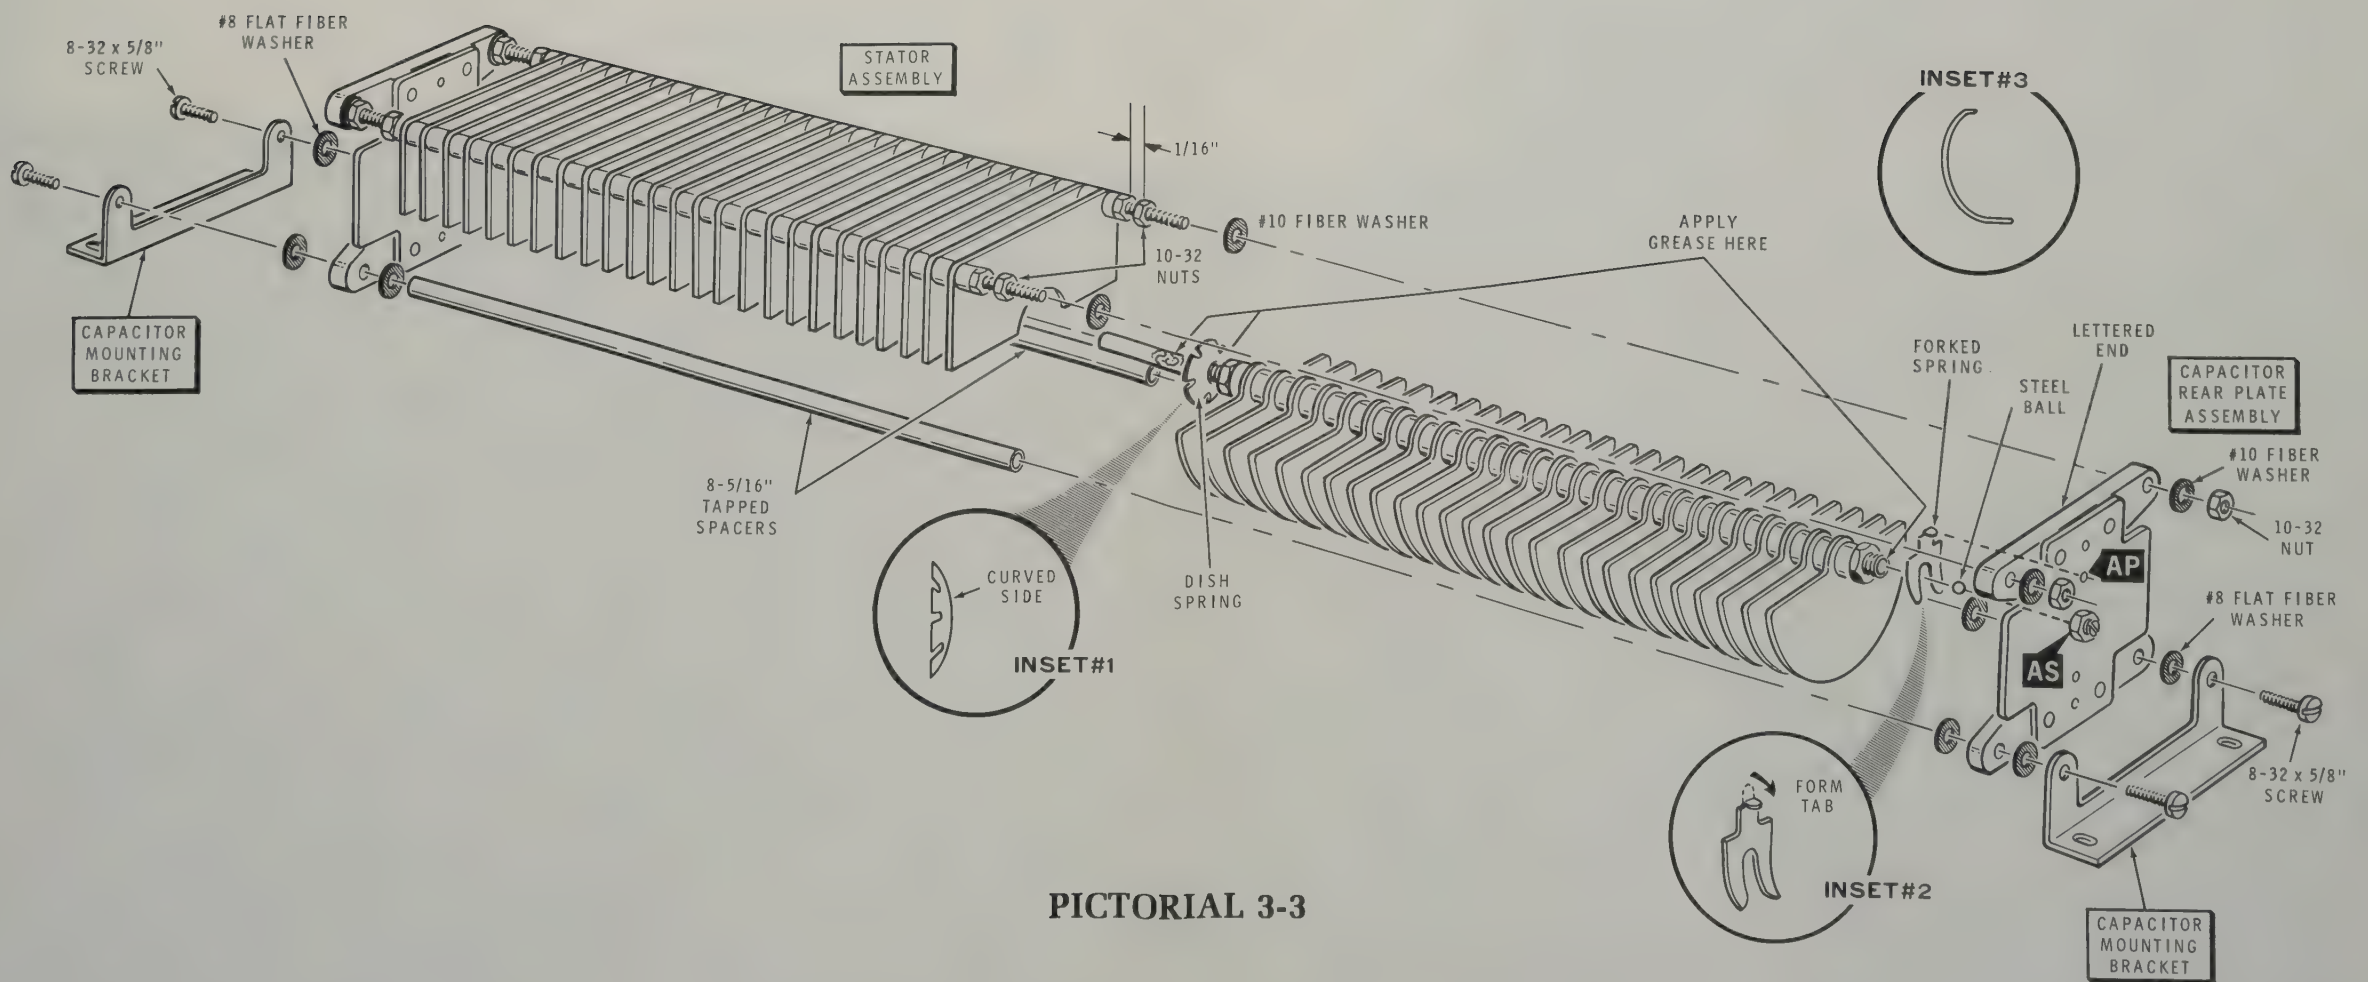

PICTORIAL 3-3



HEATH COMPANY • BENTON HARBOR, MICHIGAN 49022
TLX 72-9421

IMPORTANT NOTICE

Please make the following changes in your Manual before you start to assemble your kit.

Page 15 - In the middle of the left column, add the following sentence to the NOTE.

"Solder each capacitor lead to the lug as you install it."

Page 21 - Left column, Detail 2-3B.

Cross out the control flat washer.

Left column, first step.

Cross out control flat washer.

Thank you,

HEATH COMPANY

Heathkit®

P-0

SA-2060/595-2514
591-3588



HEATH COMPANY • BENTON HARBOR, MICHIGAN 49022
TLX 72-9421



IMPORTANT NOTICE

The blue and white label (#391-XX) called for in your Parts List may not be supplied with your kit. In its place, please look for a plain white label with the Model and Series numbers of your kit. Use this label when the blue and white label is called for. NOTE: You may have to trim the white substitute label slightly to fit into the area designated in the Manual step.

Thank you,

HEATH COMPANY

591-2063



